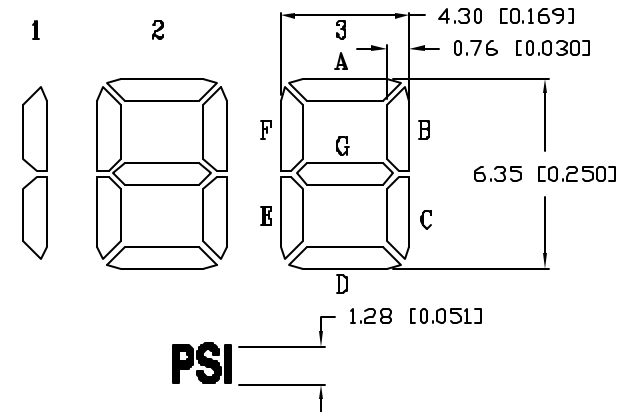
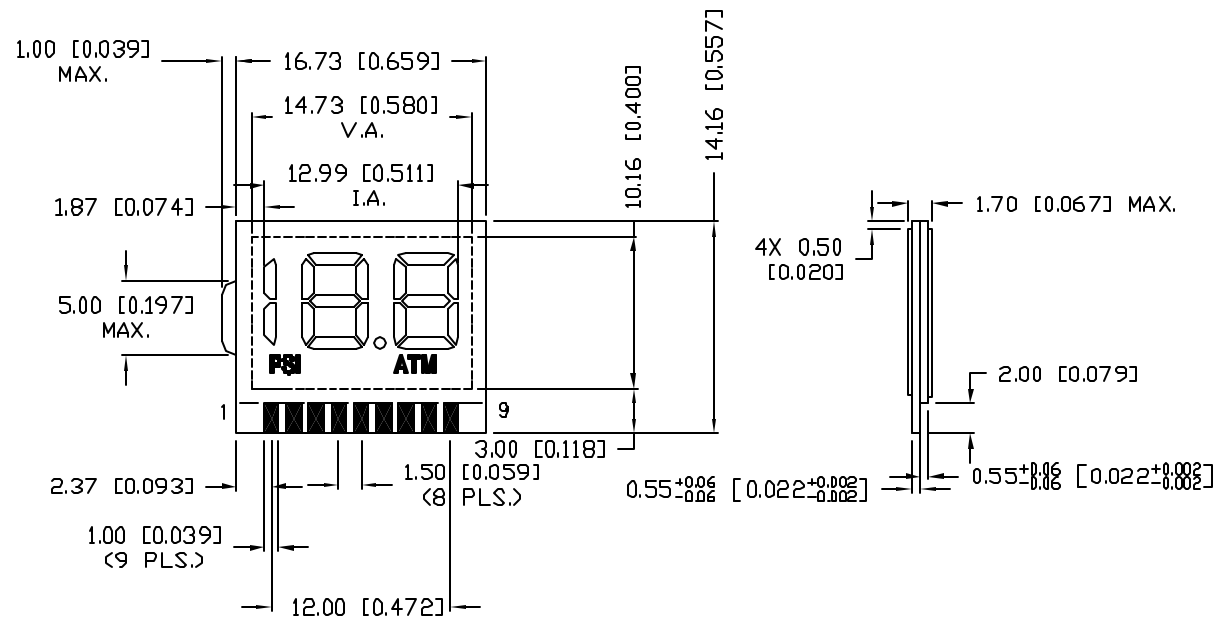


REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	02.07.07

DIGIT DETAIL

CHARACTERISTICS	
FLUID TYPE:	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	12:00
DISPLAY MODE:	TRANSFLECTIVE
OPERATING VOLTAGE:	2.3V AC.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHODE:	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE:	9 PADS

PIN	1	2	3	4	5	6	7	8	9
COM1	COM1					2A	2B	3A	3B
COM2		COM2				2F	2G	3F	3G
COM3			COM3		1BC	2E	2C	3E	3C
COM4				COM4	PSI	2D	P	3D	ATM

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION
-0.00 MAX.=+0.00
-DECIMAL PRECISION

REV. A	PART NUMBER LCD-S2X1M25TF-1D	CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES. RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.		290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw		
2.5 DIGIT CUSTOM LCD PANEL, TN, TRANSFLECTIVE, 12:00 VIEW, ELASTOMER CONNECTION.			DRAWN BY: JC	CHECKED BY:	APPROVED BY:	DATE: 11.06.06 PAGE: 1 OF 1 SCALE: N/A