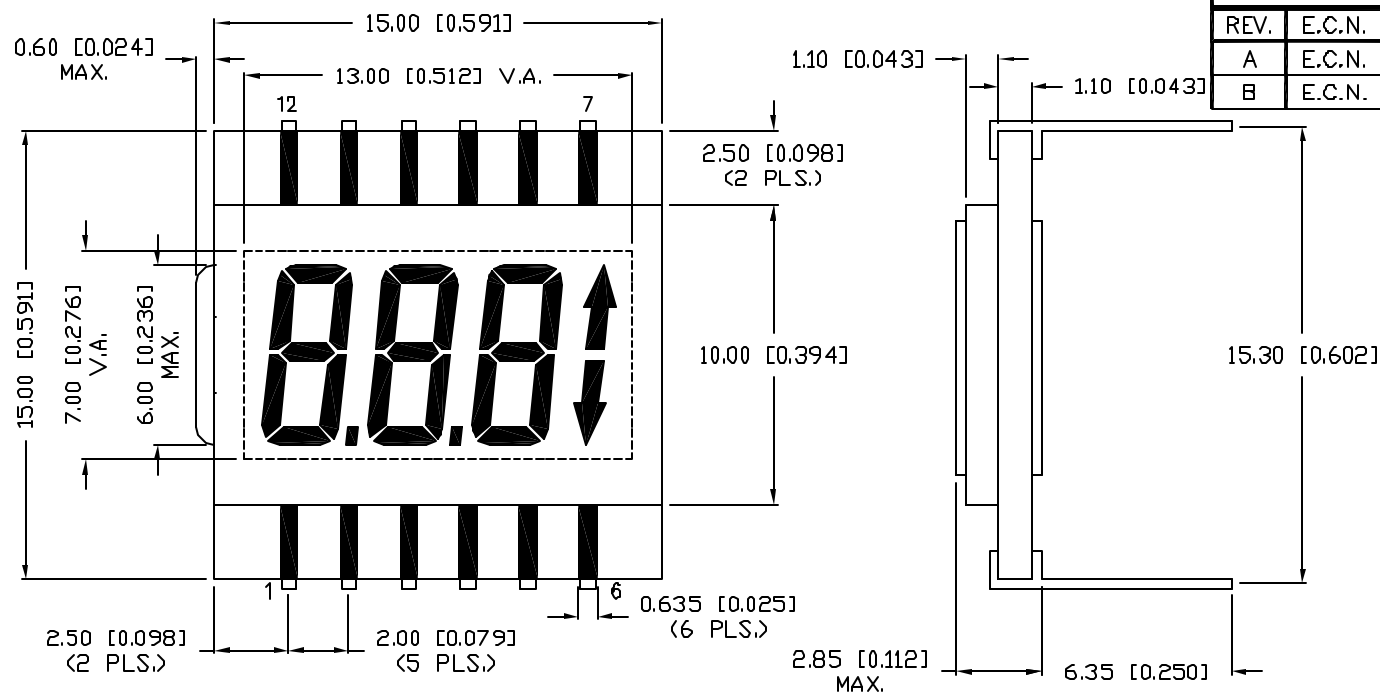


UNCONTROLLED DOCUMENT



PART NUMBER
LCD-S301M24TF

REV.

B

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #10663.	9.29.00
B	E.C.N. #11148.	02.08.07

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	3.0~5.0V A.C.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHOD	1/3 DUTY 1/3 BIAS
CONNECTION TYPE	12 PINS

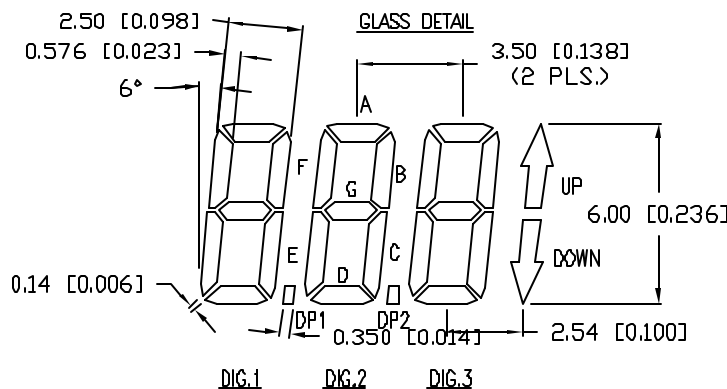

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12
COM1		1F	1A			COM1	UP	3A	3F		2A	2F
COM2	COM2	1E	1G	1B			3B	3G	3E	2B	2G	2E
COM3		1D	1C	DP1	COM3		DOWN	3C	3D	DP2	2C	2D

Pb

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN=+DECIMAL PRECISION -0.00, MAX.=+0.00 -DECIMAL PRECISION

REV.

B

PART NUMBER

LCD-S301M24TF

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

A

0.24" DIGITS, CUSTOM LCD PANEL, TN, TRANSFLECTIVE,
6:00 VIEW, STANDARD OPERATING TEMPERATURE.

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 9.20.00

PAGE: 1 OF 1

SCALE: N/A