

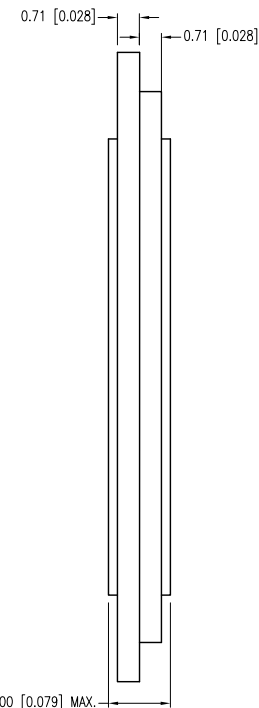



PART NUMBER	LCD-S301M26KF-D	REV.	E
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
08.25.09	E.C.N. #11583.		A
11.04.09	E.C.N. #11597.		B
12.22.09	E.C.N. #11605.		C
01.25.11	E.C.N. #11692.		D
06.30.11	E.C.N. #10BRDR. & REDRAWN/#11734.		E

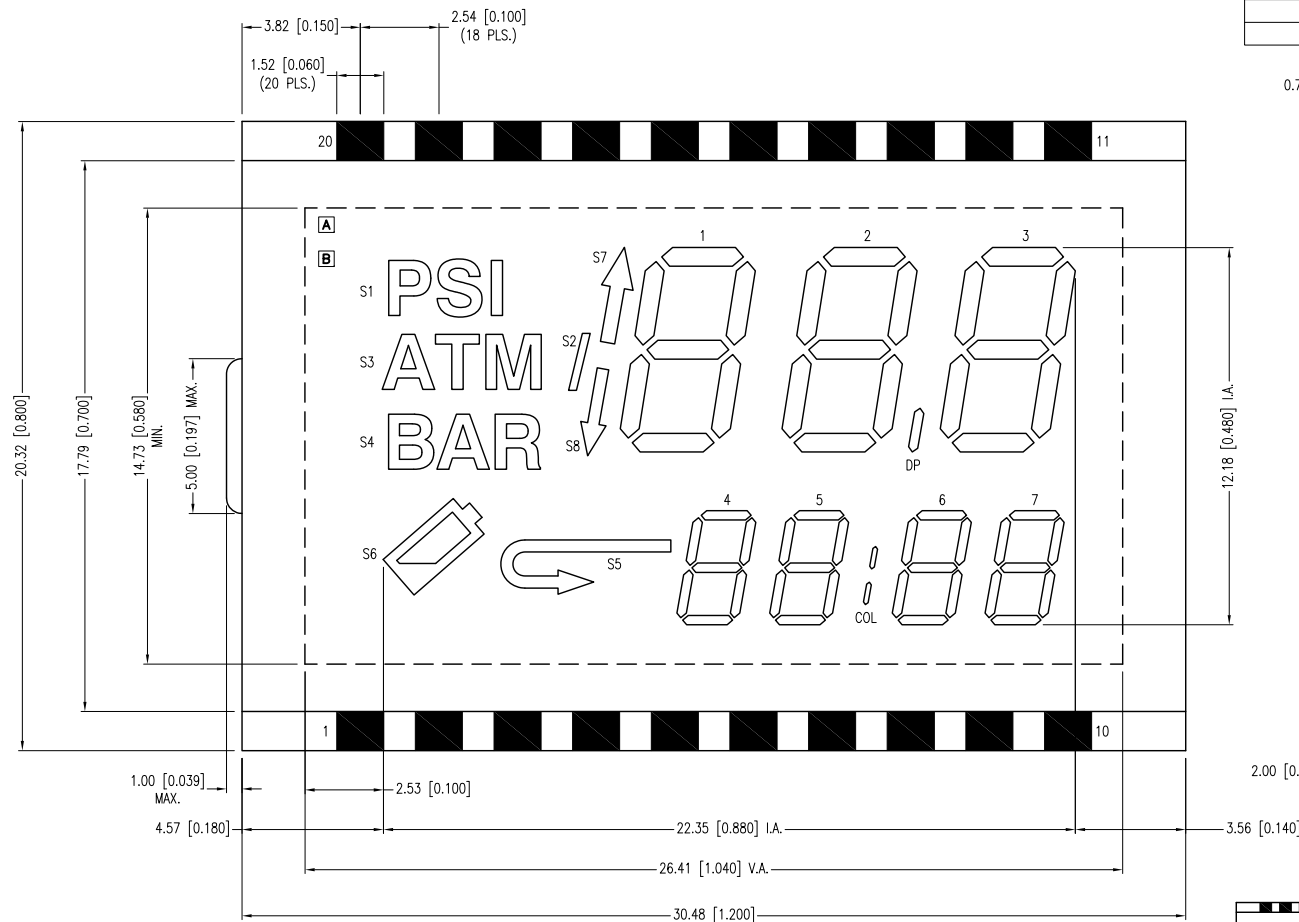

CHARACTERISTICS	
FLUID TYPE	TN POSITIVE
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	3.0V A.C.
OPERATING TEMP.	0°C TO +50°C
STORAGE TEMP.	-20°C TO +70°C
DRIVE METHOD	1/4 DUTY, 1/3 BIAS
CONNECTION	NO PIN

E NOTES:

1. NO PROTECTIVE FILM ON EITHER SIDE OF DISPLAYS. LUMEX WILL NOT BE RESPONSIBLE OR LIABLE FOR ANY SUPERFICIAL DAMAGE (I.E. SCRATCHES, DIRT, ETC.) TO THE FACE OF THE DISPLAYS DUE TO CUSTOMER MANDATED PROTECTIVE FILM REMOVAL.
2. DISPLAYS MUST BE PLACED INSIDE PLASTIC TRAY AND THEN INSIDE A PLASTIC BAG OR PLASTIC LINED CORRUGATE BOX.



ACTUAL SIZE

PIN #	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM0	4G	4C	5G	5C	6G	6C	7G	7C	-	-	COM0	-	3B	3G	2B	2G	1B	1G	S3	S7
COM1	4E	4D	5E	5D	6E	6D	7E	7D	-	-	-	COM1	3A	3F	2A	2F	1A	1F	S1	S5
COM2	4F	4B	5F	5B	6F	6B	7F	7B	COM2	-	-	-	3C	3E	2C	2E	1C	1E	S6	S4
COM3	-	4A	-	5A	COLON	6A	-	7A	-	COM3	-	-	3D	DP	2D	-	1D	-	S8	S2

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION







UNCONTROLLED DOCUMENT

0.26" 3 DGT CUSTOM LCD PNL, TN, TRANSFLECTIVE, NO PIN.


THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	06.30.11	DRAWN BY:	AB
PAGE:	1 OF 2	CHKD BY:	JD
SCALE:	NTS	APRVD BY:	JD
UNIT:	mm [INCH]		Ⓟ

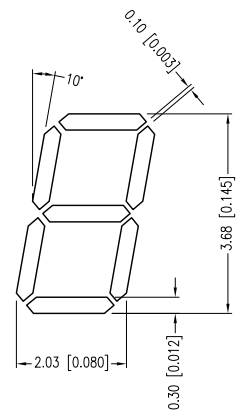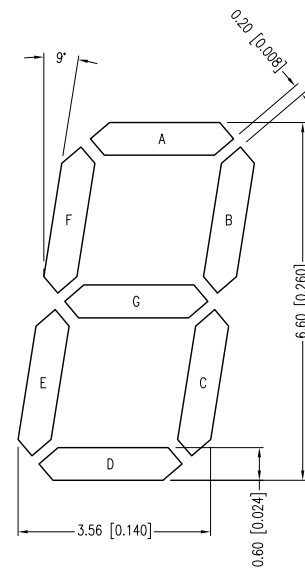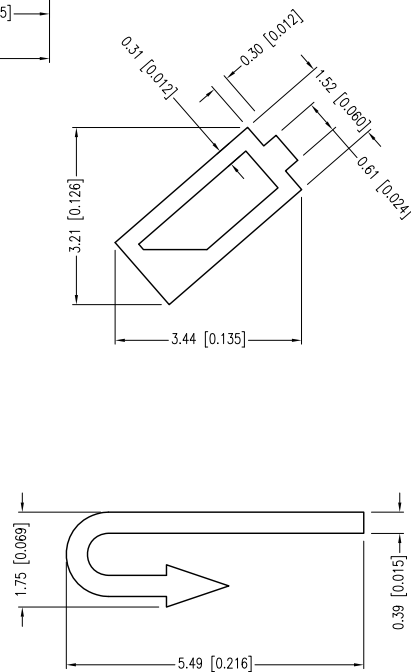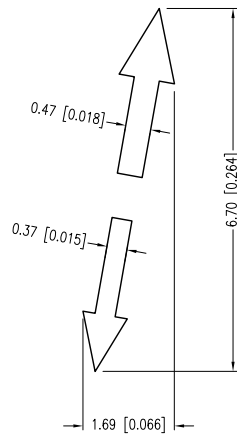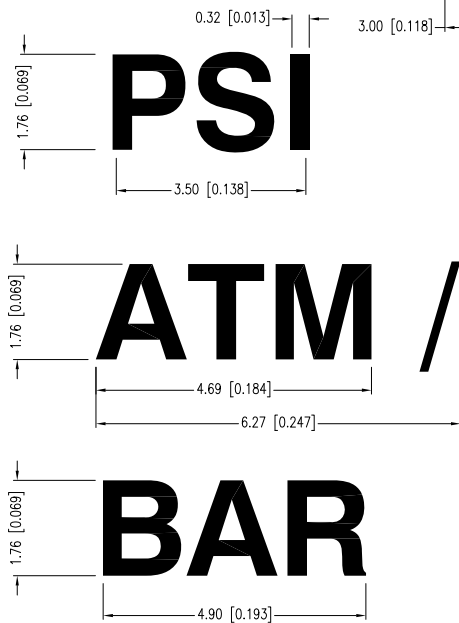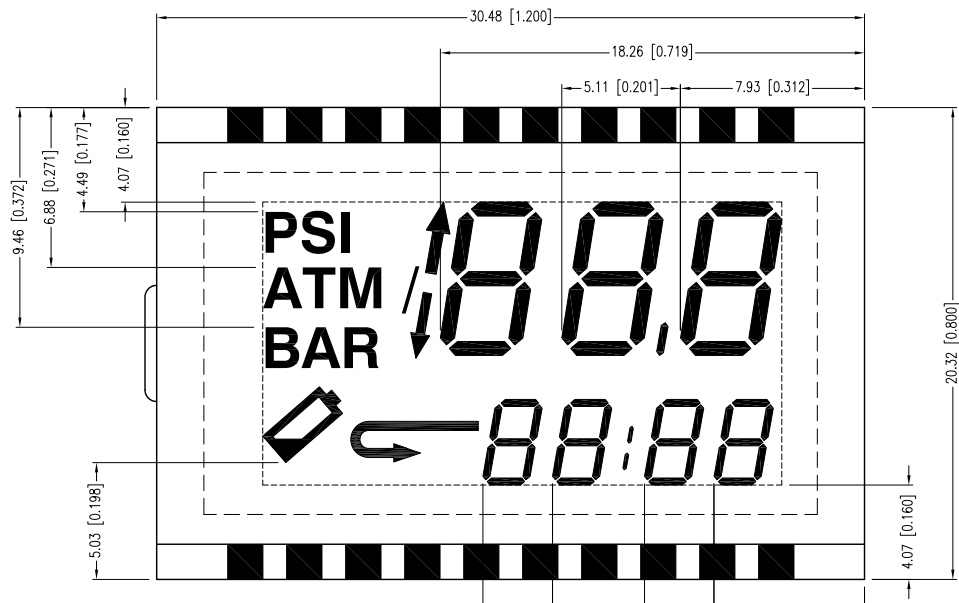

PART NUMBER	LCD-S301M26KF-D	REV.	E
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
08.25.09	E.C.N. #11583.		A
11.04.09	E.C.N. #11597.		B
12.22.09	E.C.N. #11605.		C
01.25.11	E.C.N. #11692.		D
06.30.11	E.C.N. #10BRDR. & REDRAWN/#11734.		E

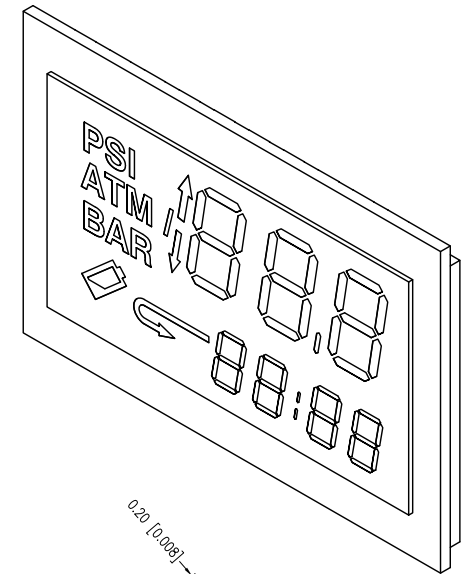

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

UNCONTROLLED DOCUMENT



425 N. GARY AVE.
CAROL STREAM, IL 60188-4900
PHONE: +1.800.278.5666
FAX: +1.630.315.2152
WEB: WWW.LUMEX.COM
MEMBER OF ITW PHOTONICS GROUP

0.26" 3 DGT CUSTOM LCD PNL, TN, TRANSLUCTIVE, NO PIN.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	06.30.11	DRAWN BY:	AB
PAGE:	2 OF 2	CHKD BY:	JD
SCALE:	NTS	APRVD BY:	JD
UNIT:	mm [INCH]		Ⓟ