
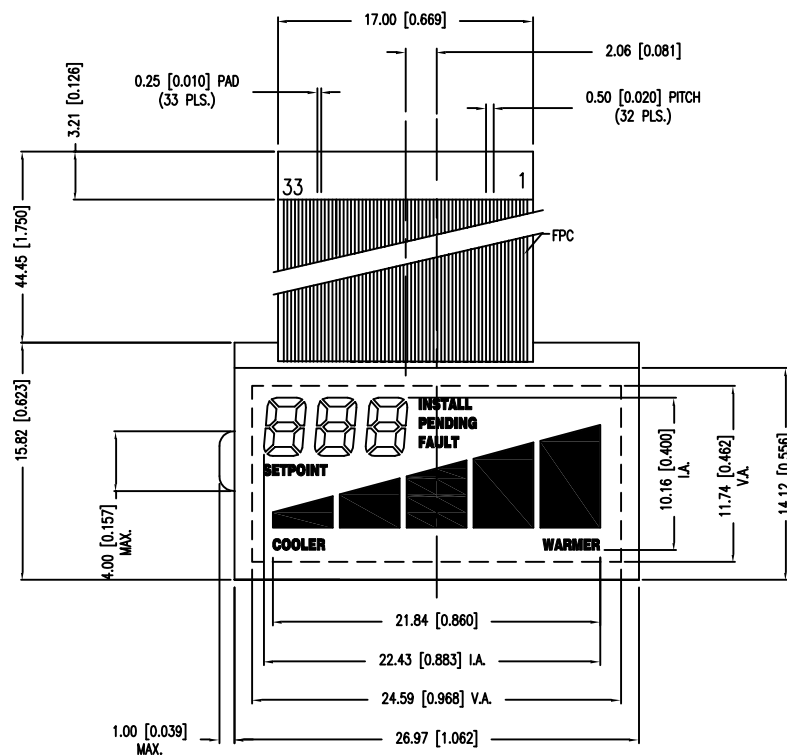



CHARACTERISTICS	
FLUID TYPE:	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	12:00
DISPLAY MODE:	REFLECTIVE
OPERATING VOLTAGE:	3.3V A.C.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHOD:	STATIC
CONNECTION TYPE:	FPC

PIN NO.	1	2	3	4	5	6	7	8	9	10	11
SEGMENT	COM	S5	S4	S3	S2	S1	FAULT	PENDING	INSTALL	C3	B3
PIN NO.	12	13	14	15	16	17	18	19	20	21	22
SEGMENT	A3	F3	G3	E3	D3	C2	B2	A2	F2	G2	E2
PIN NO.	23	24	25	26	27	28	29	30	31	32	33
SEGMENT	D2	C1	B1	A1	F1	G1	E1	D1	S7	S6	COM

NOTES:

- COOLER AND WARMER ARE ONE SEGMENT.
- TEXT HEIGHT = 0.75mm

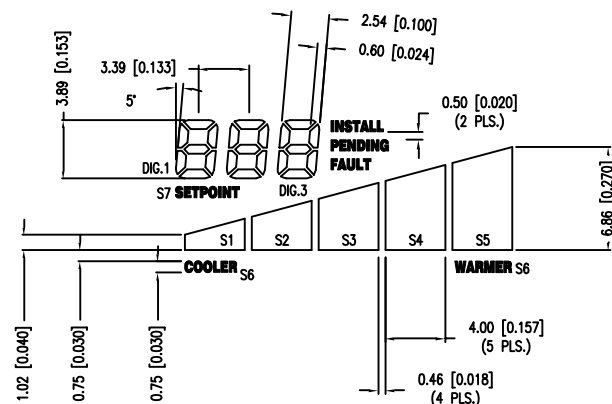

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION

LUMEX
Creating LED and LCD Solutions Together™

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

3 DIGIT CUSTOM LCD PANEL, TN, REFLECTIVE, WITH FPC

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 08.03.10 DRAWN BY: AB
PAGE: 1 OF 1 CHKD BY: KF
SCALE: N/A APRVD BY: -
UNIT: mm [INCH]

