



UNCONTROLLED DOCUMENT

PART NUMBER
LCD-S301M58TRREV.
A


REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	02.08.07

DETAIL ICON VIEW

ICON LINE THICKNESS: 0.30mm

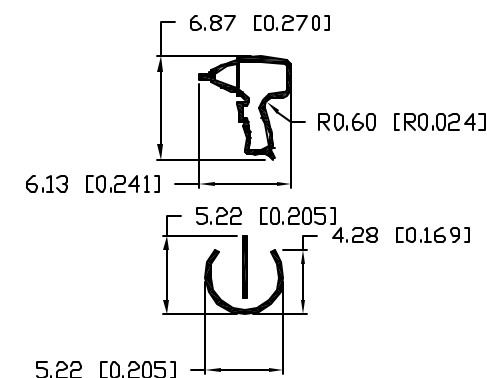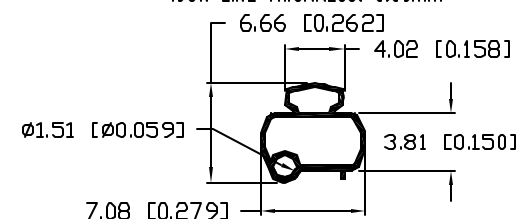

DIGIT DETAIL



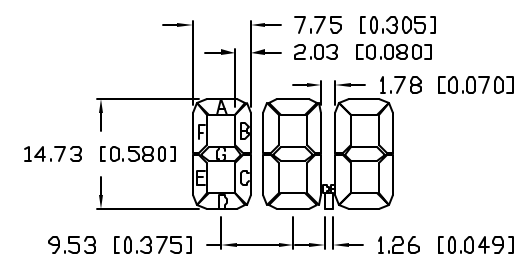


CHARACTERISTICS

FLUID TYPE	TN
BACKGROUND COLOR	GREY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHOD	1/2 DUTY, 1/2 BIAS
CONNECTION TYPE	16

PIN NO.	1	2	3	4	5	6	7	8
COM1	COM1	/	1E	1D	1C	2E	2D	2C
COM2	/	COM2	1F	1G	1B	2F	2G	2B
PIN NO.	9	10	11	12	13	14	15	16
COM1	DP	3E	3D	3C	T3	T2	T1	/
COM2	/	3F	3G	3B	3A	2A	1A	/

VIEW AREA DETAIL

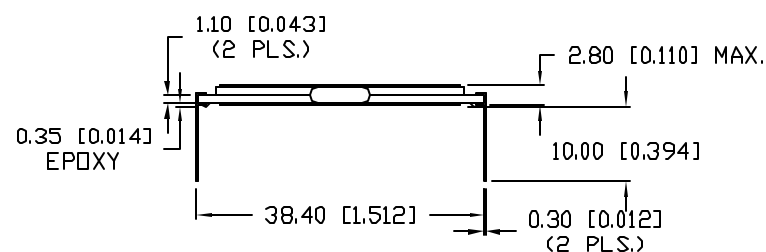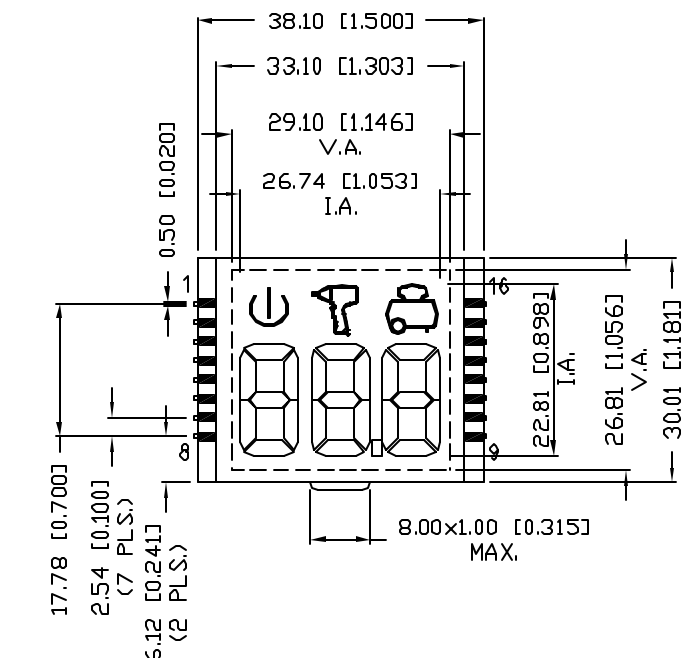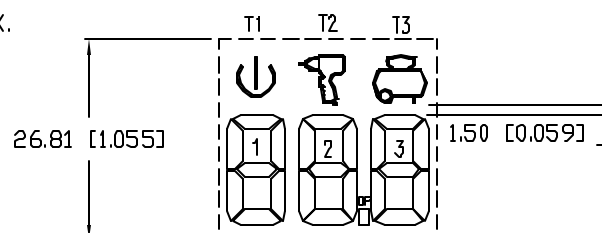

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=+DECIMAL PRECISION -0.00, MAX.=+0.00 -DECIMAL PRECISION

REV.
APART NUMBER
LCD-S301M58TR

3 DIGIT CUSTOM LCD PANEL, TN, REFLECTIVE,
1/2 DUTY, 1/2 BIAS, 5V, 16 PINS, 6:00 VIEW.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 11.15.04

PAGE: 1 OF 1

SCALE: N/A