



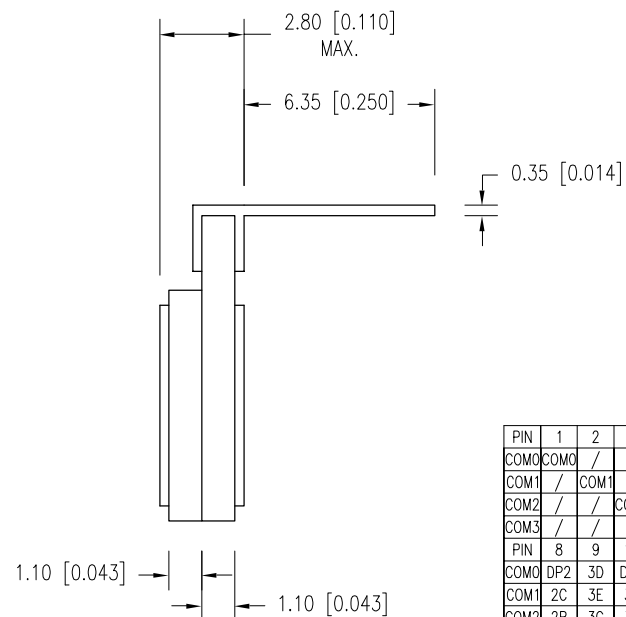

PIN	1	2	3	4	5	6	7
COM0	COM0	/	/	/	1D	DP1	2
COM1	/	COM1	/	/	1E	1C	2
COM2	/	/	COM2	/	1G	1B	2
COM3	/	/	/	COM3	1F	1A	2
PIN	8	9	10	11	12	13	
COM0	DP2	3D	DP3	4D	M	PH	
COM1	2C	3E	3C	4E	4C	FT	
COM2	2B	3F	3B	4E	4B	KPH	
COM3	2A	3G	3A	4F	4A	/	

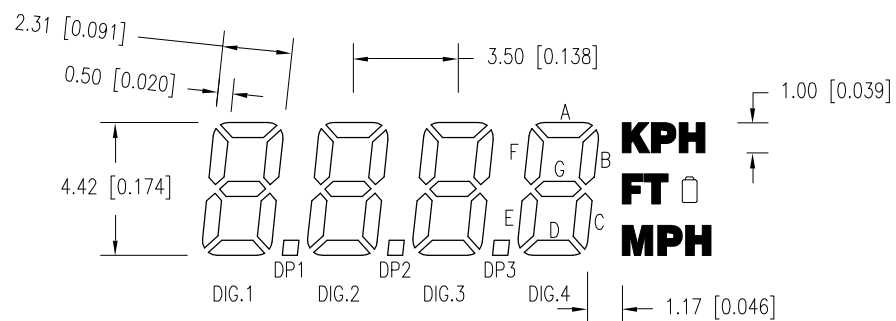

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	3.0V A.C.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHOD	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE	13 PINS

DATE:	06.16.10	DRAWN BY:	MP
PAGE:	1 OF 1	CHKD BY:	KF
SCALE:	N/A	APRVD BY:	BC
UNIT:	mm [INCH]		