

**RPM 12**

H1 H2

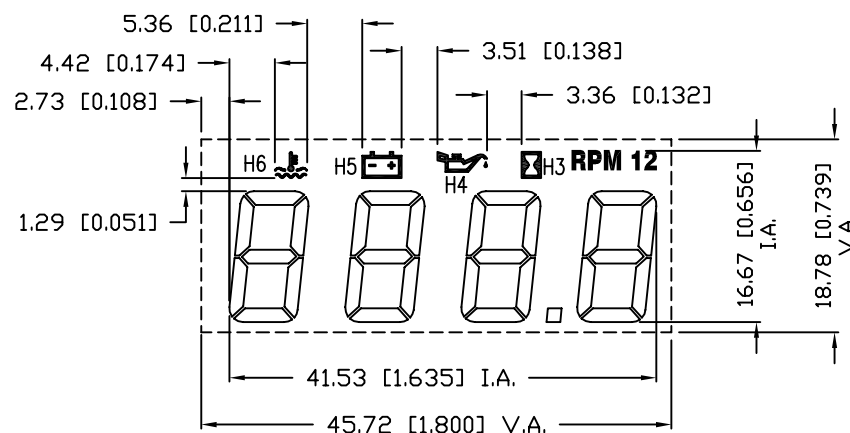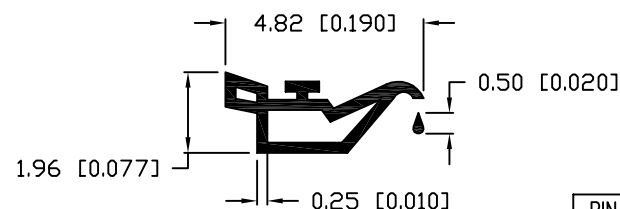

PIN NO.	1	2	3	4	5	6	7	8	9	10
COM1	1F	1A	H6	2F	2A	H5	3F	3A	/	4F
COM2	1E	1G	1B	2E	2G	2B	3E	3G	3B	4E
COM3	/	1D	1C	/	2D	2C	/	3D	3C	/
PIN NO.	11	12	13	14	15	16	17	18	19	20
COM1	H2	RPM	4A	H3	/	/	/	COM1	/	/
COM2	4B	H1	4G	H4	/	/	/	/	COM2	/
COM3	4C	/	4D	DP	/	/	/	/	/	COM3

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

UNCONTROLLED DOCUMENT

REV.

PART NUMBER

LCD-S401M49TF-1

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 8.7.02

SA/BC

YA

YA

PAGE: 2 OF 2

SCALE: N/A

0.50" DIGIT HEIGHT, CUSTOM LCD PANEL, TN,

TRANSFLECTIVE, 12:00, 20 PINS, 1/3 DUTY, 1/3 BIAS.