



SEGMENT

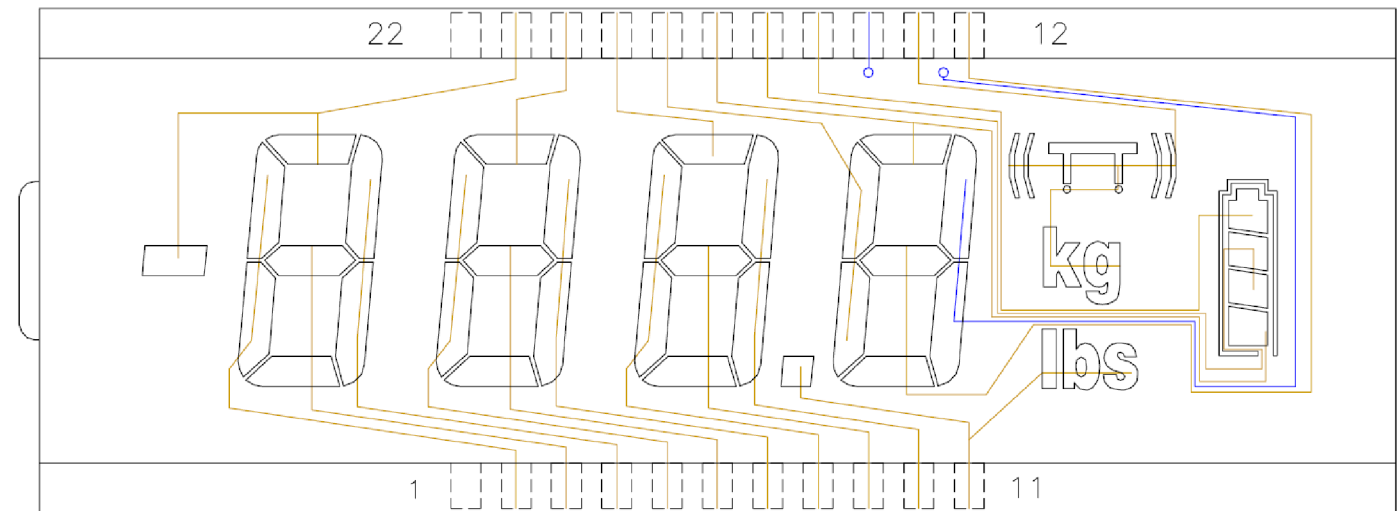

COMMON

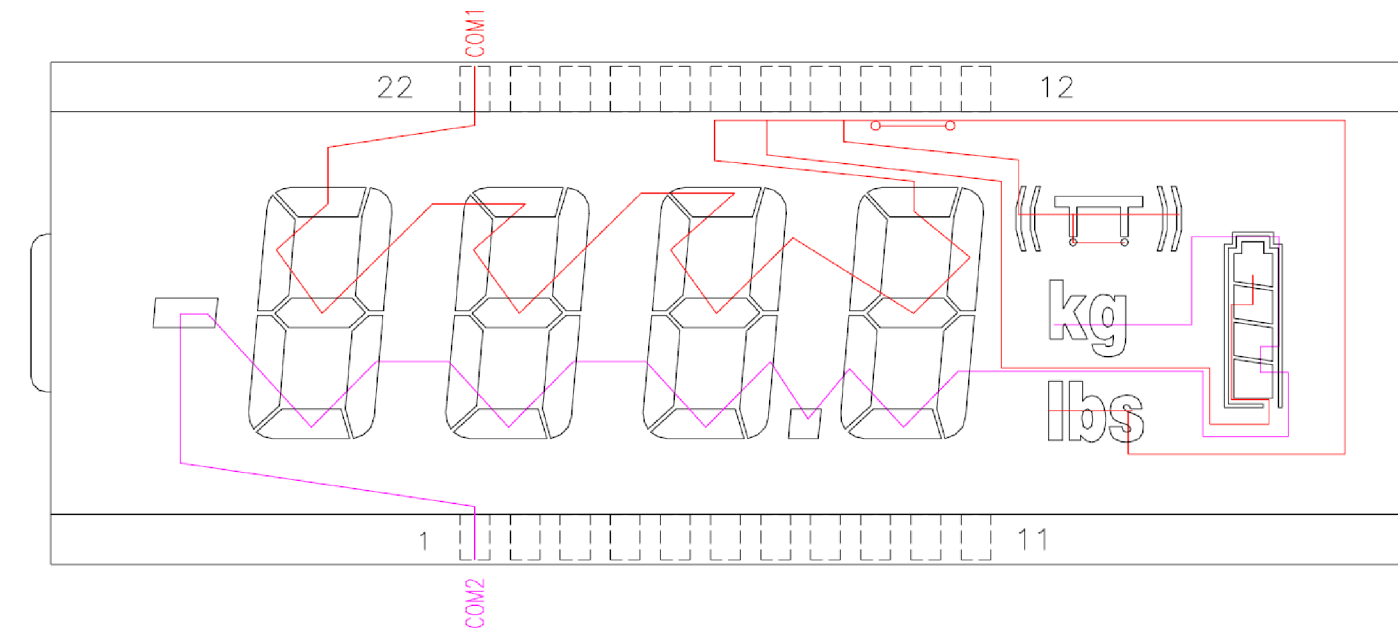

PIN NO.	1	2	3	4	5	6	7	8	9	10	11
COM1	/	1F	1G	1B	2F	2G	2B	3F	3G	3B	lbs
COM2	COM2	1E	1D	1C	2E	2D	2C	3E	3D	3C	DP
PIN NO.	12	13	14	15	16	17	18	19	20	21	22
COM1	4G	((TT))	4B	T4	T3	4A	4F	3A	2A	1A	COM1
COM2	4D	kg	4C	T5	T2	T1	4E	/	/	-	/

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+DECIMAL PRECISION}_{-0.00} MAX.= ^{+0.00}_{-DECIMAL PRECISION}