




CHARACTERISTICS

FLUID TYPE	STN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	12:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	3.0V A.C.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-10°C TO 60°C
DRIVING METHOD	1/8 DUTY, 1/4 BIAS
CONNECTION TYPE	ELASTOMER

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00, MAX.= +0.00 -DECIMAL PRECISION

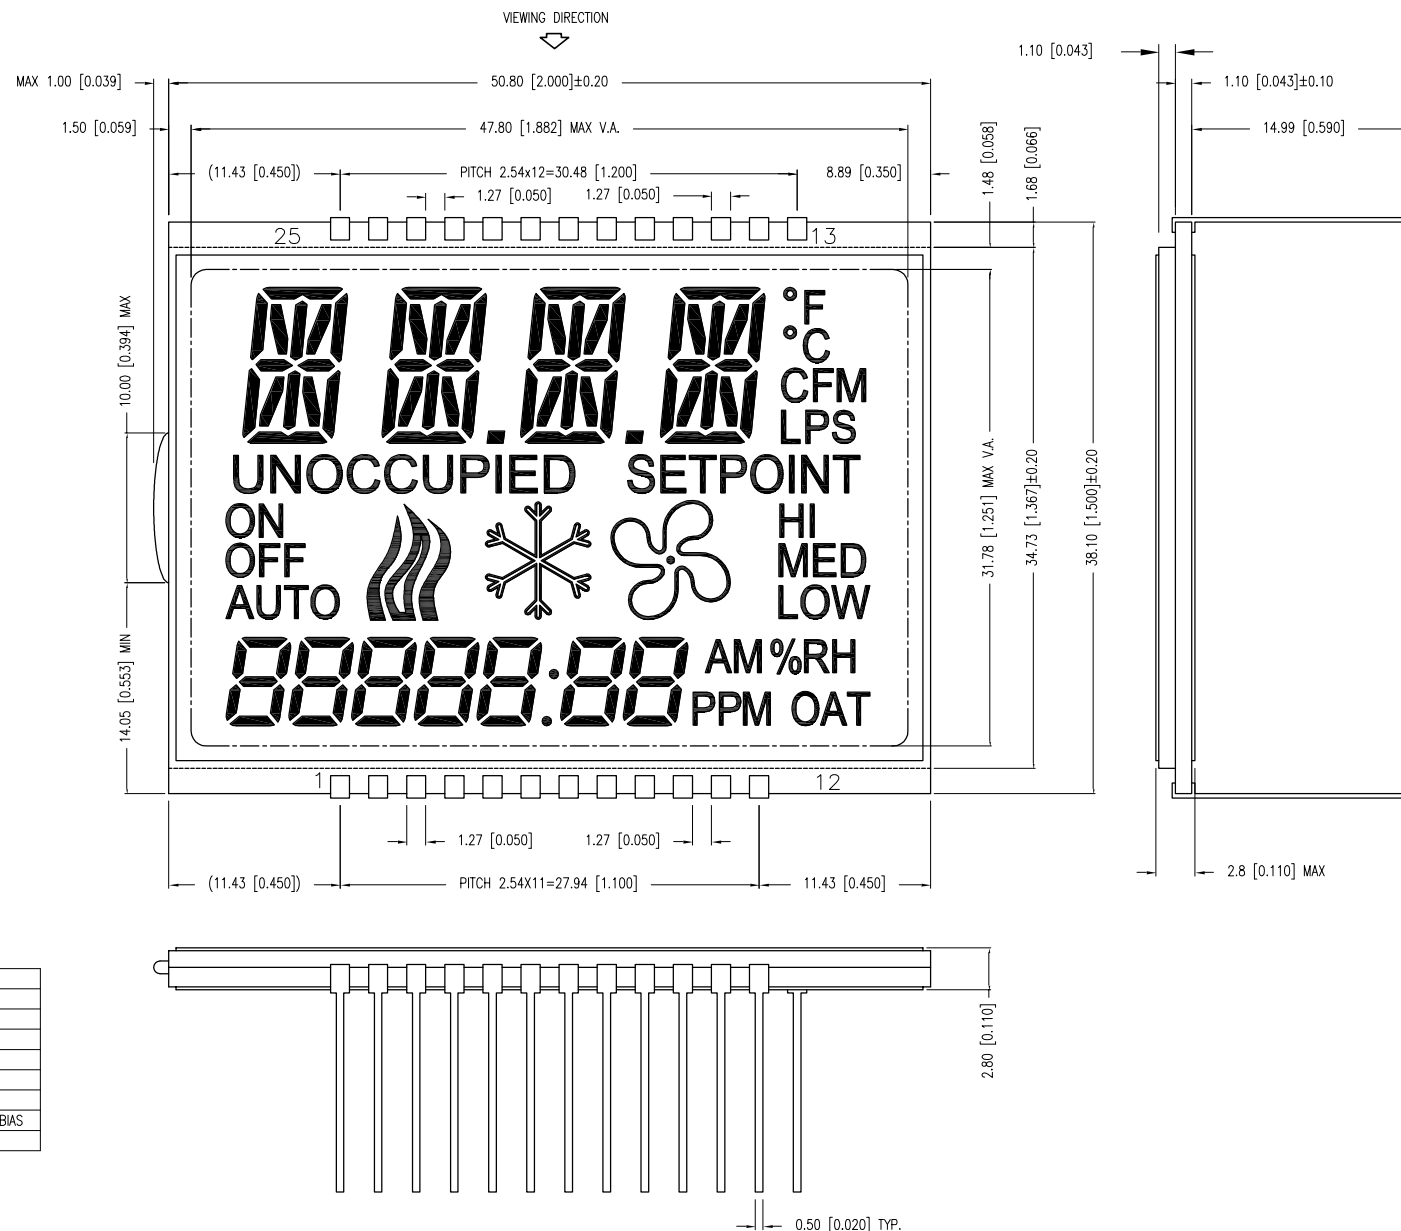

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

CUSTOM LCD PANEL, STN, 1/8 DUTY, REFLECTIVE, 0.590" PINS.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	09.20.10	DRAWN BY:	AB
PAGE:	1 OF 2	CHKD BY:	YA
SCALE:	N/A	APRVD BY:	BC
UNIT:	mm [INCH]		(P)

UNCONTROLLED DOCUMENT



DATE: 09.20.10	DRAWN BY: AB
PAGE: 2 OF 2	CHKD BY: YA
SCALE: N/A	APRVD BY: BC
UNIT: mm [INCH]	(Pb)