




CHARACTERISTICS

FLUID TYPE	STN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	12:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	3.0V A.C.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-10°C TO 60°C
DRIVING METHOD	1/8 DUTY, 1/4 BIAS
CONNECTION TYPE	ELASTOMER

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00, MAX.= +0.00 -DECIMAL PRECISION

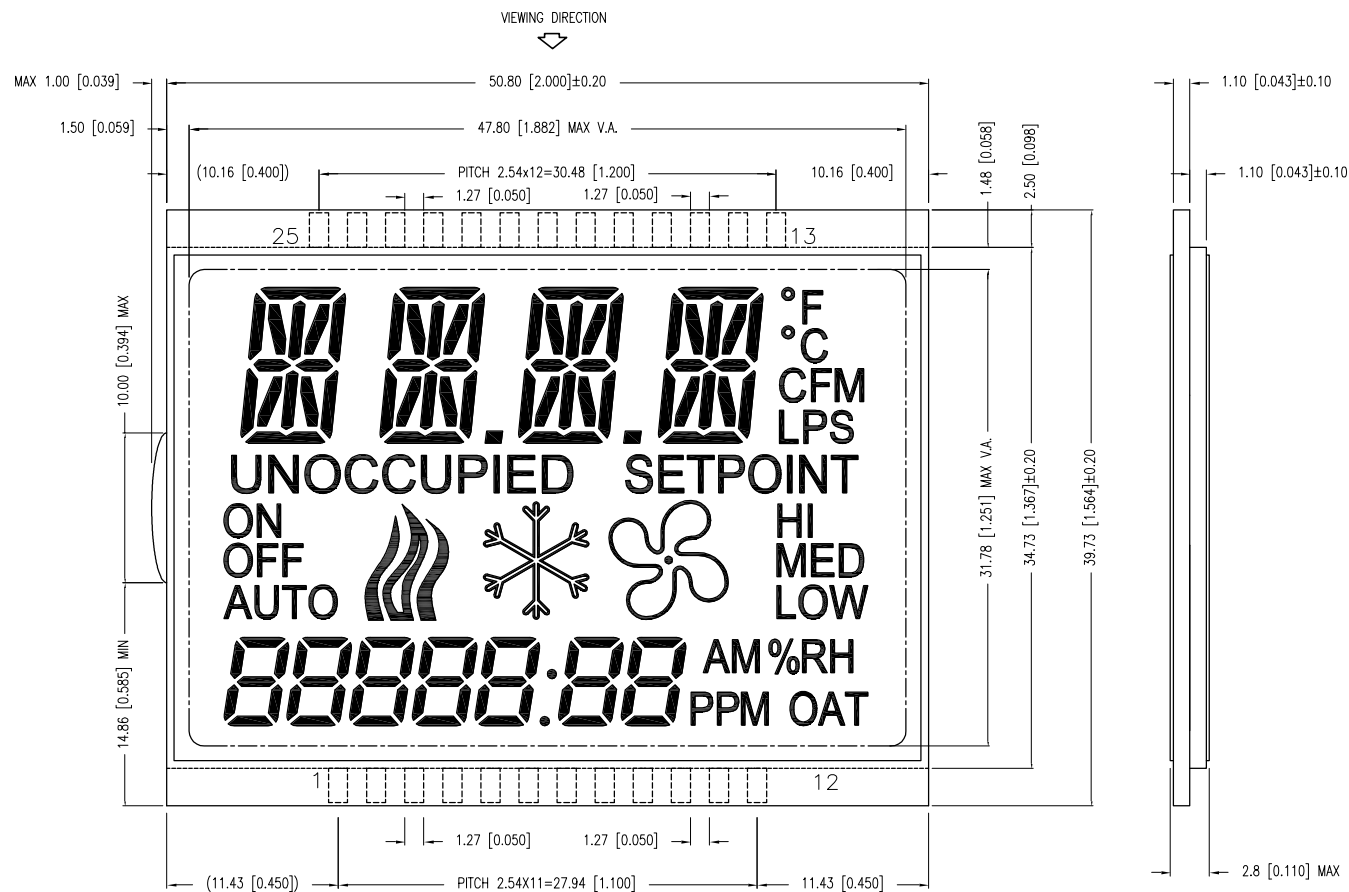

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM



CUSTOM LCD PANEL, STN, 1/8 DUTY, REFLECTIVE.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 09.20.10	DRAWN BY: AB
PAGE: 1 OF 2	CHKD BY: YA
SCALE: N/A	APRVD BY: BC
UNIT: mm [INCH]	(P)

UNCONTROLLED DOCUMENT

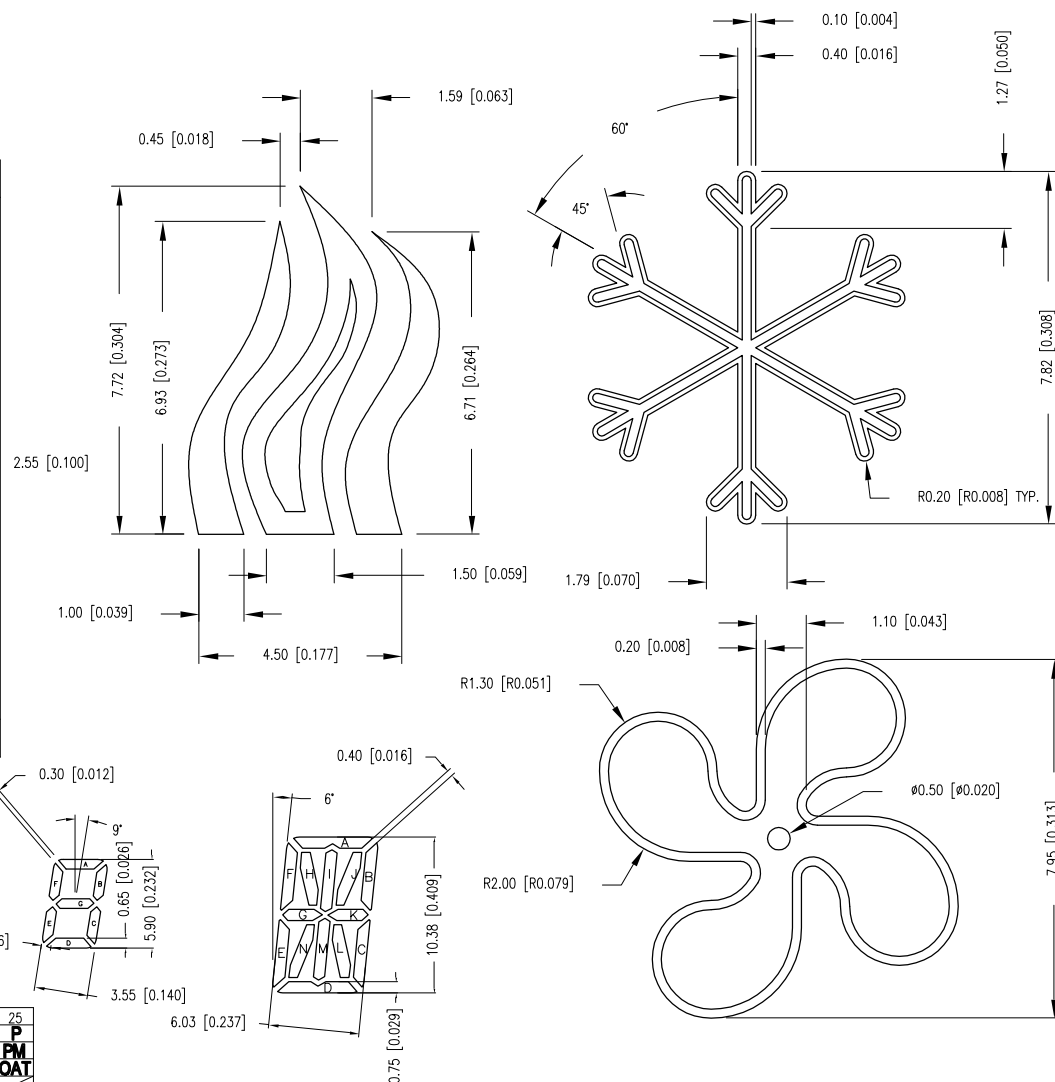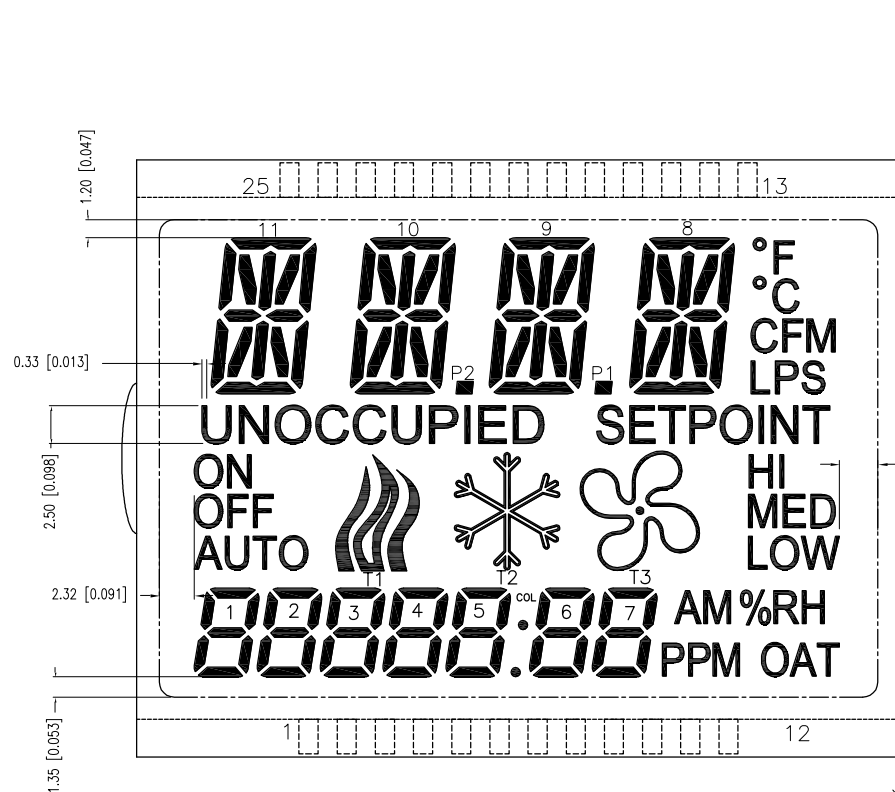

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
COM1	COM1								1D	2D	3D	4D	5D	6D	7D	8B	8A	9B	9A	10B	10A	11B	11A		P
COM2		COM2							1C	2C	3C	4C	5C	6C	7C	AM	8J	8H	9J	9H	10J	10H	11J	11H	PM
COM3			COM3						1E	2E	3E	4E	5E	6E	7E	%RH	8I	8F	9I	9F	10I	10F	11I	11F	OAT
COM4				COM4					1G	2G	3G	4G	5G	6G	7G	LOW	8K	8G	9K	9G	10K	10G	11K	11G	
COM5					COM5				1B	2B	3B	4B	5B	6B	7B	MED	8L	8M	9L	9M	10L	10M	11L	11M	
COM6						COM6			1F	2F	3F	4F	5F	6F	7F	HI	8C	8N	9C	9N	10C	10N	11C	11N	
COM7							COM7		1A	2A	3A	4A	5A	6A	7A		8D	8E	9D	9E	10D	10E	11D	11E	
COM8								COM8	AUTO	OFF	ON	T1	T2	COL	T3		°F	°C	P1	CFM	P2	LPS	REPORT	UNOCCUPIED	

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

CUSTOM LCD PANEL, STN, 1/8 DUTY, REFLECTIVE.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 09.20.10	DRAWN BY: AB
PAGE: 2 OF 2	CHKD BY: YA
SCALE: N/A	APRVD BY: BC
UNIT: mm [INCH]	(P)

UNCONTROLLED DOCUMENT