



PART NUMBER		REV.
LCD-S40C401-SR		A
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	4.17.07

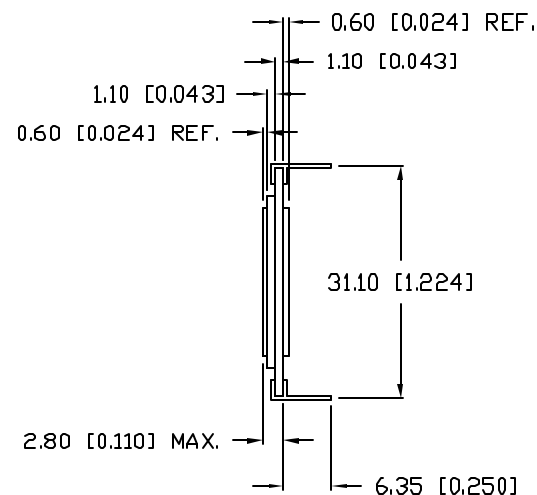

PIN	1	2	3	4	5	6	7	8	9
COM1	ON	PUMP	1A	CYCLE	2A	LINK	3A	LAP	4A
COM2	OFF	1F	1B	2F	2B	3F	3B	4F	4B
COM3	RUN	1E	1G	2E	2G	3E	3G	4E	4G
COM4		1D	1C	2D	2C	3D	3C	4D	4C
PIN	10	11	12	13	14	15	16	17	
COM1	HR				COM1				
COM2	MIN			COM2					
COM3	SEC		COM3						
COM4	CNT	COM4							

DIPSPLAY TYPE:	STN/YELLOW/GREEN
VIEWING DIRECTION:	6:00
DISPLAY MODE:	REFLECTIVE
DRIVING METHODE:	1/4 DUTY, 1/3 BIAS
OPERATING VOLTAGE:	4.5 ~ 5.0 VDC
OPERATING TEMP.	-20°C TO 50°C
STORAGE TEMP.	-40°C TO 85°C

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+0.00
-0.00 MAX.=+0.00
-0.00

REV. A	PART NUMBER LCD-S40C401-SR	CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES. RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.		290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw
CUSTOM LCD GLASS, STN, REFLECTIVE.			DRAWN BY: JC	CHECKED BY: APPROVED BY: DATE: 12.8.97 PAGE: 1 OF 1 SCALE: N/A