



LCD-S560C308TF

PRELIMINARY IN P/N DIR

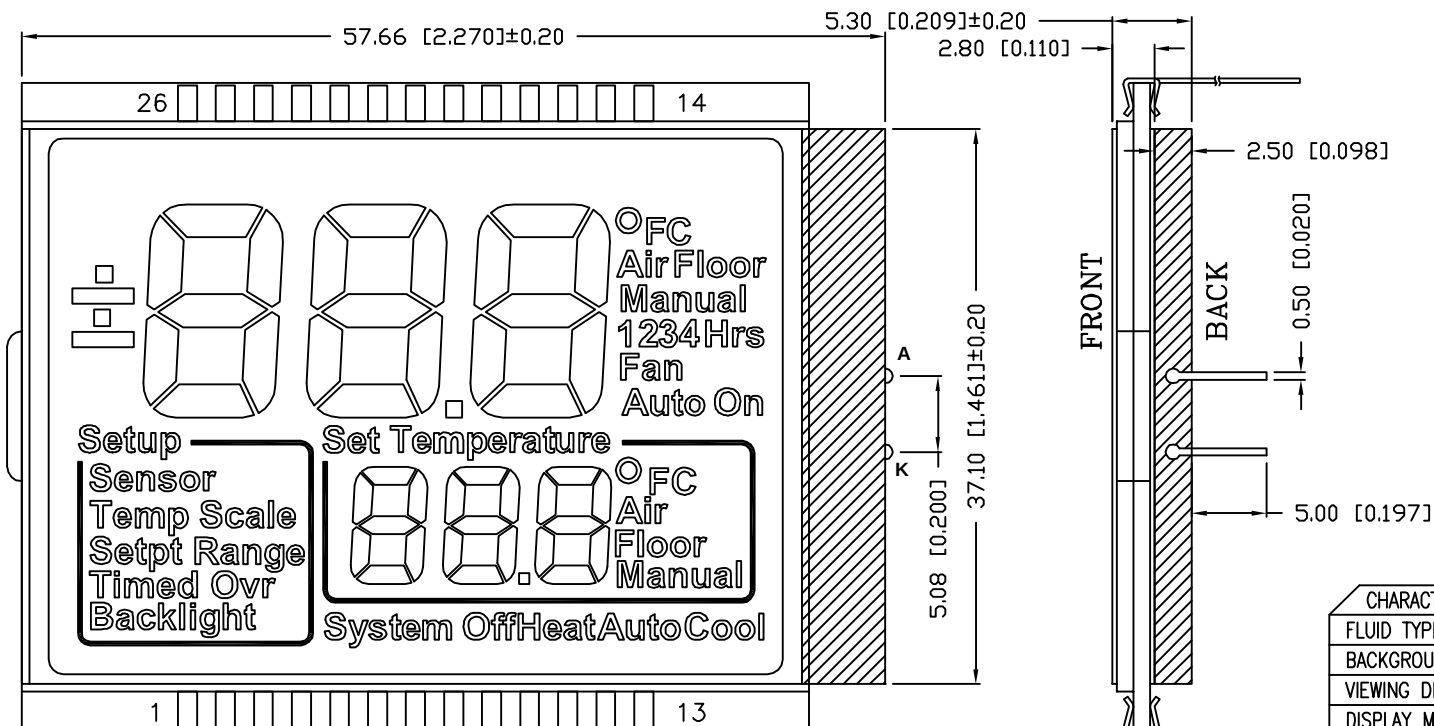

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	12:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	3.0V A.C.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-20°C TO 60°C
DRIVING METHOD	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE	PIN

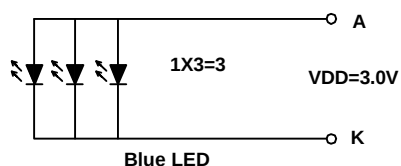

NOTES:

1. BLUE LED BACKLIGHT TO BE MOUNTED TO BACK OF LCD WITH DOUBLE SIDED TAPE.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+DECIMAL PRECISION MAX.=+0.00 -DECIMAL PRECISION

REV.

PART NUMBER

LCD-S560C308TF

CUSTOM LCD AND BACKLIGHT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
Creating LED and LCD Solutions Together™

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 12.02.09


JN

PAGE: 1 OF 2

SCALE: N/A

LCD-S560C308TF

PRELIMINARY IN P/N DIR

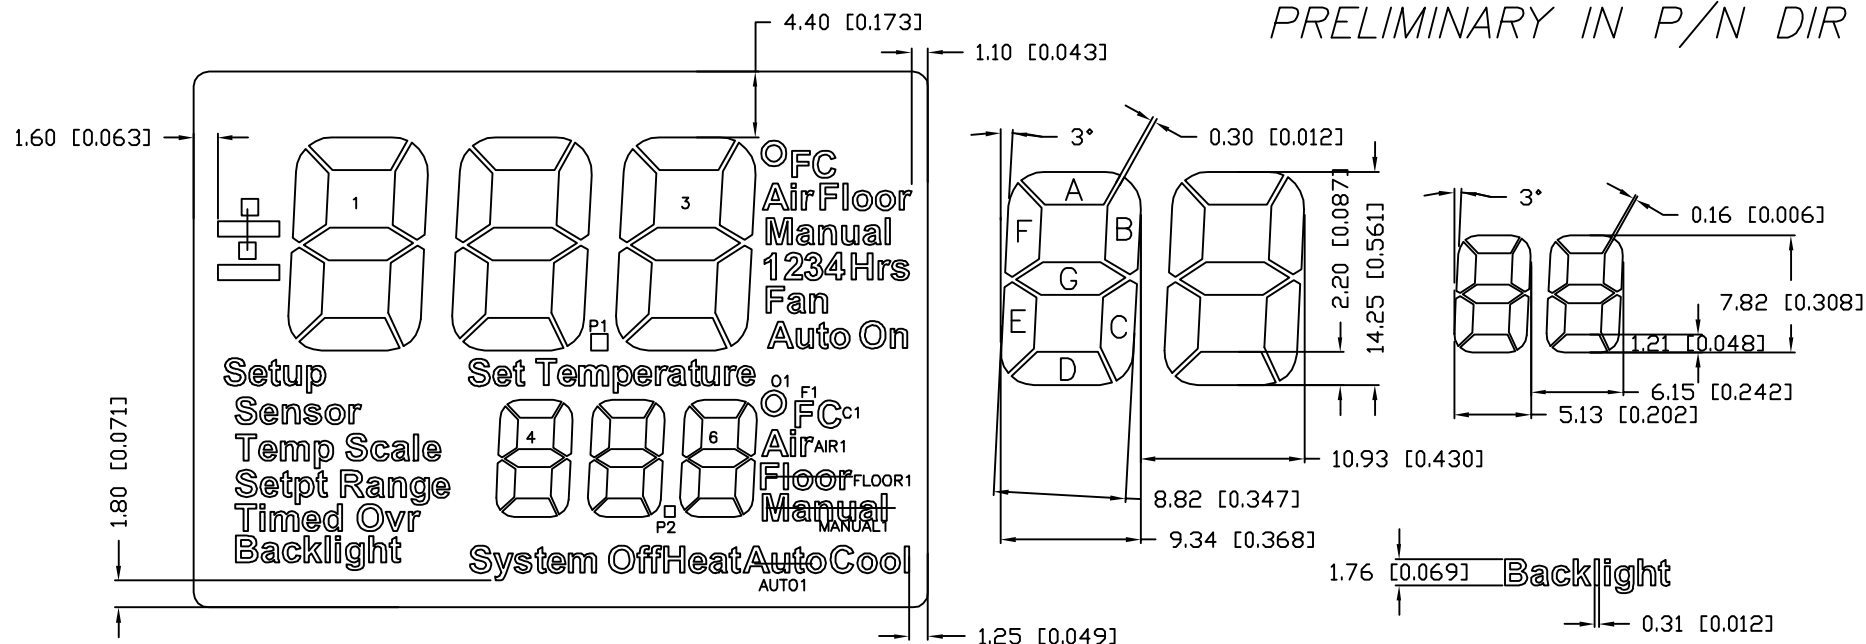

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
COM1	SetptRange	TimedOvr	--	--	Air1	⊙1	6A	6F	5A	5F	4A	4F	Hrs	4	Floor	⊙
COM2	TempScale	Backlight	--	--	Floor1	F1	6B	6G	5B	5G	4B	4G	On	3	Air	F
COM3	Sensor	Setup	System	Heat	Manual1	⊙1	6C	6E	5C	5E	4C	4E	Auto	2	Manual	⊙
COM4	--	--	Off	AUTO1	Cool	--	6D	P2	5D	--	4D	SetTemperature	Fan	1	--	--

PIN	17	18	19	20	21	22	23	24	25	26
COM1	3A	3F	2A	2F	1A	1F	COM1	--	--	--
COM2	3B	3G	2B	2G	1B	1G	--	COM2	--	--
COM3	3C	3E	2C	2E	1C	1E	--	--	COM3	--
COM4	3D	P1	2D	⊙	1D	⊙	--	--	--	COM4

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+DECIMAL PRECISION MAX.=+0.00 -DECIMAL PRECISION

REV.

PART NUMBER

LCD-S560C308TF

CUSTOM LCD AND BACKLIGHT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
Creating LED and LCD Solutions Together™

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JN

CHECKED BY:

APPROVED BY:

DATE: 12.02.09

PAGE: 2 OF 2

SCALE: N/A

Pb

UNCONTROLLED DOCUMENT