


CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	3.0~5.0V AC
OPERATING TEMP.	0°C TO +50°C
STORAGE TEMP.	-20°C TO +70°C
DRIVING METHOD	STATIC
CONNECTION TYPE	70 PINS



PIN COM	1 COM	2 6E	3 6D	4 6C	5 DP5	6 5E	7 5D	8 5C	9 DP4	10 4E	11 4D	12 /	13 /	14 /	15 /
PIN COM	16 4C	17 /	18 DP3	19 3E	20 3D	21 /	22 /	23 /	24 3C	25 /	26 DP2	27 2E	28 2D	29 /	30 /
PIN COM	31 2C	32 DP1	33 1E	34 1D	35 1C	36 1B	37 1A	38 1F	39 1G	40 2B	41 2A	42 2F	43 2G	44 COL1	45 /
PIN COM	46 3B	47 /	48 /	49 /	50 3A	51 3F	52 3C	53 /	54 /	55 4B	56 /	57 /	58 4A	59 4F	60 4G
PIN COM	61 COL2	62 5B	63 5A	64 5F	65 5C	66 3G	67 6B	68 6A	69 6F	70 COM					

UNCONTROLLED DOCUMENT

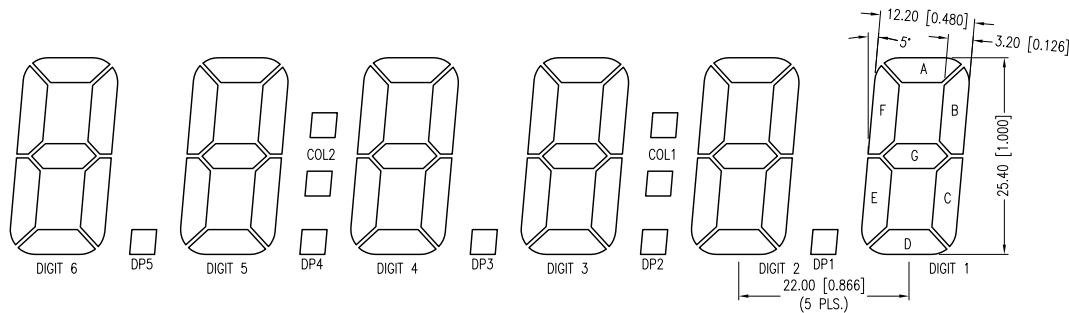

1.00" CHARACTER HEIGHT 6 DIGIT LCD DISPLAY, TN, REFLECTIVE, 70 PINS.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 08.27.12	DRAWN BY: AB
PAGE: 1 OF 1	CHKD BY: KF
SCALE: NTS	APRVD BY: KF
UNIT: mm [INCH]	(Pb)