



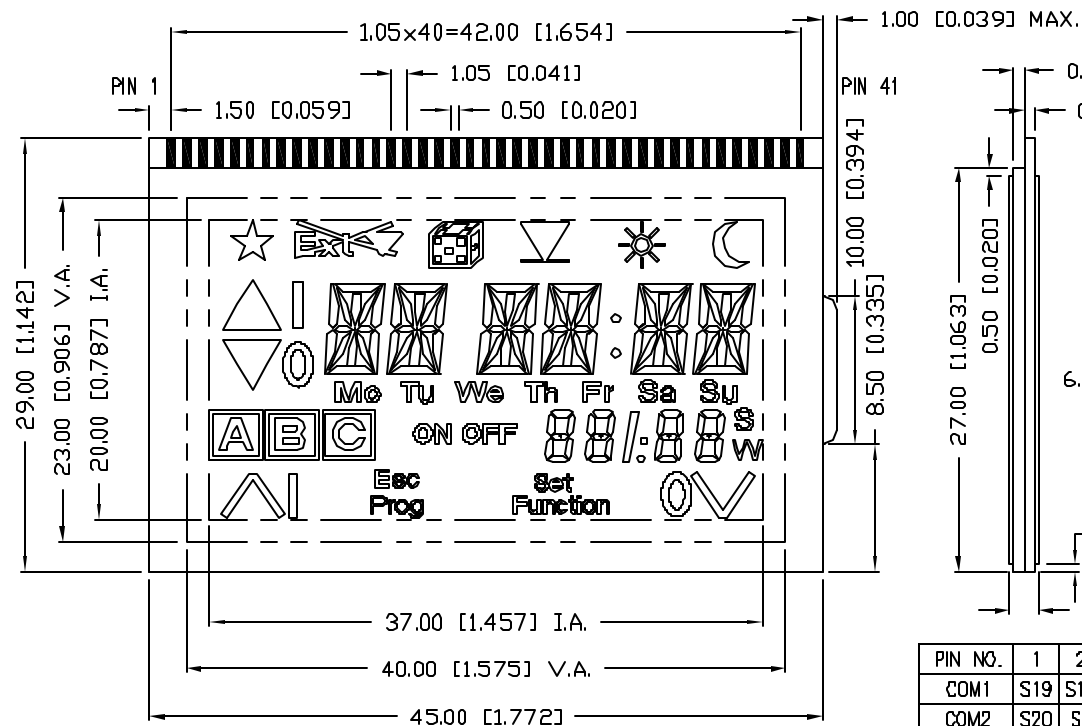

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	YELLOW-GREEN
VIEWING DIRECTION	12:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	3.0 V
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHOD	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE	NO PINS

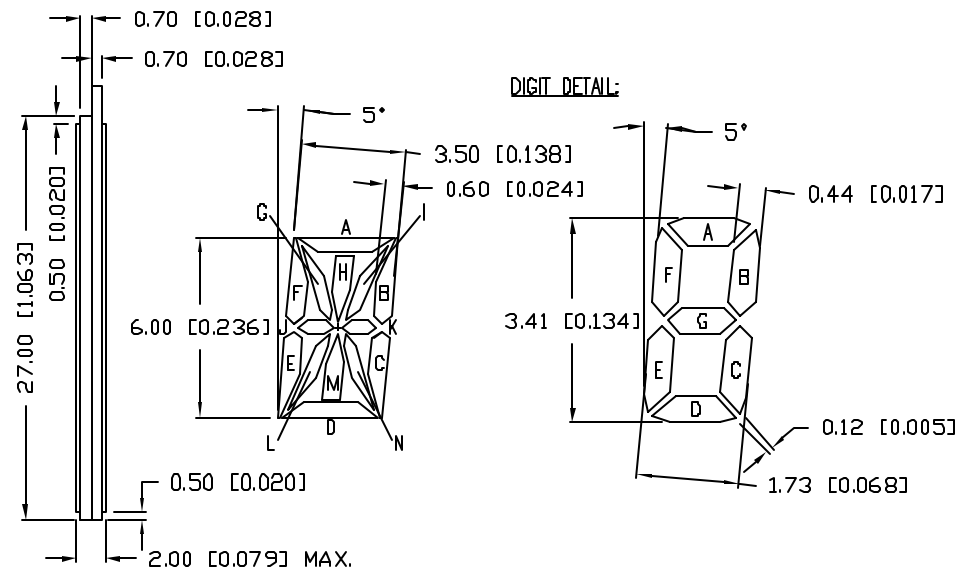

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
COM1	S19	S12	S11	1L	1D	1N	M0	2L	2D	2N	I	3L	3D	3N	Th	4L	4D	4N	DP4	5L	
COM2	S20	S9	S10	1E	1M	1K	1G	2E	2M	2K	2C	3E	3M	3K	3C	4E	4M	4K	4C	5E	
COM3	S21	Esc	S8	1F	1J	1H	1B	2F	2J	2H	2B	3F	3J	3H	3B	4F	4J	4H	4B	5F	
COM4	Q	S13	S7	S1	1G	1A	1I	S2	2G	2A	2I	S3	3G	3A	3I	S4	4G	4A	4I	S5	
PIN NO.	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
COM1	5D	5N	Su	6L	6D	6N	S	10A	10F	9A	9F	DP3	8A	8F	7A	7F	Tu	COM1	/	/	/
COM2	5M	5K	5C	6E	6M	6K	6C	10B	10G	9B	9G	Fr	8B	8G	7B	7G	We	/	COM2	/	/
COM3	5J	5H	5B	6F	6J	6H	6B	10C	10E	9C	9E	Sa	8C	8E	7C	7E	S14	/	/	COM3	/
COM4	5G	5A	5I	S6	6G	6A	6I	W	10D	S18	9D	S17	S16	8D	Set	7D	S15	/	/	/	COM4

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=+0.00 DECIMAL PRECISION MAX.=+0.00 DECIMAL PRECISION

REV.

PART NUMBER

LCD-S601M23TF-1D

45mm x 29mm LCD PANEL, POSITIVE MODE,
TN, TRANSFLECTIVE, 12:00 VIEW, NO PINS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JN

CHECKED BY:

APPROVED BY:

DATE: 05.07.08

PAGE: 1 OF 3

SCALE: N/A

REV.



REV.

PART NUMBER
LCD-S601M23TF-1D

45mm x 29mm LCD PANEL, POSITIVE MODE,
TN, TRANSFLECTIVE, 12:00 VIEW, NO PINS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.


RELIABILITY NOTE

**OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT
SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.**



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 05.07.08
JN			PAGE: 2 OF 3
			SCALE: N/A

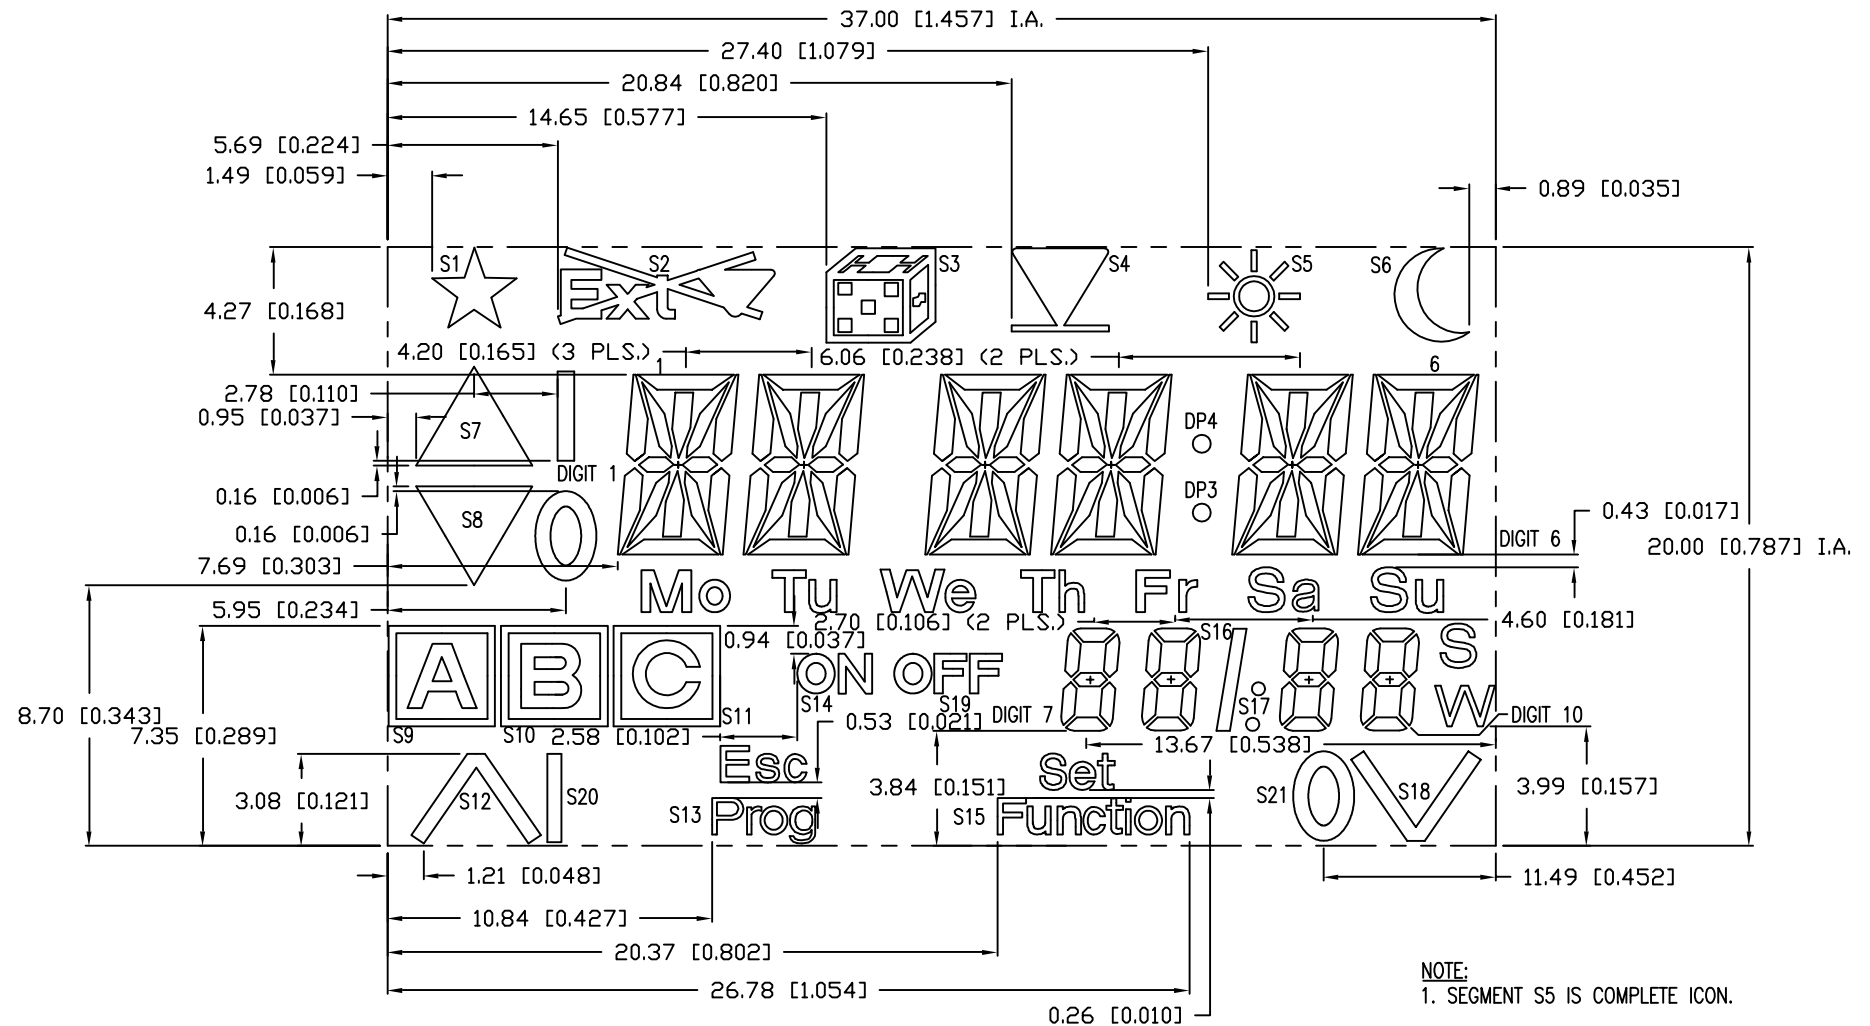

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX= +0.00 -DECIMAL PRECISION

REV.

PART NUMBER
LCD-S601M23TF-1D

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

45mm x 29mm LCD PANEL, POSITIVE MODE,
TN, TRANSFLECTIVE, 12:00 VIEW, NO PINS.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

DRAWN BY:

JN

CHECKED BY:

APPROVED BY:

DATE: 05.07.08

PAGE: 3 OF 3

SCALE: N/A