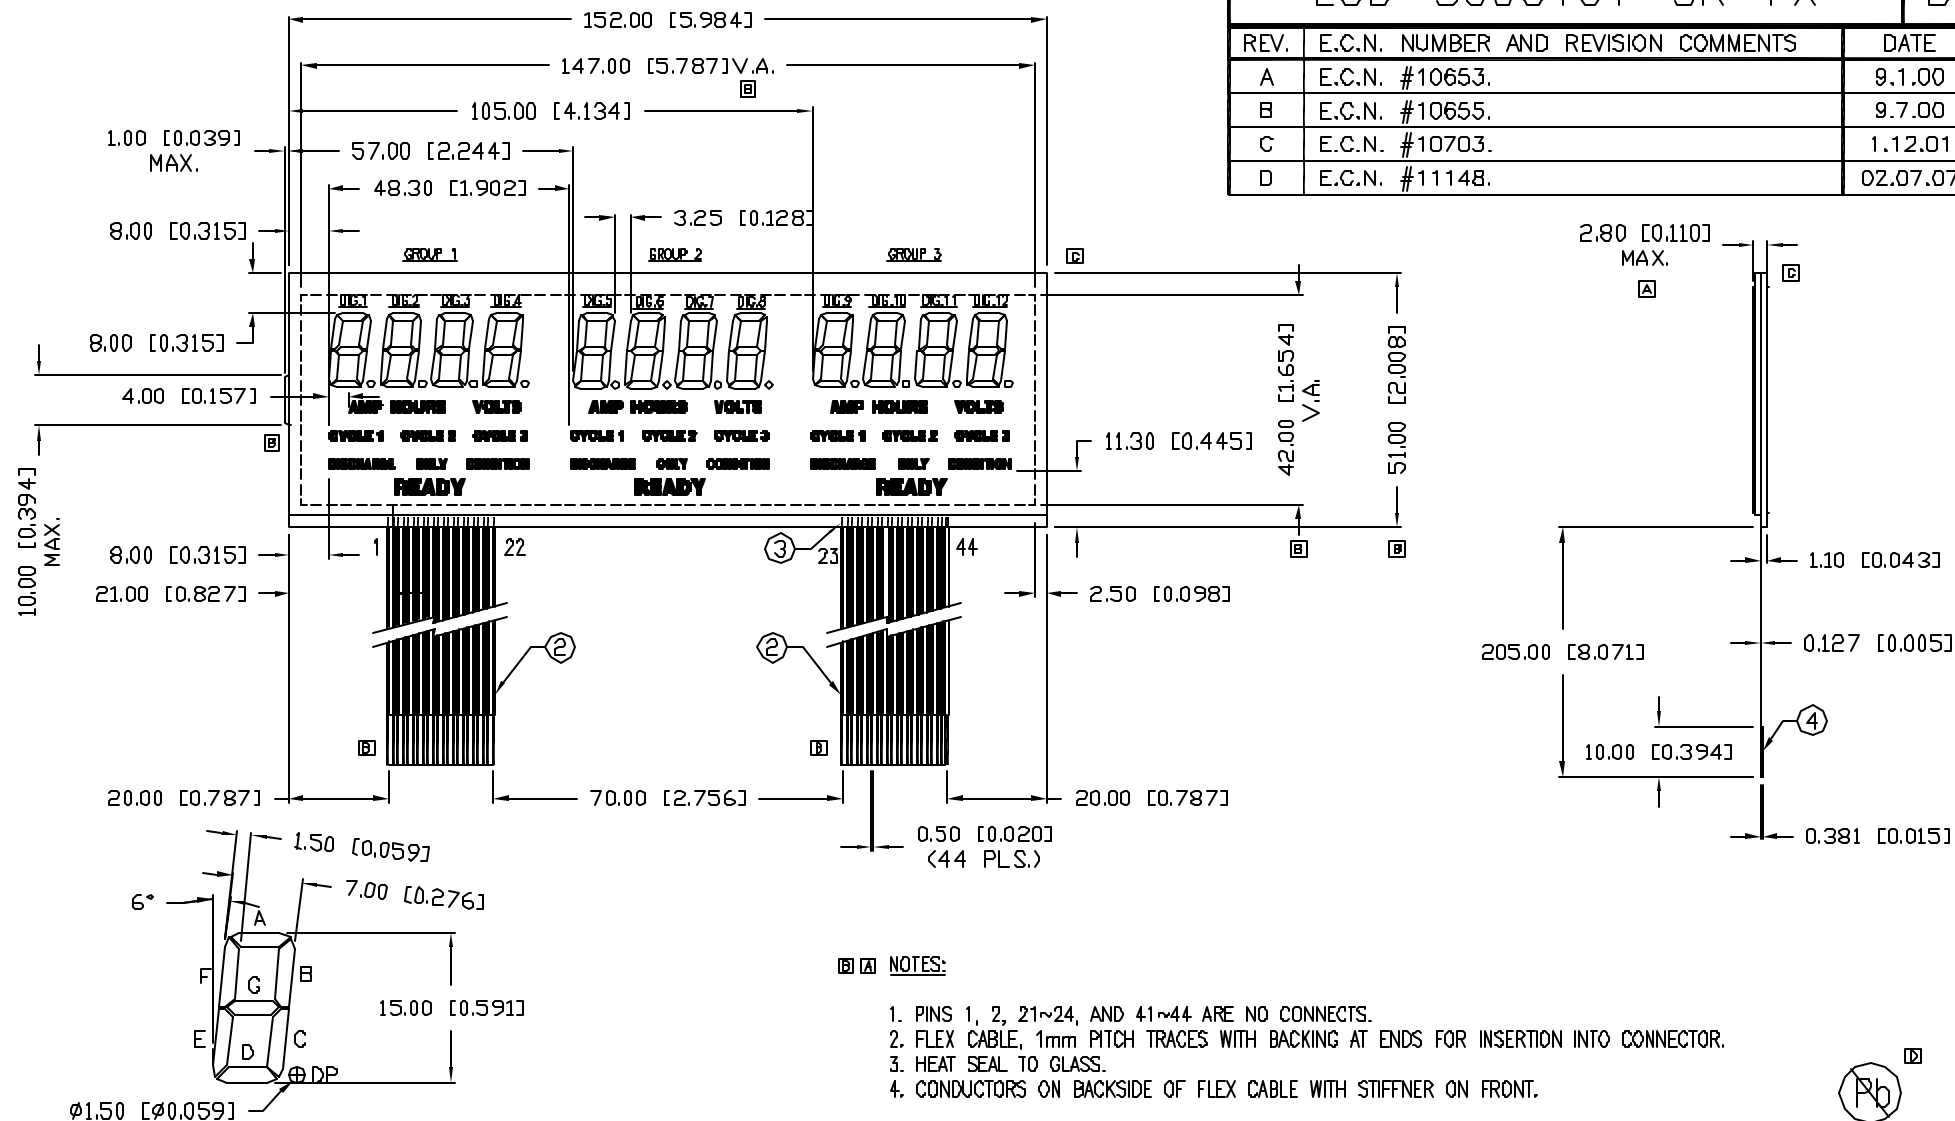


UNCONTROLLED DOCUMENT

PART NUMBER
LCD-S60C101-SR-FXREV.
D

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=+DECIMAL PRECISION MAX.=+0.00 -DECIMAL PRECISION

REV.

D

PART NUMBER

LCD-S60C101-SR-FX

152mm x 51mm LCD GLASS, 12 7-SEG., TN,
REFLECTIVE, WITH FLEX CABLE.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JC


CHECKED BY:

APPROVED BY:

DATE: 8.23.00

PAGE: 1 OF 2

SCALE: N/A

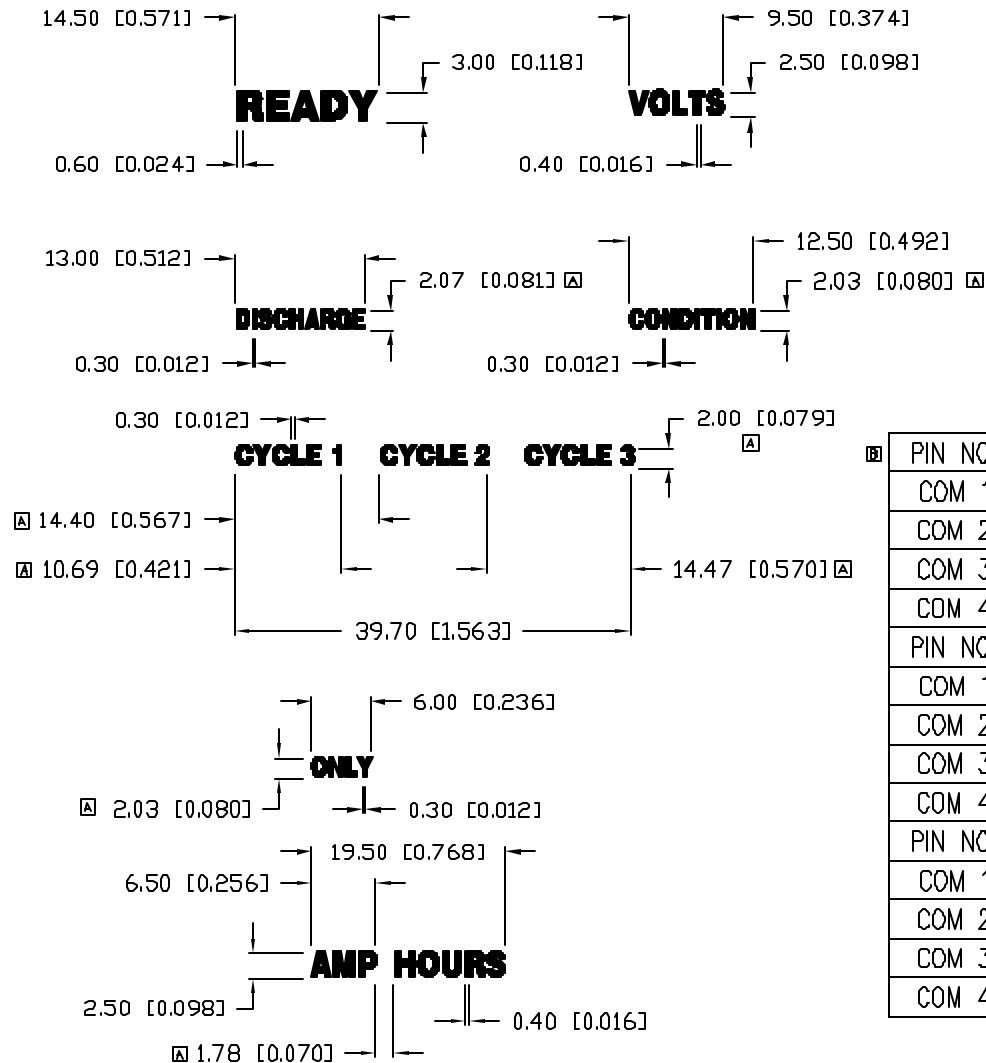

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHOD	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE	FLEX HEAT SEAL CABLE

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
COM 1	/	/	COM1	/	/	/	/	CYCLE1	DIS 1	B1	A2	B2	A3	B3	A4
COM 2	/	/	/	COM2	/	/	/	A1	CHGE 1	G1	F2	G2	F3	G3	F4
COM 3	/	/	/	/	COM3	/	/	DIS1 F1	ONLY 1	C1	E2	C2	E3	C3	E4
COM 4	/	/	/	/	/	COM4	/	READY 1	COND 1	AMP1/HRS1 DP1	D2	VOLTS1 DP2	D3	CYCLE2 1	D4
PIN NO.	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
COM 1	B4	/	CYCLE1 2	DIS 2	B5	/	/	/	/	A6	B6	A7	B7	A8	B8
COM 2	G4	/	A5	CHGE 2	G5	/	/	/	/	F6	G6	F7	G7	F8	G8
COM 3	C4	/	DIS1 F5	ONLY 2	C5	/	/	/	/	E6	C6	E7	C7	E8	C8
COM 4	CYCLE3 1	/	READY 2	COND 2	AMP2/HRS2 DP5	/	/	/	/	D6	VOLTS2 DP6	D7	CYCLE2 2	D8	CYCLE3 2
PIN NO.	31	32	33	34	35	36	37	38	39	40	41	42	43	44	
COM 1	/	CYCLE1 3	DIS 3	B9	A10	B10	A11	B11	A12	B12	/	/	/	/	
COM 2	/	A9	CHGE 3	G9	F10	G10	F11	G11	F12	G12	/	/	/	/	
COM 3	/	DIS1 F9	ONLY 3	C9	E10	C10	E11	C11	E12	C12	/	/	/	/	
COM 4	/	READY 3	COND 3	AMP3/HRS3 DP9	D10	VOLTS3 DP10	D11	CYCLE2 3	D12	CYCLE3 3	/	/	/	/	

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+DECIMAL PRECISION -0.00, MAX.=+0.00 -DECIMAL PRECISION

REV.

D

PART NUMBER

LCD-S60C101-SR-FX

152mm x 51mm LCD GLASS, 12 7-SEG., TN,
REFLECTIVE, WITH FLEX CABLE.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 8.23.00

PAGE: 2 OF 2

SCALE: N/A