
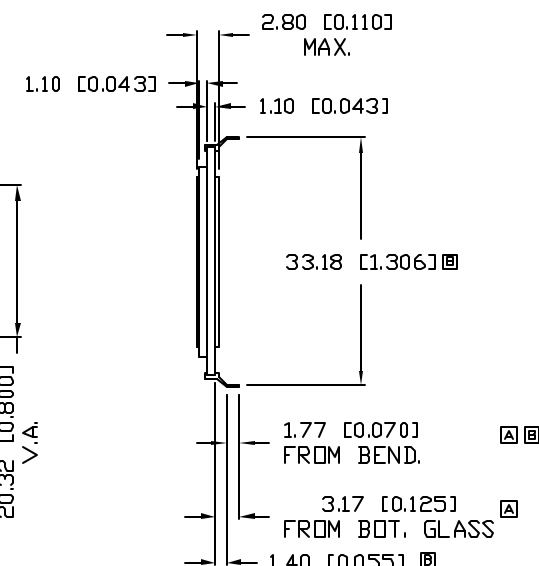


UNCONTROLLED DOCUMENT

PART NUMBER
LCD-S701M61TRREV.
C

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11074.	1.5.04
B	E.C.N. #11086.	1.16.04
C	E.C.N. #11148.	02.09.07

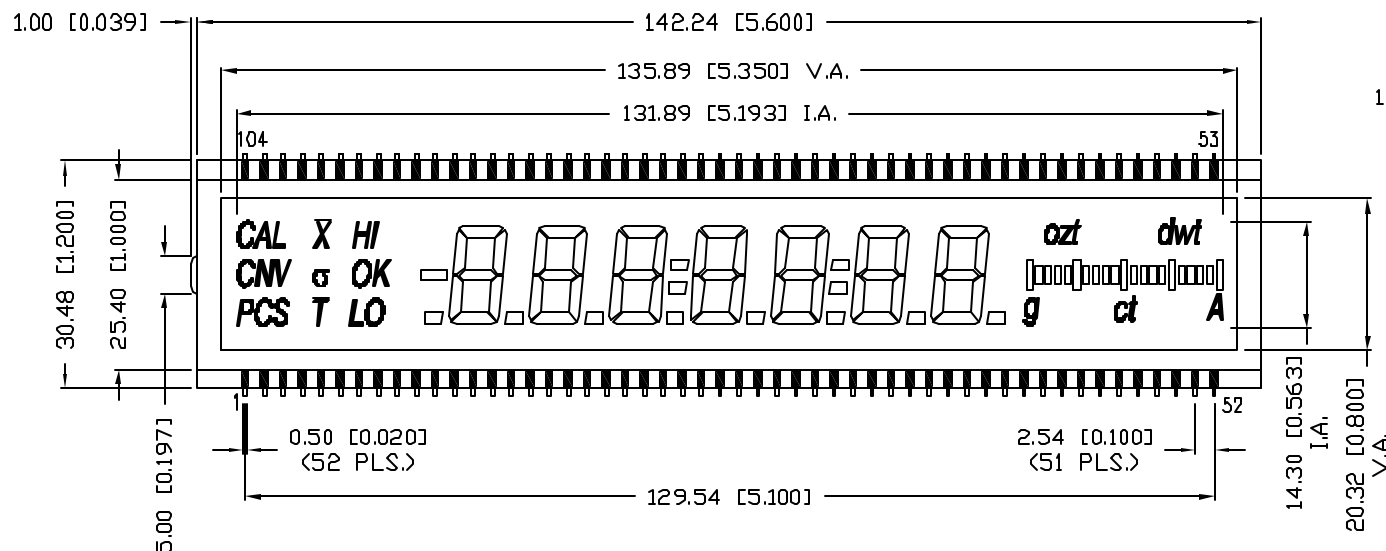

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
SEGMENT	COM	COM	PCS	TBAR	LO	DP8	E7	D7	C7	DP7	EB	D6	C6	DP6	E5	D5	C5	DP5	E4	D4	C4

PIN NO.	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42
SEGMENT	DP4	E3	D3	C3	DP3	E2	D2	C2	DP2	E1	D1	C1	DP1	S1	S6	g	S7	S8	S9	S10	ct

PIN NO.	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
SEGMENT	S11	S16	S17	S18	S19	S20	S21	A	COM	COM	COM	COM	dwt	S15	S14	S13	S12	t	oz	S5	S4

PIN NO.	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84
SEGMENT	S3	S2	B1	A1	F1	G1	B2	A2	F2	G2	COL2	B3	A3	F3	G3	B4	A4	F4	G4	COL1	B5

PIN NO.	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	
SEGMENT	A5	F5	G5	B6	A6	F6	G6	B7	A7	F7	G7	NINUS	HI	OK	XBAR	SIGMA	CAL	CMV	COM	COM	

CHARACTERISTICS	
FLUID TYPE:	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	6:00
DISPLAY MODE:	REFLECTIVE
OPERATING VOLTAGE:	5VAC
OPERATING TEMP.	0°C TO 60°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHODE:	STATIC
CONNECTION TYPE:	104 PINS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00 MAX= +0.00 -DECIMAL PRECISION

REV.
CPART NUMBER
LCD-S701M61TR7 DIGIT CUSTOM LCD PANEL, 6:00 VIEW,
TN, REFLECTIVE, 104 PINS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE:
JC			8.5.02
			PAGE: 1 OF 2
			SCALE: N/A

UNCONTROLLED DOCUMENT

UNCONTROLLED DOCUMENT



PART NUMBER
LCD-S701M61TR

REV.
C

REV. E.C.N. NUMBER AND REVISION COMMENTS
SEE PAGE 1.

DATE

"t" IS SEPERATE SEGMENT
FROM "oz"

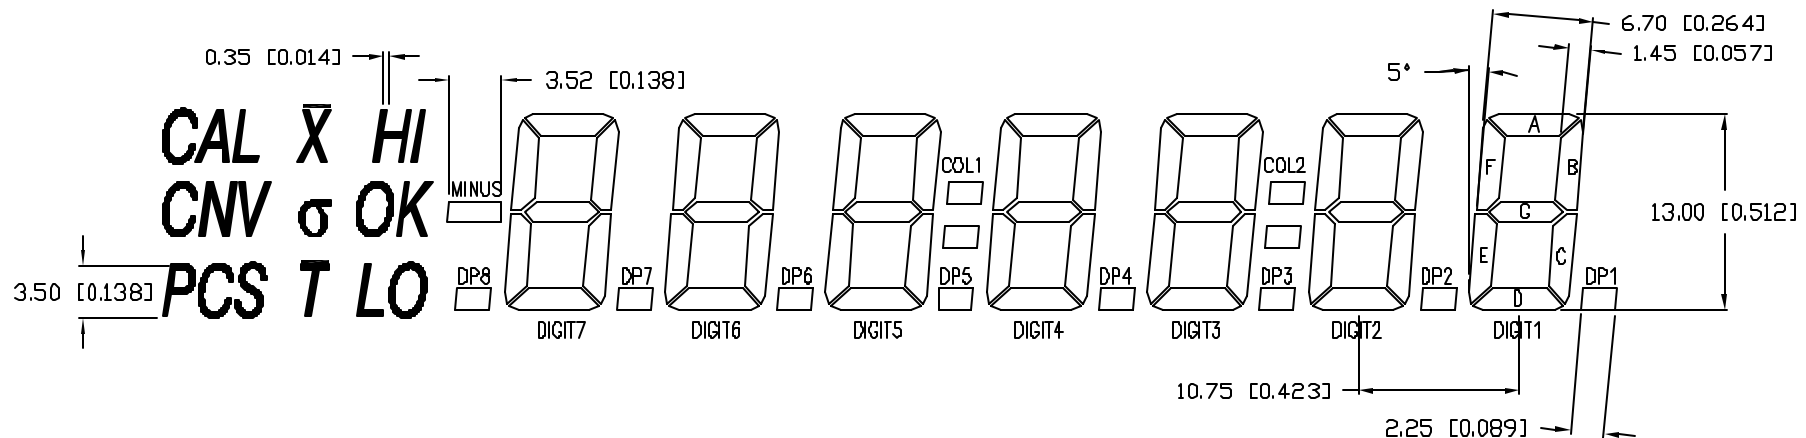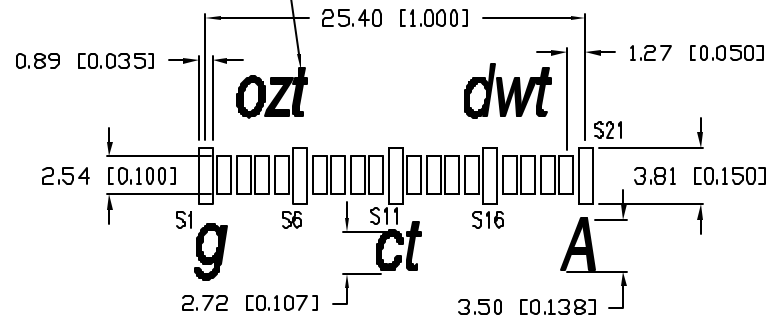

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

REV.
C

PART NUMBER
LCD-S701M61TR

7 DIGIT CUSTOM LCD PANEL, 6:00 VIEW,
TN, REFLECTIVE, 104 PINS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:
JC

CHECKED BY:

APPROVED BY:

DATE: 8.5.02
PAGE: 2 OF 2
SCALE: N/A