


PART NUMBER
LCD-S7X1M20KR

[illegible]

CHARACTERISTICS	
FLUID TYPE	TN POSITIVE
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	3.3V A.C.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-10°C TO 60°C
DRIVING METHOD	1/4DUTY 1/3BIAS
CONNECTION TYPE	FPC

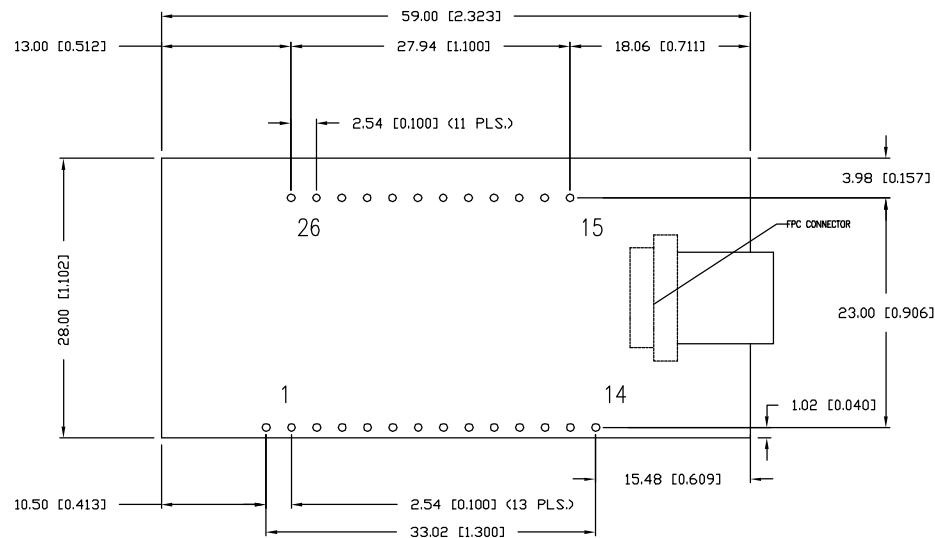

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+0.00 PRECISION MAX.=+0.00 PRECISION
-0.00

PART NUMBER
LCD-S7X1M20KR

CUSTOM LCD ASSEMBLY, 7 DIGITS,
6:00 VIEW, 3.3 TN POSITIVE, GENERAL OPERATING TEMP.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT
SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
Creating LED and LCD Solutions Together™

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 05.12.09
JN			PAGE: 1 OF 2
			SCALE: N/A



COMPANY CONFIDENTIAL

FACTORY PART#


PART NUMBER

LCD-S7X1M20KR

REV.

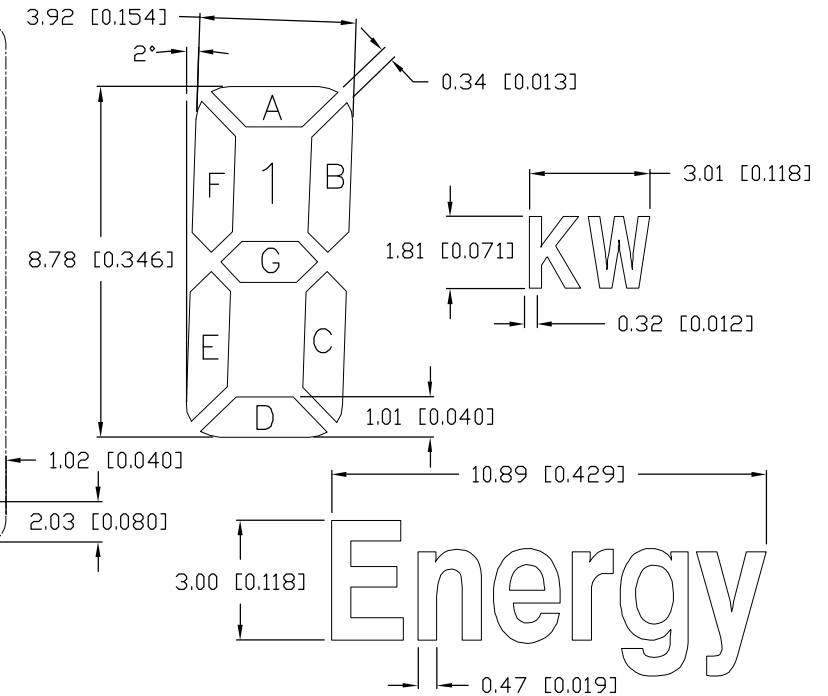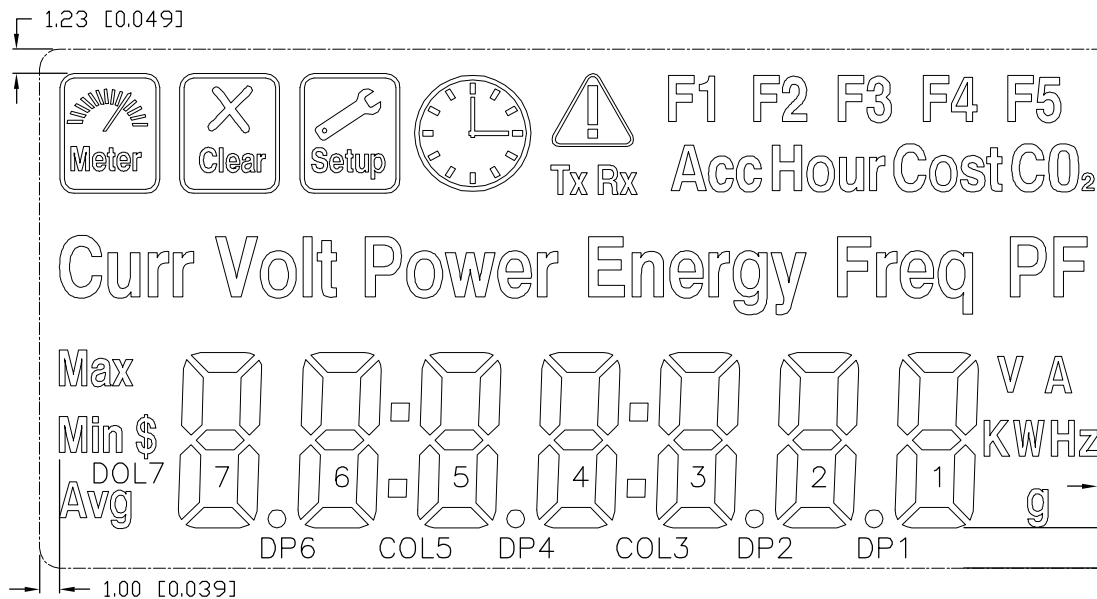

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13
COM0	7F	7A	6F	6A	5F	5A	4F	4A	3F	3A	2F	2A	1F
COM1	7G	7B	6G	6B	5G	5B	4G	4B	3G	3B	2G	2B	1G
COM2	7E	7C	6E	6C	5E	5C	4E	4C	3E	3C	2E	2C	1E
COM3	DOL7	7D	DP6	6D	COL5	5D	DP4	4D	COL3	3D	DP2	2D	DP1
PIN	14	15	16	17	18	19	20	21	22	23	24	25	26
COM0	1A	--	--	--	COM0	AVG	F1	CURR	ACC	FREQ	SA	SH	METER
COM1	1B	--	--	COM1	--	MIN	F2	VOL	HOUR	PF	SV	SZ	CLEAR
COM2	1C	--	COM2	--	--	MAX	F3	PWR	COST	TX	SK	SG	SETUP
COM3	1D	COM3	--	--	--	F5	F4	ENG	CO2	RX	SW	WARN	TIME

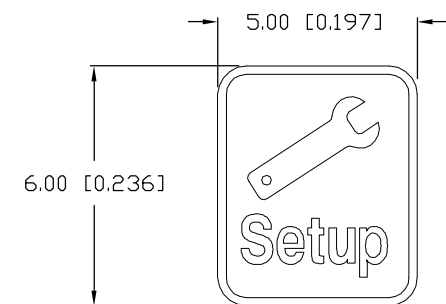

CM C3 C3

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

REV.

PART NUMBER

LCD-S7X1M20KR

CUSTOM LCD ASSEMBLY, 7 DIGITS,
6:00 VIEW, 3.3 TN POSITIVE, GENERAL OPERATING TEMP.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
Creating LED and LCD Solutions Together™

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JN

CHECKED BY:

APPROVED BY:

DATE: 05.12.09

PAGE: 2 OF 2

SCALE: N/A