


PART NUMBER	LCD-S801A58TR	REV.	C
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
06.09.00	E.C.N. #10619.		A
04.17.07	E.C.N. #11148.		B
12.05.11	E.C.N. #10BRDR. & REDRAWN.		C

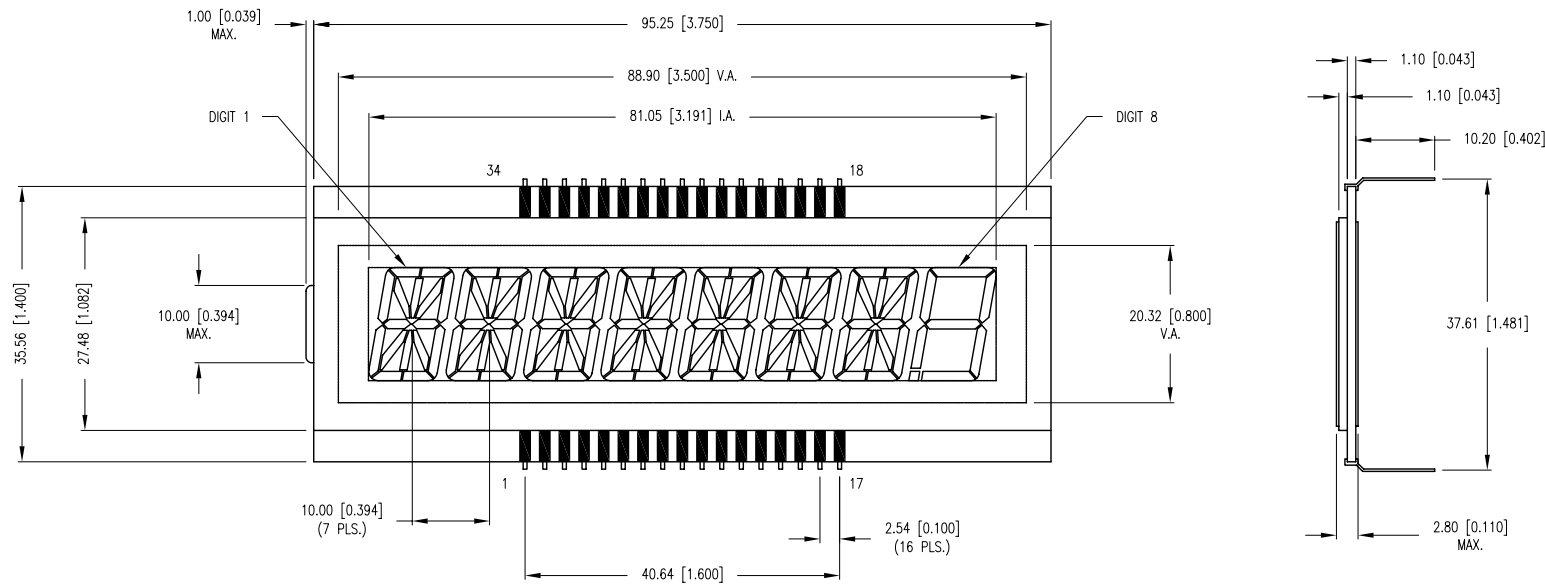

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
COM 1	1H	1C	2H	2C	3H	3C	4H	4C	5H	5C	6H	6C	7H				COM1
COM 2	1I	1D	2I	2D	3I	3D	4I	4D	5I	5D	6I	6D	7I				COM2
COM 3	1G	1N	2G	2N	3G	3N	4G	4N	5G	5N	6G	6N	7G				COM3
COM 4	1F	1E	2F	2E	3F	3E	4F	4E	5F	5E	6F	6E	7F	COM4			
PIN NO.	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
COM 1	8A	8F	7C	7B	7A	6B	6A	5B	5A	4B	4A	3B	3A	2B	2A	1B	1A
COM 2	8B	8G	7D	7K	7J	6K	6J	5K	5J	4K	4J	3K	3J	2K	2J	1K	1J
COM 3	8C	8E	7N	7M	7L	6M	6L	5M	5L	4M	4L	3M	3L	2M	2L	1M	1L
COM 4	8D	8H	7E	7O	7P	6O	6P	5O	5P	4O	4P	3O	3P	2O	2P	1O	1P

CHARACTERISTICS

FLUID TYPE:	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	6:00
DISPLAY MODE:	REFLECTIVE
OPERATING VOLTAGE:	3.0V AC.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHODE:	1/4 DUTY, 1/3 BIAS
CONNECTION TYPE:	34 PINS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= -DECIMAL PRECISION

UNCONTROLLED DOCUMENT



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

8 DIGIT LCD GLASS. 7 ALPHANUMERIC, 1 CUSTOM DIGIT, TN, REFLECTIVE, 34 PINS.


THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.


DATE:	12.05.11	DRAWN BY:	AB
PAGE:	1 OF 2	CHKD BY:	SS
SCALE:	NTS	APRVD BY:	KF
UNIT:	mm [INCH]		Ⓟ

PART NUMBER	LCD-S801A58TR	REV.	C
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
06.09.00	E.C.N. #10619.		A
04.17.07	E.C.N. #11148.		B
12.05.11	E.C.N. #10BRDR. & REDRAWN.		C

A 16 SEGMENT DIGIT DETAIL

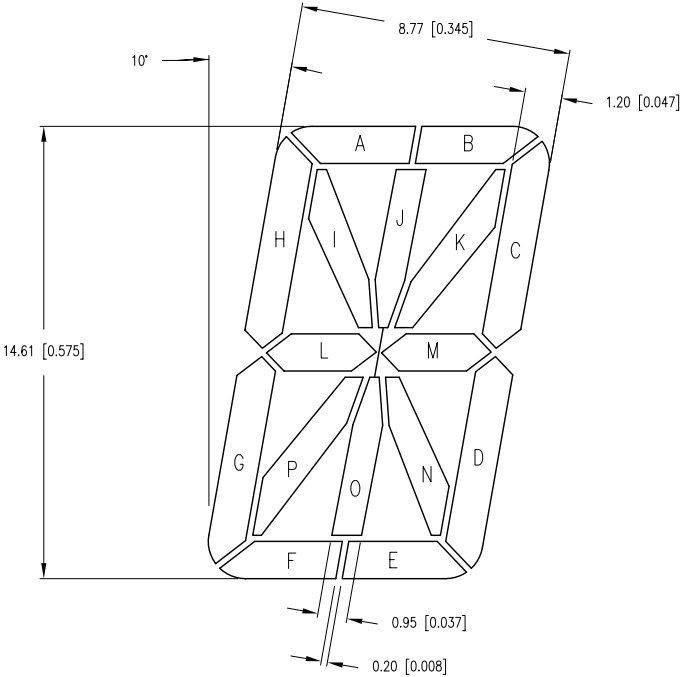

8 SEGMENT DIGIT DETAIL

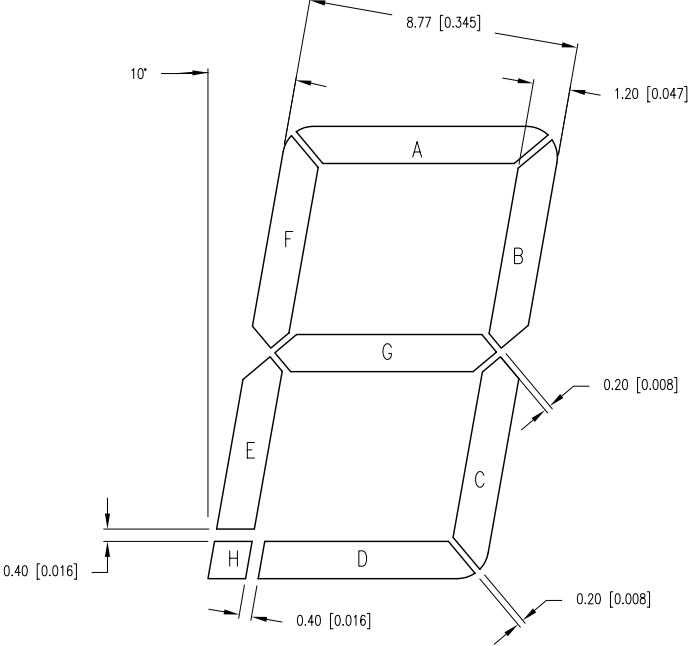

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION

 LUMEX Creating LED and LCD Solutions Together™	290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM	8 DIGIT LCD GLASS. 7 ALPHANUMERIC, 1 CUSTOM DIGIT, TN, REFLECTIVE, 34 PINS.		DATE: 12.05.11	DRAWN BY: AB
		THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.		PAGE: 2 OF 2	CHKD BY: SS
		CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.		SCALE: NTS	APRVD BY: KF
				UNIT: mm [INCH]	Ⓟ