

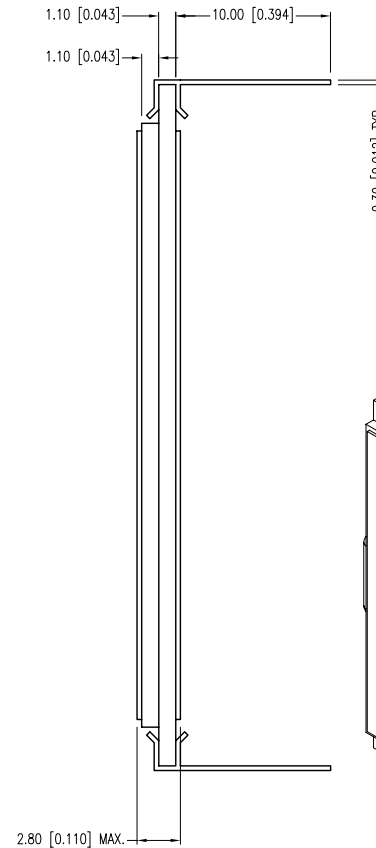


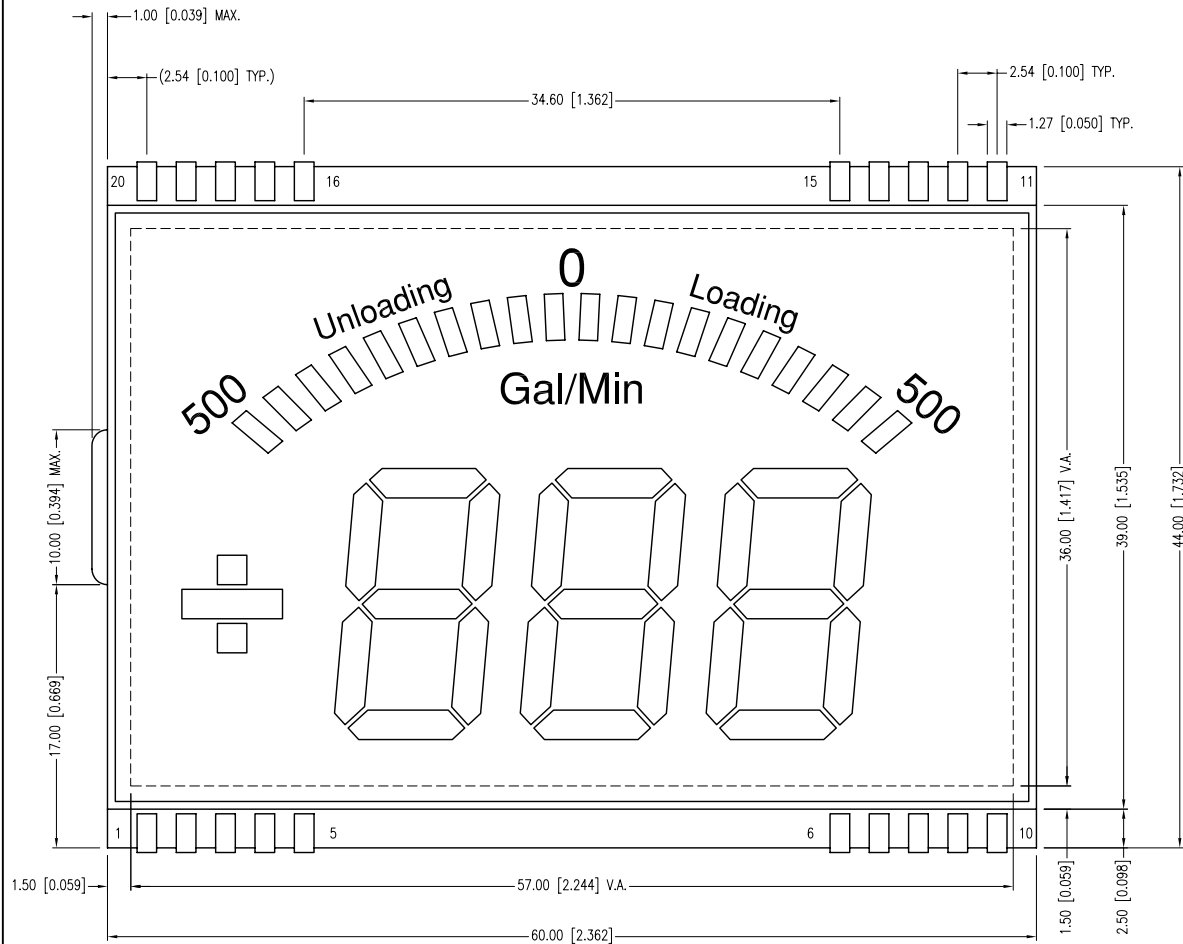

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	-
VIEWING DIRECTION	6:00
DISPLAY MODE	-
OPERATING VOLTAGE	3.3V
OPERATING TEMP.	-40°C TO +70°C
STORAGE TEMP.	-40°C TO +80°C
DRIVING METHOD	1/3 DUTY, 1/3 BIAS
CONNECTION TYPE	PIN

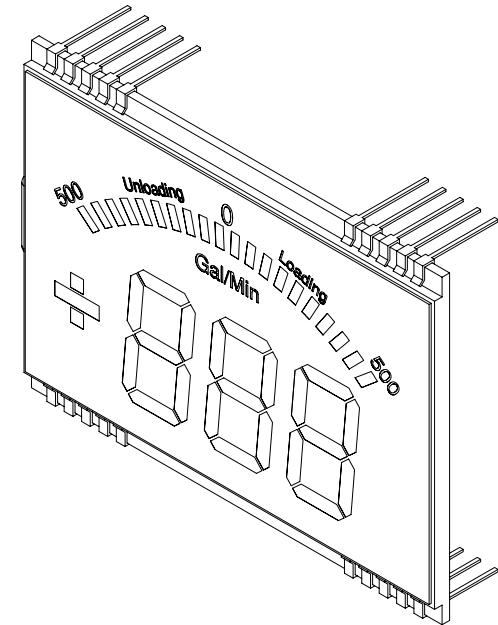

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= +DECIMAL PRECISION

UNCONTROLLED DOCUMENT





290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

CUSTOM LCD.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	09.26.11	DRAWN BY:	AB
PAGE:	1 OF 2	CHKD BY:	SS
SCALE:	NTS	APRVD BY:	JD
UNIT:	mm [INCH]		Ⓟ

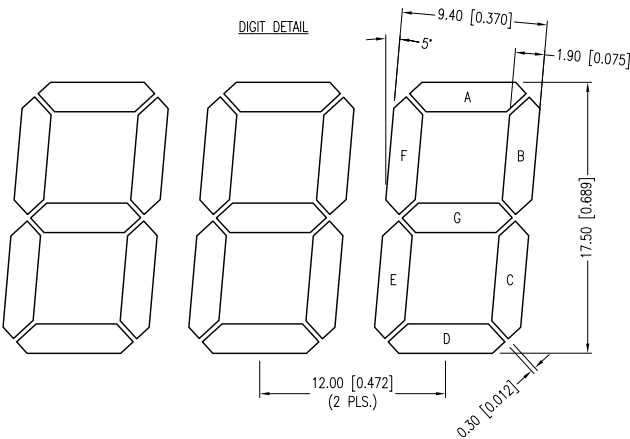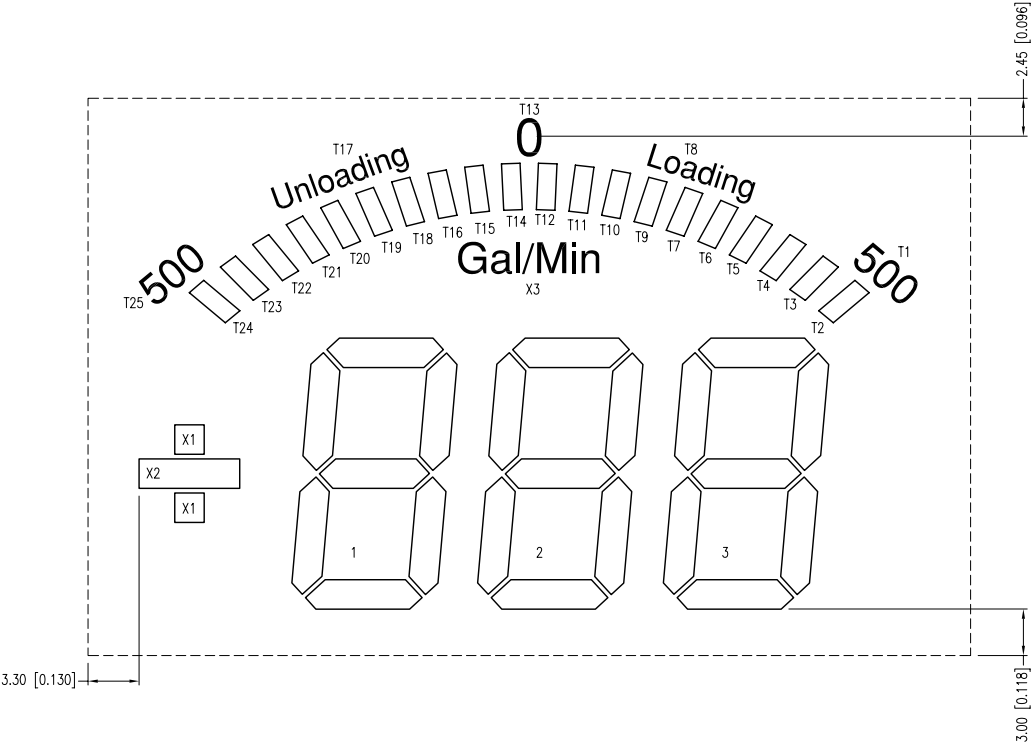

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM1	COM1	-	-	X1	1A	X2	X3	2A	-	-	3A	T1	T2	T7	T8	T13	T14	T19	T20	T25
COM2	-	COM2	-	1F	1G	1B	2F	2G	2B	3F	3G	3B	T3	T6	T9	T12	T15	T18	T21	T24
COM3	-	-	COM3	1E	1D	1C	2E	2D	2C	3E	3D	3C	T4	T5	T10	T11	T16	T17	T22	T23