


UNCONTROLLED DOCUMENT

PART NUMBER
LCD-UH1201M20TFREV.
A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	02.09.07

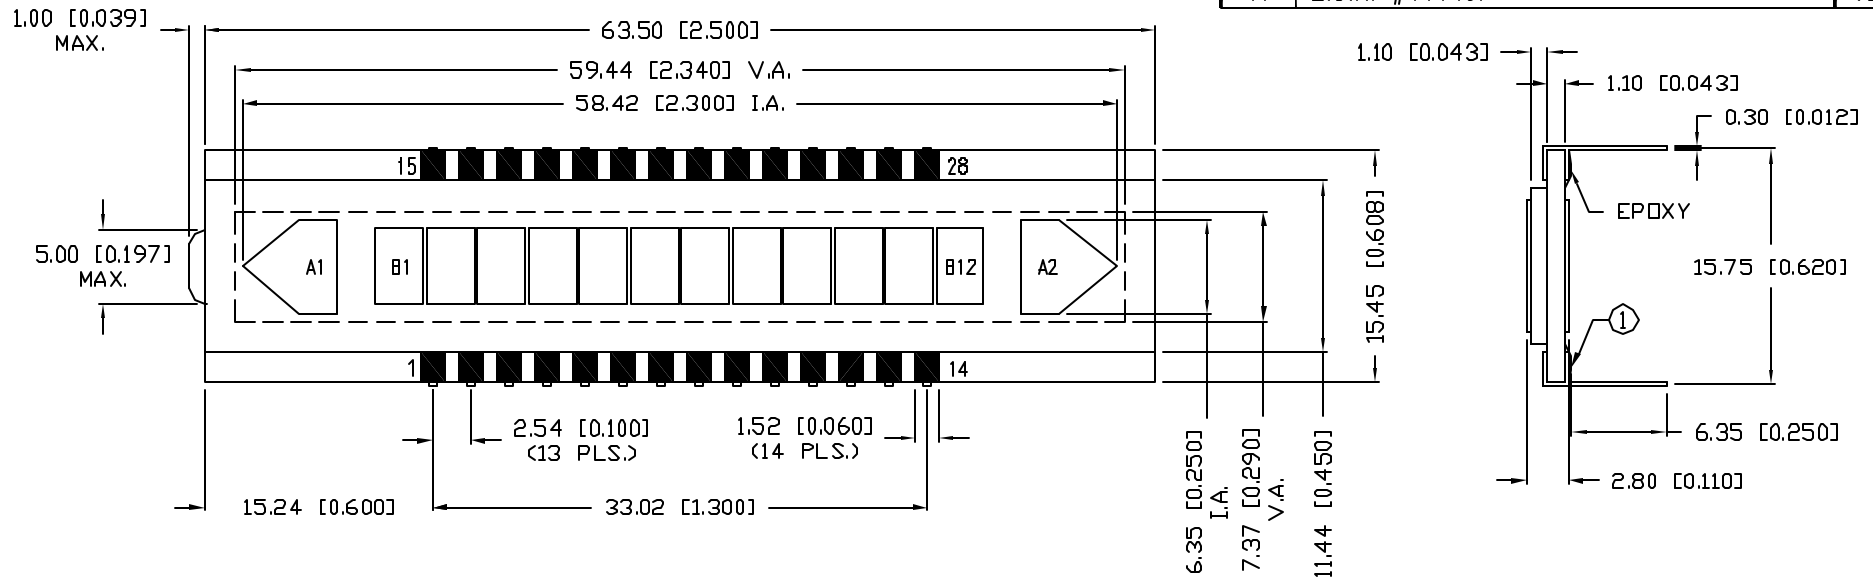

CHARACTERISTICS


FLUID TYPE:	TN
BACKGROUND COLOR:	NEUTRAL
VIEWING DIRECTION:	6:DO
DISPLAY MODE:	TRANSFLECTIVE
OPERATING VOLTAGE:	7.DVAC
OPERATING TEMP.	-40°C TO 85°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHOD:	STATIC
CONNECTION TYPE:	28 PINS

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
SEGMENT	COM	B1	-	B3	-	B5	-	B7	-	B9	-	B11	-	A2
PIN NO.	15	16	17	18	19	20	21	22	23	24	25	26	27	28
SEGMENT	COM	A1	-	B2	-	B4	-	B6	-	B8	-	B10	-	B12

NOTES:

1. EPOXY HEIGHT SHOULD NOT EXCEED THE BOTTOM POLARIZER.

SEGMENT DETAIL

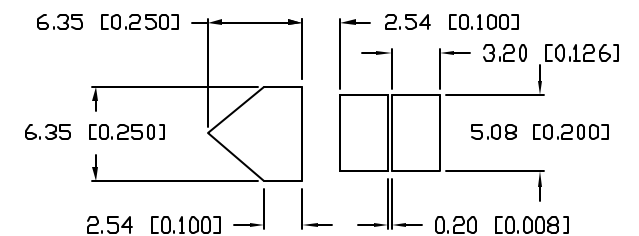

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=^{+DECIMAL PRECISION}_{-0.00} MAX.=^{+0.00}_{-DECIMAL PRECISION}

REV.

A

PART NUMBER

LCD-UH1201M20TF

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

12 BAR SEGMENT LCD PANEL, TN, TRANSFLECTIVE, 28 PINS,
-40°C TO +85°C OPER. TEMP, FIRST MINIMUM FLUID.

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 11.19.02

PAGE: 1 OF 1

SCALE: N/A