



PART NUMBER		REV.
LCD-UH2801M20TR		A
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	02.09.07

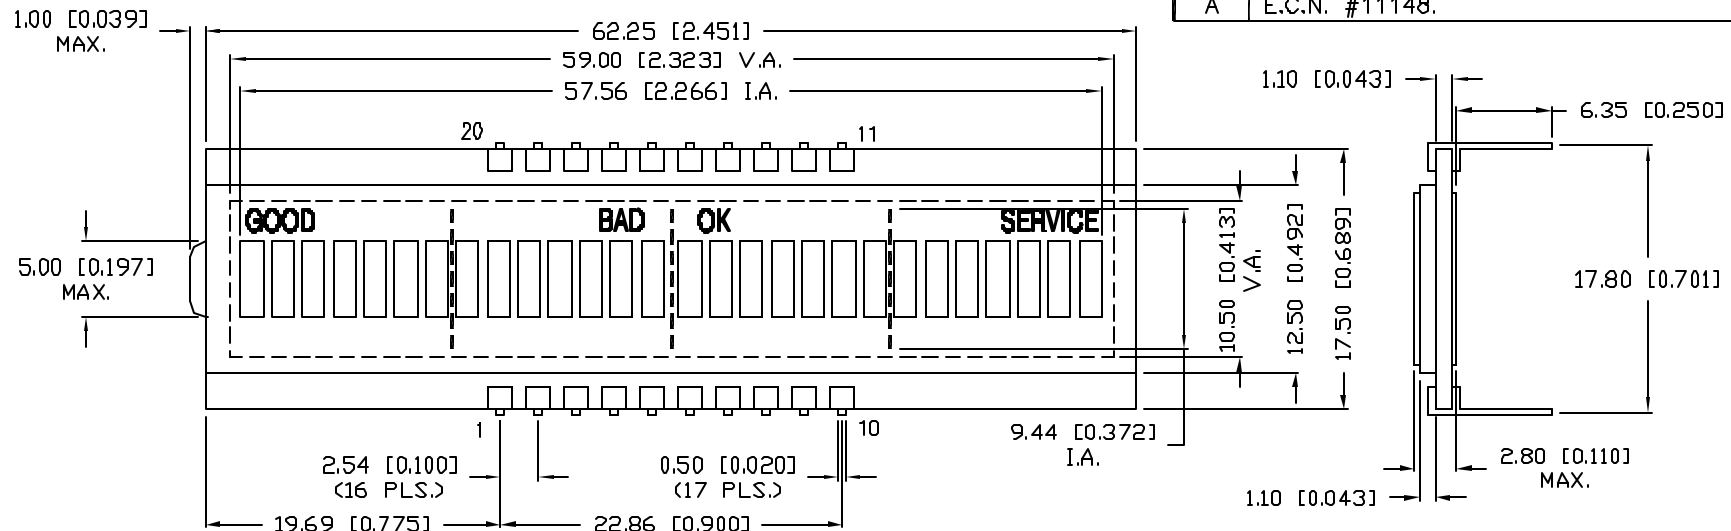

NOTES:

1. "GOOD" IS SILK SCREENED, COLOR: BLACK.
2. EPOXY HEIGHT SHOULD NOT EXCEED THE BOTTOM POLARIZER.

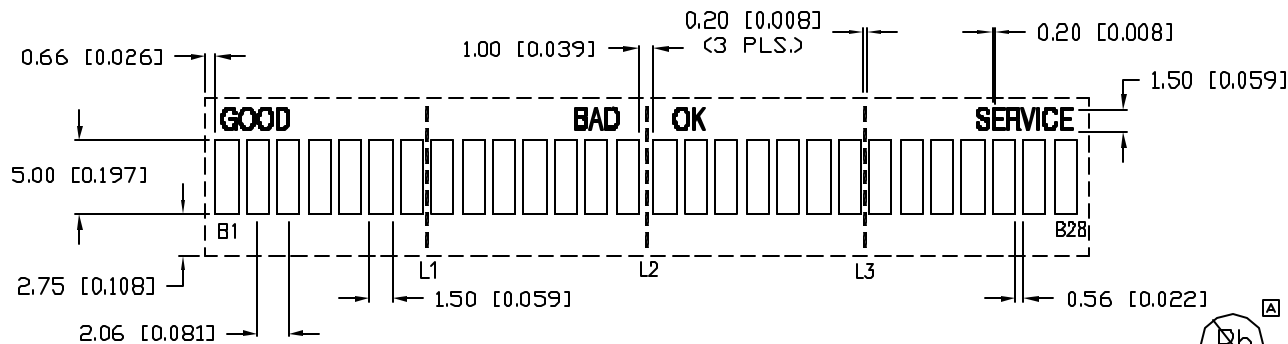

CHARACTERISTICS

FLUID TYPE:	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	6:00
DISPLAY MODE:	REFLECTIVE
OPERATING VOLTAGE:	3.0V
OPERATING TEMP.	-40°C TO 85°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHOD:	1/2 DUTY, 1/2 BIAS
CONNECTION TYPE:	20 PINS

PIN NO.	1	2	3	4	5	6	7	8	9	10
COM0	COM0		B1	B3	B5	B7	B9	B11	B13	BAD
COM1		COM1	B2	B4	B6	L1	B8	B10	B12	B14
PIN NO.	11	12	13	14	15	16	17	18	19	20
COM0	B27	B25	B23	L3	B21	B19	B17	OK	B15	/
COM1	B28	B26	B24	B22	B20	B18	B16	SERVICE	L2	/

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+0.00 DECIMAL PRECISION MAX.=+0.00 DECIMAL PRECISION

REV.

A

PART NUMBER

LCD-UH2801M20TR

28 BAR SEGMENT CUSTOM LCD PANEL, TN, REFLECTIVE,
-40°C TO +85°C OPERATING TEMPERATURE.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 11.6.02

PAGE: 1 OF 1

SCALE: N/A