


PART NUMBER				REV.
LCD-UH301M41TF				A
REV.	E.C.N. NUMBER AND REVISION COMMENTS			DATE
A	SEE PAGE #1			

PINOUT TABLE

PIN NO.	1	2	3	4	5	6	7	8
SEGMENT	COM	3G	3E	3D	3C	2A	2F	2G
PIN NO.	9	10	11	12	13	14	15	16
SEGMENT	2E	2D	2C	DP	1G	1E	1D	1C
PIN NO.	17	18	19	20	21	22	23	24
SEGMENT	T3	AUT	T2	T4	T6	COM	T5	T7
PIN NO.	25	26	27	28	29	30	31	32
SEGMENT	T1	1B	T8	1A	1F	2B	BAR8	BAR7
PIN NO.	33	34	35	36	37	38	39	40
SEGMENT	BAR6	BAR5	BAR4	BAR3	T9	BAR2	BAR1	3B
PIN NO.	41	42						
SEGMENT	3A	3F						

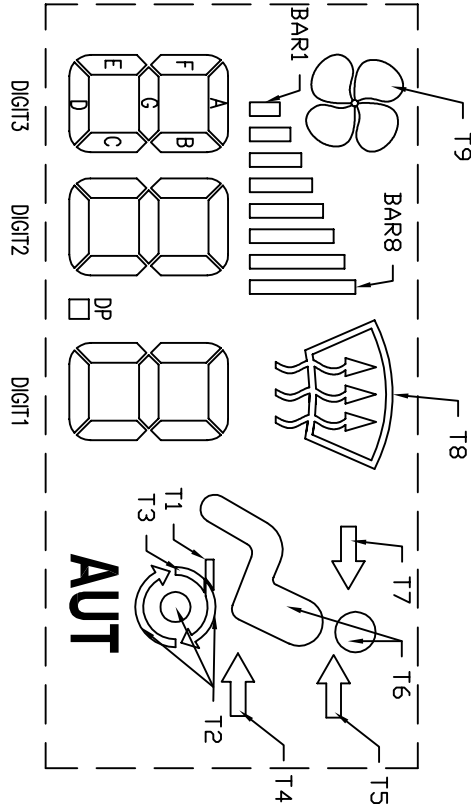

CHARACTERISTICS

FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	5.0V A.C.
OPERATING TEMP.	-40°C TO +85°C
STORAGE TEMP.	-40°C TO +85°C
DRIVING METHOD	STATIC
CONNECTION TYPE	42 PINS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= -0.00

REV.

PART NUMBER

A LCD-UH301M41TF

3 DIGIT CUSTOM LCD, TN, TRANSFLECTIVE,
-40°C TO +85°C OPERATING TEMP., 42 PINS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE






OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.





290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE:
JC	YA	YA	5.7.02
			PAGE: 2 OF 3
			SCALE: N/A

PART NUMBER			REV.
LCD-UH301M41TF			A
REV.	E.C.N. NUMBER AND REVISION COMMENTS		DATE
A	SEE PAGE #1		

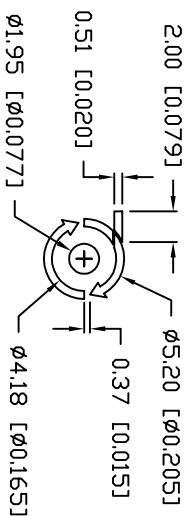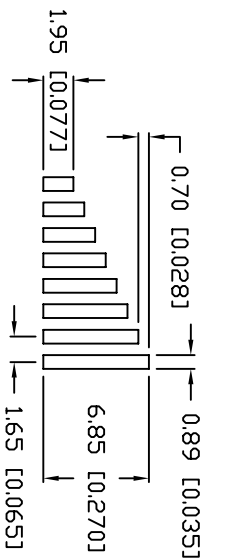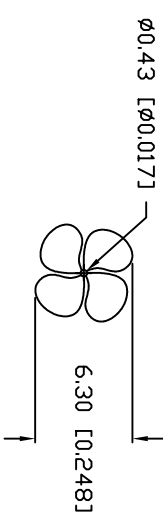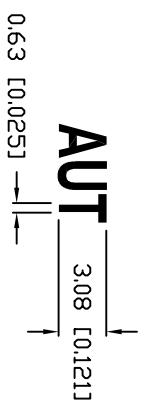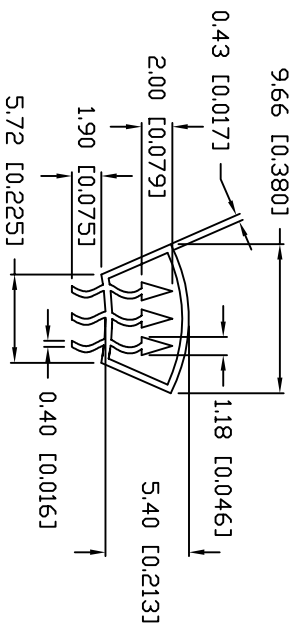

DIGIT DETAIL

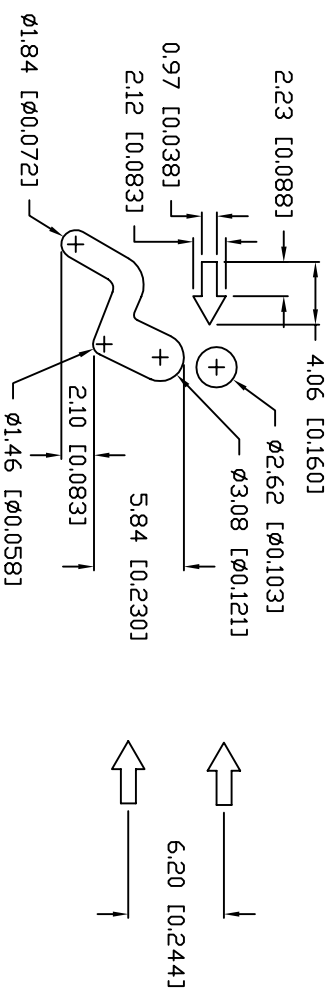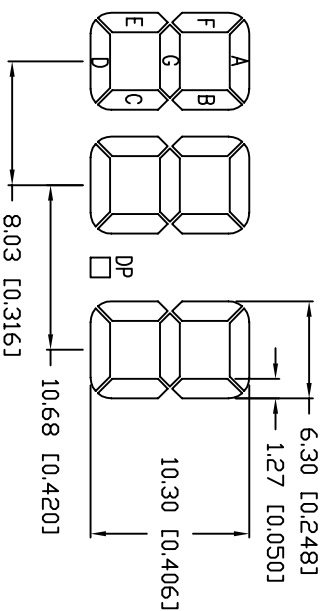

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= -0.00

REV.

PART NUMBER

LCD-UH301M41TF

3 DIGIT CUSTOM LCD, TN, TRANSPARENT,
-40°C TO +85°C OPERATING TEMP., 42 PINS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE:
JC	YA	YA	5.7.02
PAGE: 3 OF 3			SCALE: N/A