UNCONTROLLED DOCUMENT

PART NUMBER	REV.
LCD–UH701M19TR–1	A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	4.17.07

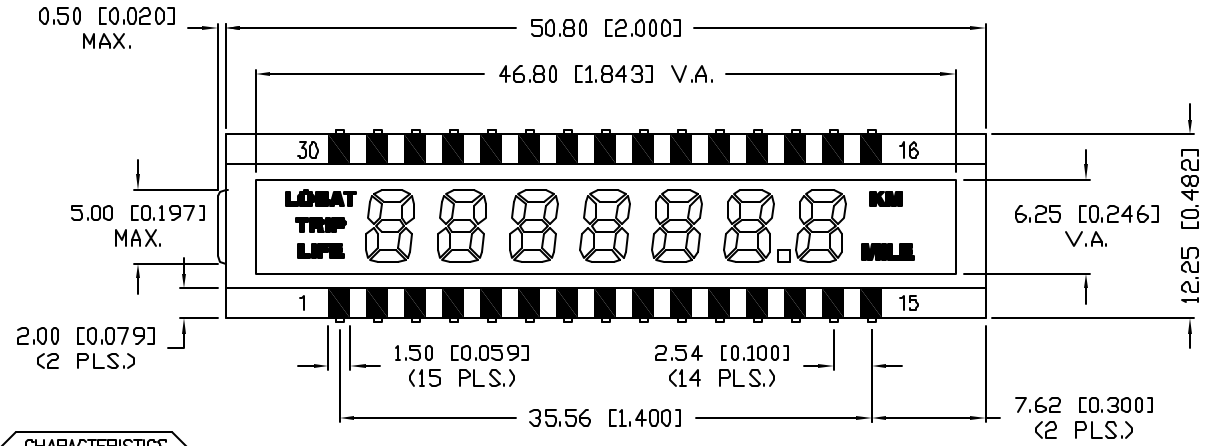

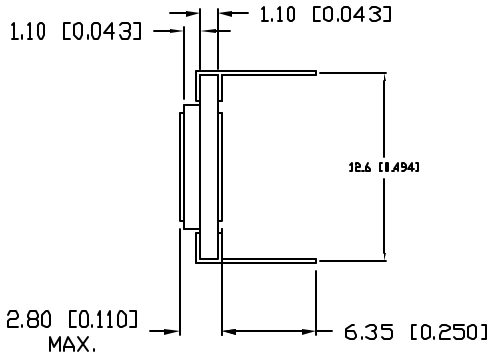

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	12:00
DISPLAY MODE	REFLECTIVE
OPERATING VOLTAGE	4.0V A.C.
OPERATING TEMP.	–40°C TO +85°C
STORAGE TEMP.	–40°C TO +85°C
DRIVING METHOD	1/2 DUTY
CONNECTION TYPE	30 PINS

PIN NO.	1	2	3	4	5	6	7	8	9	10
COM 1	1E	1G	1A	2F	2E	2G	2A	3E	3G	4E
COM 2	1D	1C	1B	S1	2D	2C	2B	3D	3C	4D
PIN NO.	11	12	13	14	15	16	17	18	19	20
COM 1	4G	4A	5F	7F	COM1	7E	7G	7A	6E	6G
COM2	4C	4B	S5	S4	/	7D	7C	7B	6D	6C
PIN NO.	21	22	23	24	25	26	27	28	29	30
COM 1	6A	6F	5E	5G	5A	4F	3A	3F	1F	/
COM 2	6B	DP	5D	5C	5B	/	3B	S2	S3	COM2

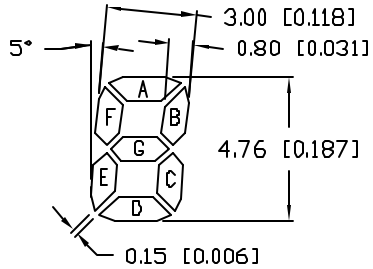

PANEL DETAIL

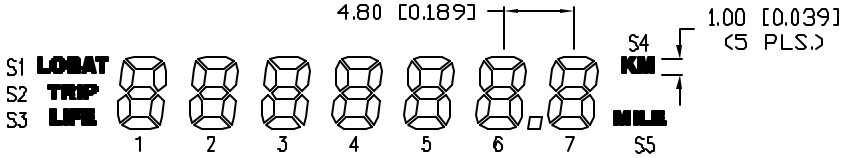

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION −0.00 MAX.= +0.00 −DECIMAL PRECISION

REV.	PART NUMBER
A	LCD–UH701M19TR–1

0.19" SEVEN DIGIT LCD PANEL, TN, REFLECTIVE, 12:00 VIEW, –40°C TO +85°C OPERATING TEMP.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX INC.
290 E. HELEN ROAD
PALATINE, IL 60067–6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 9.22.00
JC			PAGE: 1 OF 1
			SCALE: N/A