

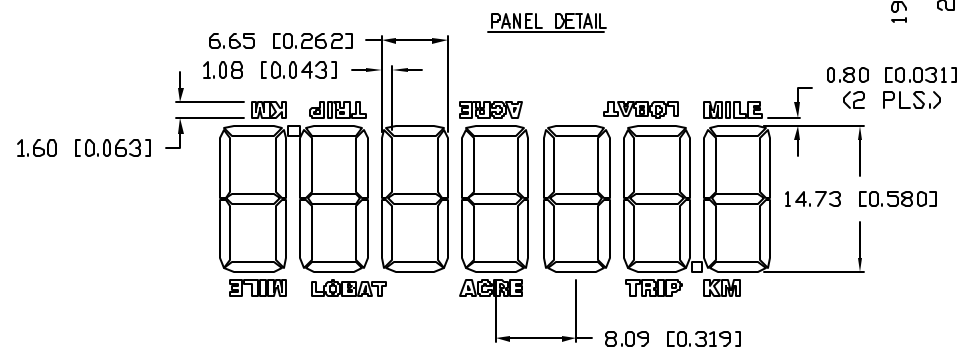
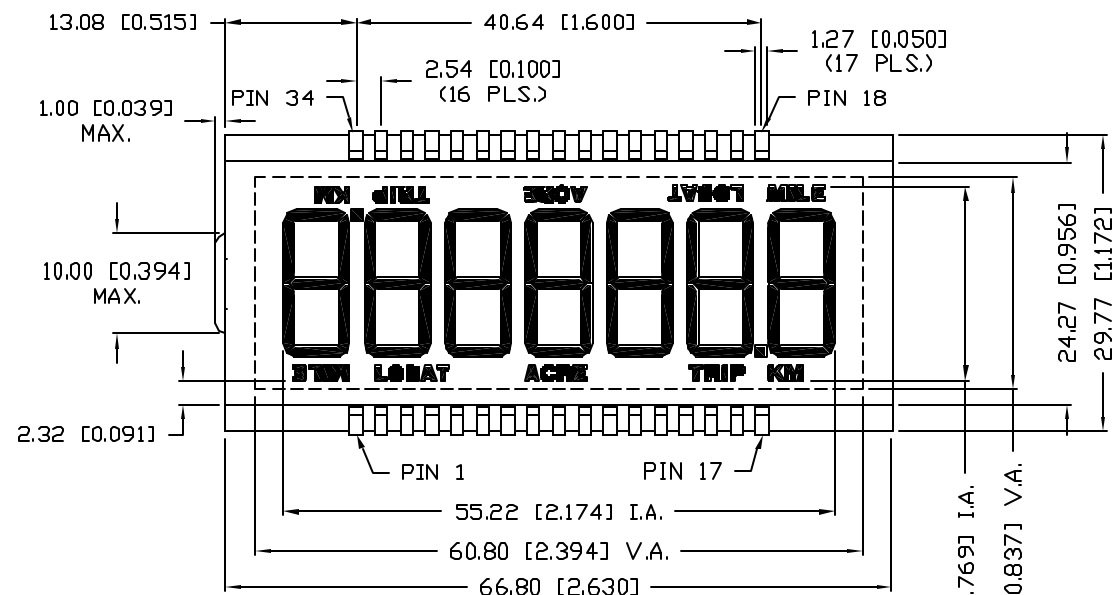


UNCONTROLLED DOCUMENT

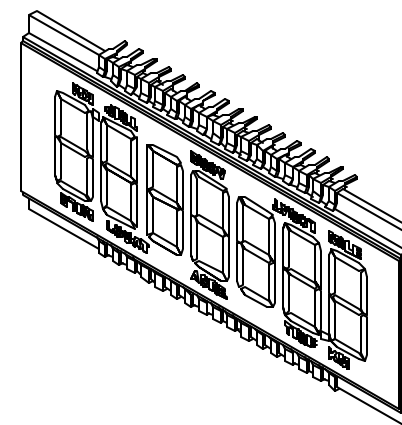

PART NUMBER		REV.
LCD-UH701M47TF		C
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #10730.	4.25.01
B	E.C.N. #10753.	5.29.01
C	E.C.N. #11148.	4.17.07

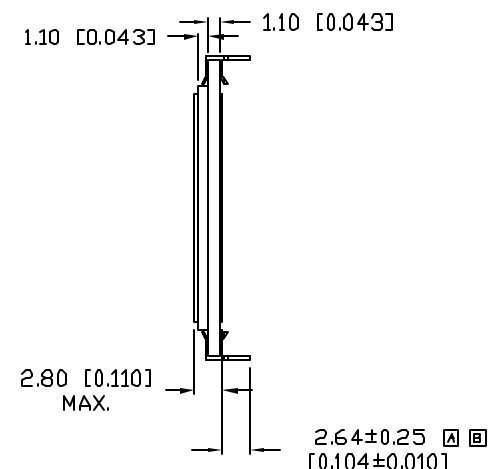


UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+0.00 DECIMAL PRECISION MAX.=+0.00 DECIMAL PRECISION

REV.	PART NUMBER	CONFIDENTIAL INFORMATION		LUMEX		290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw	
C	LCD-UH701M47TF	THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.					
0.58" 7 DIGITS, CUSTOM LCD PANEL, TN, TRANSFLECTIVE, -40°C TO +85°C OPERATING TEMPERATURE, 34 PINS.		RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.		DRAWN BY: JC	CHECKED BY:	APPROVED BY:	DATE: 2.26.01 PAGE: 1 OF 2 SCALE: N/A


UNCONTROLLED DOCUMENT

PART NUMBER		REV.
LCD-UH701M47TF		C
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
	SEE PAGE #1	

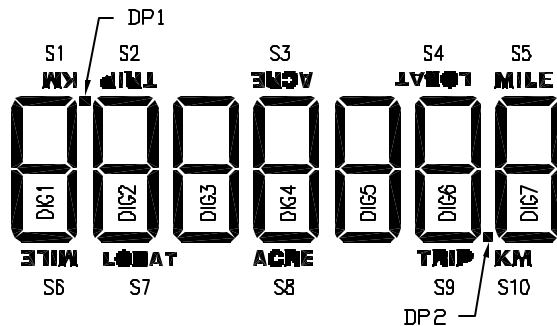

CHARACTERISTICS	
FLUID TYPE	TN
BACKGROUND COLOR	GRAY
VIEWING DIRECTION	6:00
DISPLAY MODE	TRANSFLECTIVE
OPERATING VOLTAGE	3.0V A.C.
OPERATING TEMP.	-40°C TO 85°C
STORAGE TEMP.	-40°C TO 85°C
DRIVING METHOD	1/2 DUTY, 1/2 BIAS
CONNECTION TYPE	34 PINS

PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12
COM1	COM1	1E	1D	1C	2E	2D	2C	3E	3D	4E	4D	4C
COM2	/	1F	S6	1B	2F	S7	2B	3F	S8	4F	4G	4B
PIN	13	14	15	16	17	18	19	20	21	22	23	24
COM1	5E	5D	6E	6D	7D	7C	/	7G	7E	6C	/	6G
COM2	5F	S9	6F	DP2	S10	7B	S5	7A	7F	6B	S4	6A
PIN	25	26	27	28	29	30	31	32	33	34	/	/
COM1	5C	5G	S3	3C	3G	2G	DP1	/	1G	/	/	/
COM2	5B	5A	4A	3B	3A	2A	S2	S1	1A	CON2	/	/



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.029), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN=+DECIMAL PRECISION MAX.=+0.00 -0.00 DECIMAL PRECISION

REV.	PART NUMBER	CONFIDENTIAL INFORMATION		LUMEX		290 E. HELEN ROAD	
C	LCD-UH701M47TF	THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.		PALATINE, IL 60067-6976		PHONE: +1.847.359.2790	
0.58" 7 DIGITS, CUSTOM LCD PANEL, TN, TRANSFLECTIVE, -40°C TO +85°C OPERATING TEMPERATURE, 34 PINS.		RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.		US WEB: www.lumex.com		TW WEB: www.lumex.com.tw	
		DRAWN BY: JC		CHECKED BY:		APPROVED BY:	
						DATE: 2.26.01	
						PAGE: 2 OF 2	
						SCALE: N/A	