


А

CHARACTER DETAIL

3.20 [0.126] **→** 0.50 [0.020] 0.60 [0.024] - 0.65 [0.026] 0.05 [0.002] 5.55 [0.219] 5.95 [0.234] 0.40 [0.016] -|-- 0.05 [0.002]

PIN DETAIL 3.05 [0.120] **—** 2.54 [0.100] 5.84 [0.230] -2.54 [0.100] -0.62 [0.024] - 11,43 [0,450] SQR.

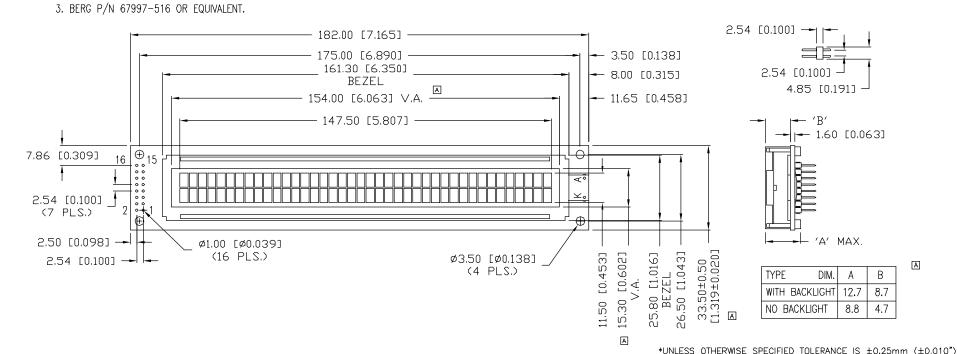

PART NUMBER REV. LCM-S04002DSF-Y1P

CAUTION: STATIC SENSITIVE DEVICE

FOLLOW PROPER E.S.D. HANDLING PROCEDURES

WHEN WORKING WITH THIS PART.

NOTES:

1. 8 x 2 HEADER PINS.

2. 0.000030" GOLD PLATED.

5.55mm CHARACTER HEIGHT, 5 \times 8 DOT MATRIX, 40 \times 2 CHARACTER LCD MODULE, STN YELLOW, 1/16 DUTY, 1/5 BIAS, 12:00 VIEW, WITH PINS.

CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS. INCORPORATED

290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 PHONE: 1-847-359-2790 WEB: HTTP://WWW.LUMEX.COM

APPROVED BY: DATE: 4-7-98 CHECKED BY: DRAWN BY: 1 OF 2 PAGE: SCALE: N/A DU/BC