
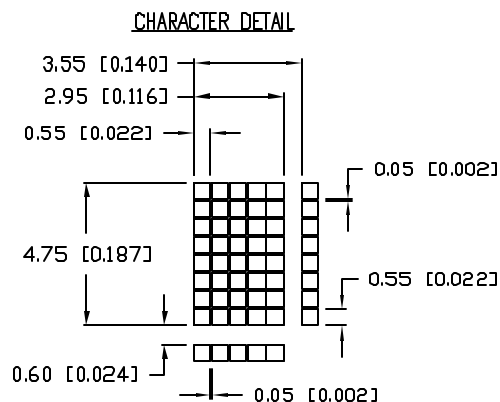
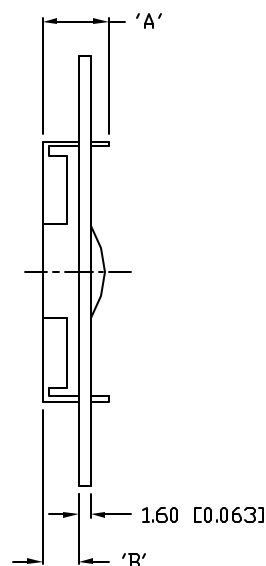


UNCONTROLLED DOCUMENT

P/N PREFIX/SUFFIX TABLE		
LCM-X	DX	DESCRIPTION
STANDARD	S	SR STN, REFLECTIVE
	SF	STN, TRANSFLECTIVE(W/ BACKLIGHT)
HIGH TEMP.	H	TR TN, REFLECTIVE
	TF	TN, TRANSFLECTIVE(W/ BACKLIGHT)

PART NUMBER		REV.
LCM-X01004DXX		
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE

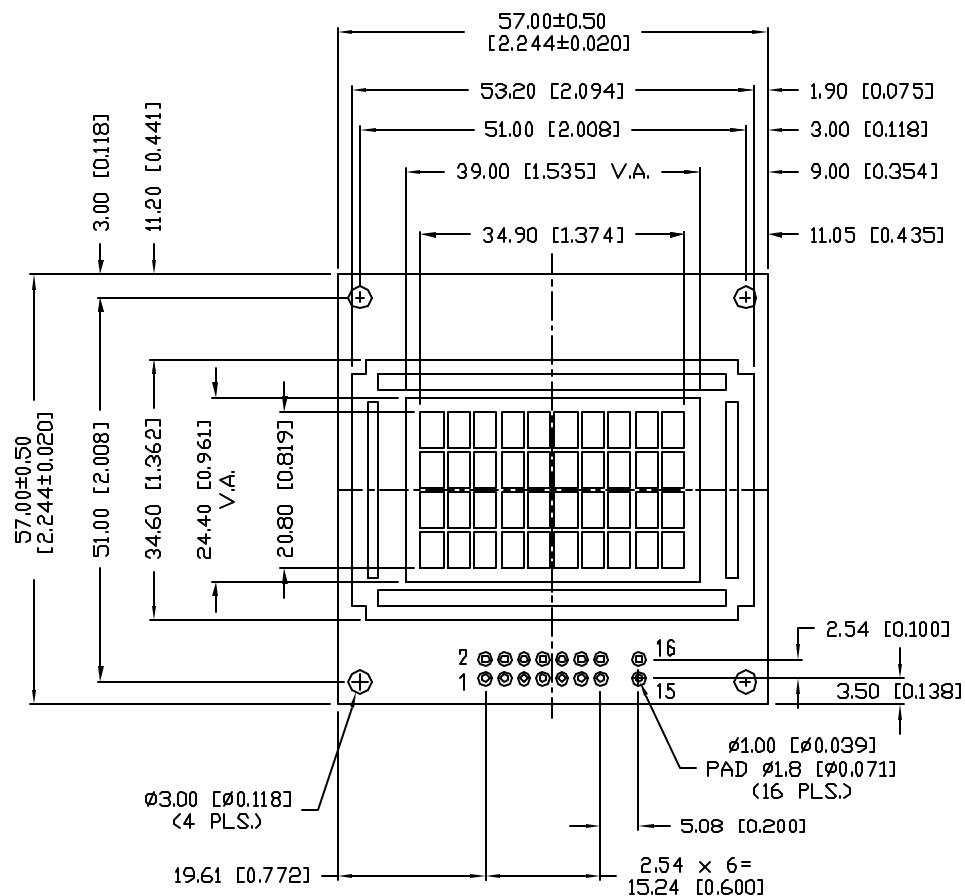

TYPE	DIM.	A	B
WITH BACKLIGHT		12.7	8.8
NO BACKLIGHT		8.9	4.8

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±0.25mm (±0.010")

REV.	PART NUMBER LCM-X01004DXX	CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES. RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.		LUMEX INCORPORATED 290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 PHONE: 1-847-359-2790 WEB: HTTP://WWW.LUMEX.COM	
4.75mm TALL, 5 x 8 DOT MATRIX, 10 x 4 CHARACTER LCD MODULE, 1/16 DUTY, 1/5 BIAS.		DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 2-18-99
		SA/DU			PAGE: 1 OF 2 SCALE: N/A

UNCONTROLLED DOCUMENT

PART NUMBER
LCM-X01004DXX

REV.


REV. E.C.N. NUMBER AND REVISION COMMENTS

DATE


PIN CONFIGURATION

PIN NO.	SYMBOL	LEVEL	FUNCTION	
1	V_{SS}	-	POWER SUPPLY	GND (0V)
2	V_{DD}	-		5V
3	V_o	-		FOR LCD DRIVE
4	RS	H/L	REGISTER SELECT SIGNAL H: DATA INPUT L: INSTRUCTION INPUT	
5	R/W	H/L	H: DATA READ (MODULE $\rightarrow$ MPU) L: DATA WRITE (MODULE $\leftarrow$ MPU)	
6	E	H,H $\rightarrow$ L	ENABLE	
7~14	DB0~DB7	H/L	DATA BUS—SOFTWARE SELECTABLE 4 OR 8 BIT MODE.	
15	A	-	ANODE	LED BACKLIGHT
16	K	-	CATHODE	LED BACKLIGHT

$V_{DD}-V_o$: LCD DRIVING VOLTAGE
 V_R : 10K Ω —20K Ω



BLOCK DIAGRAM 10 x 4, 1/16 DUTY, 1/5 BIAS

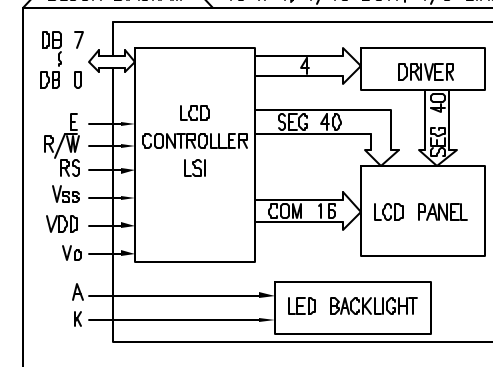

ELECTRICAL CHARACTERISTICS

 $V_{DD}=4.7V$ to $5.3V$, $T_A=25^\circ C$

ITEM	SYMBOL	CONDITION	STANDARD VALUE			UNIT
			MIN.	TYP.	MAX.	
SUPPLY VOLTAGE FOR LOGIC	$V_{DD}-V_{SS}$	-	-	5.0	-	V
SUPPLY CURRENT FOR LOGIC	I_{DD}	$V_{DD}=5V$	-	2.0	3.0	mA
INPUT VOLTAGE	HIGH	V_{IH}	-	2.2	-	V_{DD}
	LOW	V_{IL}	-	0	-	0.6
OUTPUT VOLTAGE	HIGH	V_{OH}	-	2.4	-	V
	LOW	V_{OL}	-	-	0.4	V
*LED BACKLIGHT	VOLTAGE	V_f	$I_f=160mA$	-	4.2	4.5
	CURRENT	I_f	-	-	260	400
	POWER CONSUMPTION	PD	-	-	672	mW
	LUMINOUS	L	$I_f=160mA$	70	-	cd/m ²
	COLOR	-	-	-	-	nm

*ONLY APPLIES TO MODULES WITH BACKLIGHT

ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	TEST CONDITION	STANDARD VALUE		UNIT
			MIN	MAX	
SUPPLY VOLTAGE FOR LOGIC	$V_{DD}-V_{SS}$	$T_a=25^\circ C$	4.7	5.3	V
SUPPLY VOLTAGE FOR LCD DRIVE	$V_{DD}-V_o$	-	4.2@50°C	4.8@0°C	V
INPUT VOLTAGE	V_i	$T_a=25^\circ C$	V_{SS}	V_{DD}	V
OPERATING TEMPERATURE	T_{opr}	LCM-S	0	50	°C
		LCM-H	-20	70	°C
STORAGE TEMPERATURE	T_{stg}	LCM-S	-20	70	°C
		LCM-H	-30	85	°C

UNCONTROLLED DOCUMENT

REV.

PART NUMBER
LCM-X01004DXX

CONFIDENTIAL INFORMATION
 THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
 OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
 INCORPORATED

290 E. HELLEN ROAD
 PALATINE, ILLINOIS 60067
 PHONE: 1-847-359-2790
 WEB: HTTP://WWW.LUMEX.COM

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 2-18-99

PAGE: 2 OF 2

SCALE: N/A

4.75mm TALL, 5 x 8 DOT MATRIX,

10 x 4 CHARACTER LCD MODULE, 1/16 DUTY, 1/5 BIAS.

SA/DU