

LDC-M5647RI-USB/RA

CAUTION: STATIC SENSITIVE DEVICE FOLLOW PROPER E.S.D. HANDLING PROCEDURES WHEN WORKING WITH THIS PART.

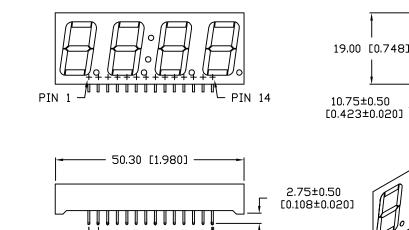

- 33.02 [1.300]

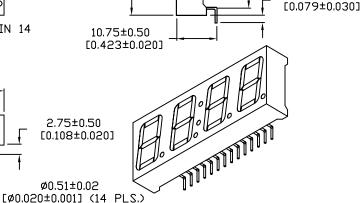

17.12 [0.674]

2.00±0.75

8.00 [0.315] -


COMMON ANODE																			
12					9			13	13		8	8			6				
DIG 1				DIG 2			Î	Î		DIG 3			DIG 4						
A E	Y :	-		l	1	QP V S	A B C	D E	F G	DP (- 1] A [Y Y	B C D	E F	- G [ι -		A B C D	E F	G DP Y Y Y
		\vdash	E	F	F			$\pm \pm$					-						
				Н					\perp							1]
						Η,			•	4						\Rightarrow			
ļ	ļ	ļ	ļ	ļ	ļ	ļ,	•				ļ	_							
11	7	4	2	1 1	0	5 3	i				14	ļ							

ELECTRO-OPTICAL C	HARACTERI	STICS TA=25°	.c	If=10mA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		470		nm	
FORWARD VOLTAGE		3.5	4.0	V_{f}	
REVERSE VOLTAGE	5.0			V_{r}	Ir=100µA
AXIAL INTENSITY		33000		μcd	$I_f = 10mA$
EMITTED COLOR:	BLUE				
FACE COLOR:	GRAY				
SEGMENT COLOR:	MILKY \	WHITE DIFFUS	ED		

LIMITS OF SAFE OPERATION AT 25°C PER CHIP	LIMITS	0F	SAFE	OPERATION	ΑT	25°C	PER CHIP	
---	--------	----	------	-----------	----	------	----------	--

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	80	mA
STEADY CURRENT	20	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING TEMP.	-25 TO +85	•C
STORAGE TEMP.	$-30\ T0\ +85$	•C
SOLDERING TEMP.	+ 260	• C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS

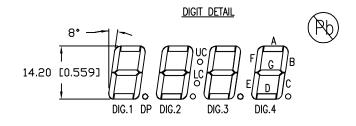

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.000), X.XX=±0.127 (±0.000). LEAD SIZE=±0.05 (±0.000), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.000), X.XX=±0.127 (±0.000). LEAD SIZE=±0.05 (±0.000), LEAD LENGTH=±0.75 (±0.000), MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.000), X.XX=±0.127 (±0.000). LEAD SIZE=±0.05 (±0.000), LEAD LENGTH=±0.75 (±0.000), MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.000), X.XX=±0.127 (±0.000), X.XX=±0.12

REV.

2.54 [0.100] (13 PLS.)

> PART NUMBER LDC-M5647RI-USB/RA

0.56" QUAD DIGIT, SEVEN SEGMENT, LED CLOCK DISPLAY, 470nm BLUE CHIPS, GRAY FACE WITH WHITE SEGMENTS, COMMON ANODE, 14 PINS, MULTIPLEXED, RIGHT ANGLE MOUNT. CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

CHECKED BY: APPROVED BY: DATE: 09.24.09 DRAWN BY: PAGE: 1 OF 1 SCALE: N/A JN