


PART NUMBER	REV.
LDD-AA10xRI	

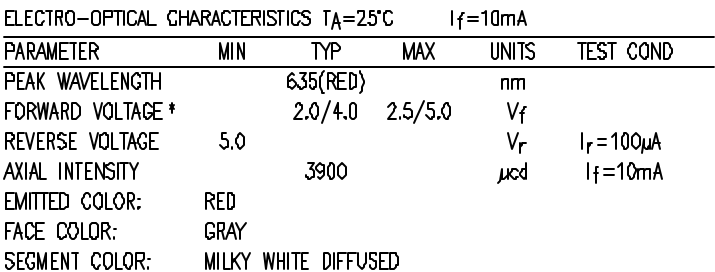

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	°C
SOLDERING TEMP.	+ 260	°C
2.0mm FROM BODY		3 SEC. MAX

COMMON ANODE

DIG.1

DIG.2

A B C D E F G DP A B C D E F G DP

16 14 1 3 2 15 17 18 11 13 8 6 7 12 10 9

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: $X \pm 0.1$ (± 0.039), $XX \pm 0.5$ (± 0.020), $XXX \pm 0.25$ (± 0.010), $XXXX \pm 0.127$ (± 0.005). LEAD SIZE ± 0.05 (± 0.002), LEAD LENGTH ± 0.75 (± 0.030). MIN. = +DECIMAL PRECISION
-0.00 -DECIMAL PRECISION

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

PAGE: 1 OF 1
SCALE: N/A