


UNCONTROLLED DOCUMENT


PIN 1

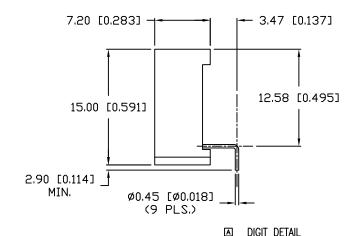




PIN 9







PART NUMBER

LDD-E302NI-RA-SUG

DATE

REV.

E.C.N. NUMBER AND REVISION COMMENTS E.C.N. #11424. 6.26.07

ELECTRO-OPTICAL	CHARACTERIS	TICS TA=25	5.C	$I_f = 10 \text{mA}$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		574		nm	
FORWARD VOLTAGE		2.2	2.6	V_{f}	
REVERSE VOLTAGE	5.0			V_{r}	Ir=100µA
AXIAL INTENSITY		7000		μcd	$I_f = 10mA$
EMITTED COLOR:	GREEN				
FACE COLOR:	GRAY				
SEGMENT COLOR:	MILKY W	HITE DIFFUS	SED		

LIMITS OF SAFE OPERATION AT 25°C PER CHIPS

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.6	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	•C
SOLDERING TEMP.	+ 260	•C
2.0mm FROM BODY		3 SEC. MAX
* L 440 C		·

* t<10µS

UNCONTROLLED DOC

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.XX=±0.5 (±0.020), X.XXX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION

REV. PART NUMBER LDD-F302NI-RA-SUG

0.30" SEVEN SEGMENT, DUAL DIGIT, LED DISPLAY, 574nm GREEN CHIPS, GRAY FACE WITH WHITE SEGMENTS, MULTIPLEXED, COMMON ANODE, RIGHT ANGLE LEADS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

ITW WEB: www.lumex.com.tw

CHECKED BY: APPROVED BY: DATE: DRAWN BY:

10.9.03 PAGE: 1 OF 1 SCALE: N/A