

UNCONTROLLED DOCUMENT

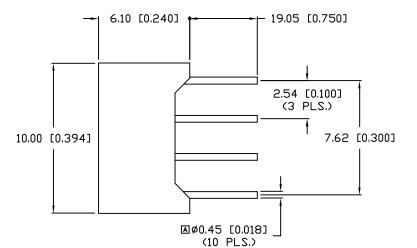

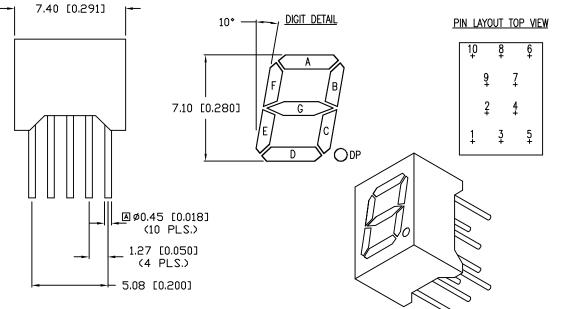

PART NUMBER

LDS-A2804RI-750

REV.

E.C.N. NUMBER AND REVISION COMMENTS DATE E.C.N. #11601. 12.10.09


ELECTRO-OPTICAL CHARACTERISTICS TA=25°C I_f=10mA

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		636		nm	
FORWARD VOLTAGE		2.0	2.5	۷f	
REVERSE VOLTAGE	5.0			V_r	Ir=100µA
AXIAL INTENSITY		5600		μcd	$I_f = 10 \text{mA}$
EMITTED COLOR:	RED				
FACE COLOR:	GRAY				
SEGMENT COLOR:	MILKY W	HITE DIFFUS	SED		

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING, STORAGE TEMP.	-30 TO +85	°C
SOLDERING TEMP.	+ 260	•C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS



*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.XX=±0.5 (±0.020), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005).

REV.

PART NUMBER LDS-A2804RI-750

0.28" SINGLE DIGIT, SEVEN SEGMENT LED DISPLAY, 636nm RED LEDS, GRAY FACE WITH WHITE SEGMENTS, COMMON ANODE, ROUND PINS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

JS WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: VA/DU

CHECKED BY: APPROVED BY: DATE: 11.16.99

PAGE: 1 OF 1 SCALE: N/A