

UNCONTROLLED DOCUMENT

PART NUMBER LDS-A2806RI REV.

E.C.N. NUMBER AND REVISION COMMENTS DATE E.C.N. #11601. 12.10.09

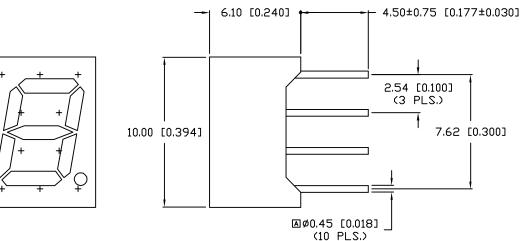


| ELECTRO-OPTICAL (| CHARACTER | RISTICS TA=2 | 5°C | $I_{f}=10mA$ | |
|-------------------|-----------|--------------|-----|--------------|--------------|
| PARAMETER | MIN | TYP | MAX | UNITS | TEST COND |
| PEAK WAVELENGTH | | 660 | | nm | |
| FORWARD VOLTAGE | | 1.7 | 2.2 | V_{f} | |
| REVERSE VOLTAGE | 5.0 | | | V_{r} | Ir=100µA |
| AXIAL INTENSITY | | 8000 | | μcd | $I_f = 10mA$ |
| EMITTED COLOR: | RED | | | | |
| FACE COLOR: | GRAY | | | | |
| SEGMENT COLOR: | MILKY | WHITE DIFFU | SED | | |

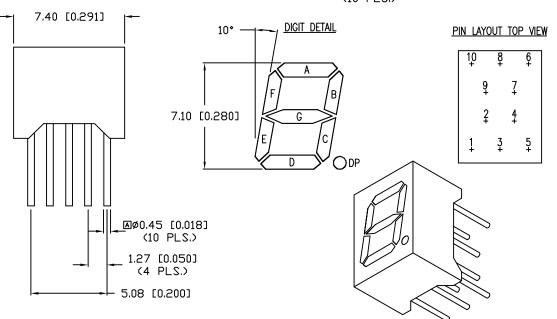

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

| PARAMETER | MAX | UNITS |
|--------------------------|------------|------------|
| PEAK FORWARD CURRENT* | 150 | mA |
| STEADY CURRENT | 30 | mA |
| POWER DISSIPATION | 105 | mW |
| DERATE FROM 25°C | - 1.2 | mW/°C |
| OPERATING, STORAGE TEMP. | -30 TO +85 | •C |
| SOLDERING TEMP. | + 260 | . C |
| 2.0mm FROM BODY | | 3 SEC. MAX |

* t<10µS



*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.XX=±0.5 (±0.020), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005).

REV.

PART NUMBER LDS-A2806RI

0.28" SINGLE DIGIT, SEVEN SEGMENT LED DISPLAY, 585nm YELLOW LEDS, GRAY FACE WITH WHITE SEGMENTS, COMMON ANODE, ROUND PINS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



CT

290 E. HELEN ROAD PALATINE, IL 60067–6976 PHONE: +1.847.359.2790

JS WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY: APPROVED BY: DATE: 09.19.02 PAGE: 1 OF 1

SCALE: N/A