


LIMITS OF SAFE OPERATION AT 25°C PER SEGMENT		
PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	60	mA
STEADY CURRENT	15	mA
POWER DISSIPATION	60	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING, STORAGE TEMP.	-25 TO +85	°C
SOLDERING TEMP.	+260	°C
2.0mm FROM BODY		3 SEC. MAX

* $t < 10\mu\text{S}$

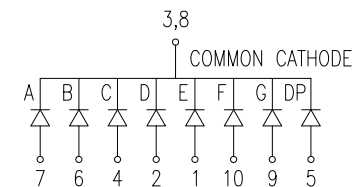

 425 N. GARY AVE. CAROL STREAM, IL 60188-4900 PHONE: +1.800.278.5666 FAX: +1.630.315.2152 WEB: WWW.LUMEX.COM MEMBER OF ITW PHOTONICS GROUP	0.28" SINGLE DIG,7 SEG LED DISP,636nm RED,GRAY FACE W/WHITE SEG,COMMON CATH,LOW CURRENT OPERATION.	DATE: 03.07.13	DRAWN BY: MA
	THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.	PAGE: 1 OF 1	CHKD BY: KF
	<u>CONFIDENTIAL INFORMATION</u> THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.	SCALE: NTS	APRVD BY: KF
		UNIT: mm [INCH]	(R0)