


PART NUMBER	LDS-C813RI-SY	REV.	В
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
10.24.07	E.C.N. #11451.		Α
01.02.13	E.C.N. #10BRDR. & REDRAWN.	·	В



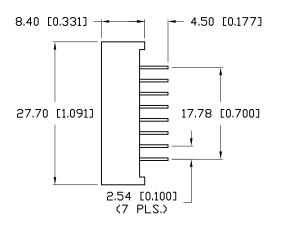

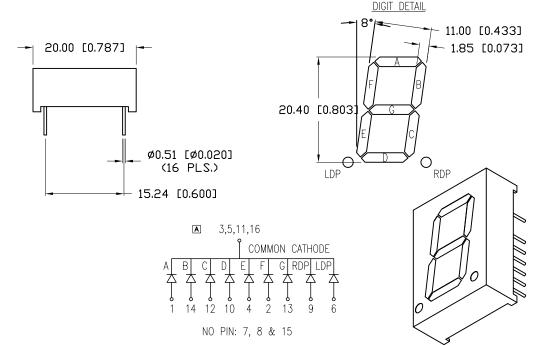

ELECTRO-OPTICAL C	HARACTERIST	TCS TA=25	5°C	$I_f=10mA$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		590		nm	
FORWARD VOLTAGE		2.0	2.5	V_f	
REVERSE VOLTAGE	5.0			V_r	I _r =100μΑ
AXIAL INTENSITY		15000		μcd	$I_f = 10mA$
EMITTED COLOR:	YELLOW				
FACE COLOR:	GRAY				
SEGMENT COLOR:	MILKY WE	HTE DIFFUS	SED		

LIMITS OF SAFE OPERATION AT 25°C PER SEGMENT

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.6	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	•C
SOLDERING TEMP.	+ 260	. C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS

CAUTION: STATIC SENSITIVE DEVICE FOLLOW PROPER E.S.D. HANDLING PROCEDURES WHEN WORKING WITH THIS PART.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.002), X.XX=±0.127 (±0.005).



MEMBER OF ITW PHOTONICS GROUP

0.80" SEVEN SEG, LED DISPLAY, 590nm YELLOW CHIPS, GRAY FACE W/ WHITE SEG, COMMON CATHODE, 16 PINS

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

N	UNC	ONTRO	DZZ	ED DOCUM	MENT
S.	DATE:	01.02.1	3	DRAWN BY:	MA
_	PAGE:	1 OF	1	CHKD BY:	SS
	SCALE:	NTS		APRVD BY:	SS
	UNIT:	mm [INC	H]	P	

