



PART NUMBER	LDS-SMA2014RI-SITR	REV	A

REV	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	ECN-Lumex202600031	10.23.26

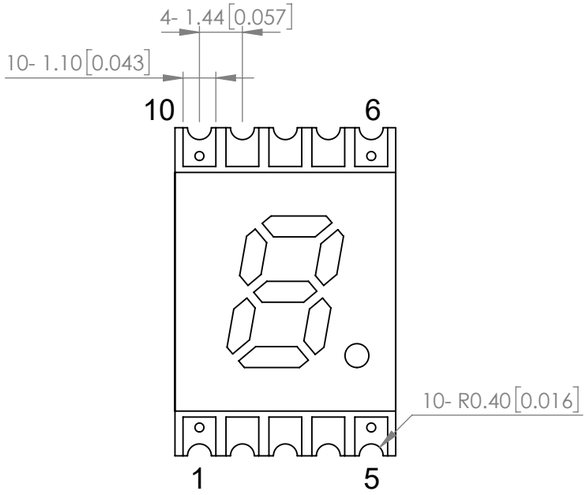


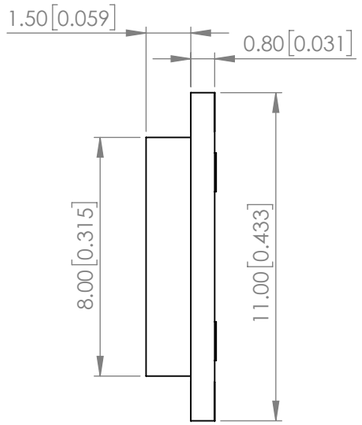






CIRCUIT DIAGRAM

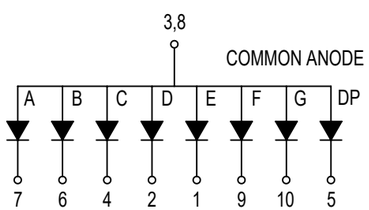

RECOMMANDED SOLDER PAD

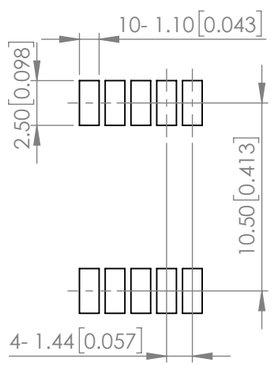

ELECTRO-OPTICAL CHARACTERISTIC TA=25℃ PER SEGMENT

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	-	640	-	nm	If=20mA
FORWARD VOLTAGE	-	2.1	2.4	Vf	If=20mA
REVERSE CURRENT	-	-	100	uA	V_R=5V
LUMINOUS INTENSITY	-	22000	-	ucd	If=20mA
EMITTED COLOR	RED				
FONT COLOR	GRAY				
SEGMENT COLOR	MILKY WHITE DIFFUSED				

ABSOLUTE MAXIMUM RATINGS TA=25℃ PER SEGMENT

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	40	mA
FORWARD CURRENT	20	mA
POWER DISSIPATION	50	mW
REVERSE VOLTAGE	5	V
STORAGE TEMPERATURE	-40 TO +105	℃
OPERATING TEMPERATURE	-40 TO +105	℃

* 1/10 DUTY,1KHz

MOISTURE SENSITIVE DEVICE
PER JEDEC LEVEL 2a STANDARDS

STATIC DEVICE FOLLOW PROPER
E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+\text{DECIMAL PRECISION}}_{-0.00}$ MAX.= $^{+0.00}_{-\text{DECIMAL PRECISION}}$

ITW LUMEX
Creating LED · LCD & Switch Solutions
2325. KENYON ROAD.
BARTLETT, IL 60103
PHONE : 800-278-5666
FAX : 630-315-2150
WEB : WWW.LUMEX.COM

0.20" SINGLE DIGIT, SURFACE MOUNT SEVEN SEGMENT LED DISPLAY, 640nm RED CHIPS, GRAY FACE WITH WHITE SEGMENTS ,COMMON ANODE.

****THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE.****


CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.


DATE : 2026.10.22	DRAWN BY : E.C.
PAGE : 1 OF 2	CHKD BY : T.S.
SCALE : NTF	APRVD BY : G.Y
UNIT : mm [INCH]	Pb

PART NUMBER	LDS-SMA2014RI-SITR	REV	A

PROFILE

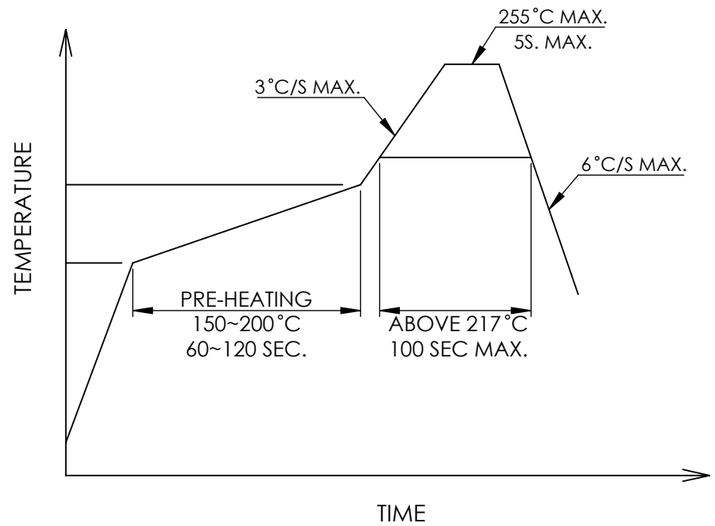

CARRIER TAPE DIMENSION

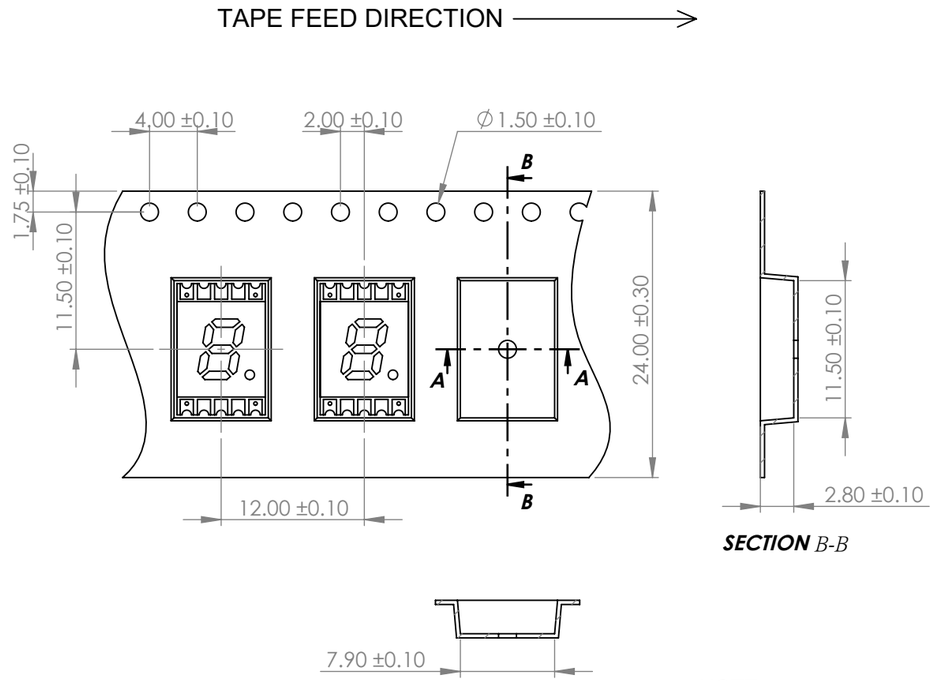

NOTE:
1.PACKING : 1500pcs/RELL

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+\text{DECIMAL PRECISION}}_{-0.00}$ MAX.= $^{+0.00}_{-\text{DECIMAL PRECISION}}$

ITW LUMEX
Creating LED · LCD & Switch Solutions
2325. KENYON ROAD.
BARTLETT, IL 60103
PHONE : 800-278-5666
FAX : 630-315-2150
WEB : WWW.LUMEX.COM

0.20" SINGLE DIGIT, SURFACE MOUNT SEVEN SEGMENT LED DISPLAY, 640nm RED CHIPS, GRAY FACE WITH WHITE SEGMENTS ,COMMON ANODE.

****THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE.****

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE : 2026.10.22	DRAWN BY : E.C.
PAGE : 2 OF 2	CHKD BY : T.S.
SCALE : NTF	APRVD BY : G.Y
UNIT : mm [INCH]	Pb