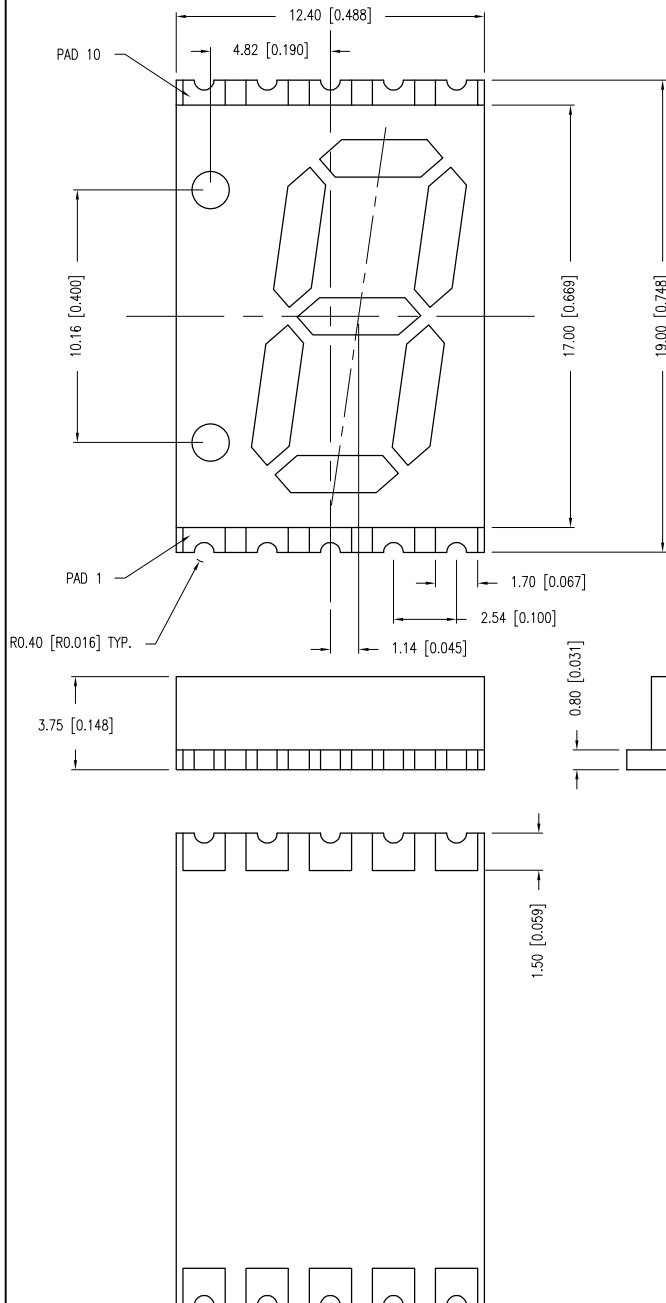
ELECTRO-OPTICAL CHARACTERISTICS $T_A=25^\circ\text{C}$ $I_f=20\text{mA}$

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	569	572	573	nm	
FORWARD VOLTAGE		2.2	2.6	V_f	
REVERSE VOLTAGE	5.0			V_r	$I_r=100\mu\text{A}$
AXIAL INTENSITY	32000	35000	39000	ucd	$I_f=10\text{mA}$
EMITTED COLOR:	GREEN				
FACE COLOR:	GRAY				
EPOXY LENS FINISH:	WHITE DIFFUSED				


LIMITS OF SAFE OPERATION AT 25°C PER DIE

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	100	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	65	mW
CURRENT DERATE $T_a \geq 25^\circ\text{C}$	0.33	mA/ $^\circ\text{C}$
OPERATING TEMP.	-40 TO +95	$^\circ\text{C}$
STORAGE TEMP.	-40 TO +95	$^\circ\text{C}$



* $t \leq 10\mu\text{s}$ CAUTION: MOISTURE SENSITIVE DEVICE
PER JEDEC LEVEL 2A STANDARDS

NOTES:

1. LED DIE # LXP-GYU907CT. ANY CHANGES TO MATERIAL PROCESS ETC WILL COMPLY TO THE LATEST AVAILABLE REVISION OF THE WATLOW SUPPLIER REQUIREMENTS MANUAL, MAN-7.4.03.



RECOMMENDED SOLDER PAD LAYOUT



*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION MAX.= -DECIMAL PRECISION

UNCONTROLLED DOCUMENT




290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

.56" CUSTOM SMD LED DISPLAY, SINGLE DIGIT, 574nm GREEN AlInGaP, GRAY FACE, WHITE SEGMENTS, 1K PER REEL


THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.


DATE:	01.31.11	DRAWN BY:	AB
PAGE:	1 OF 3	CHKD BY:	--
SCALE:	NTS	APRVD BY:	YA
UNIT:	mm [INCH]		(Pb)

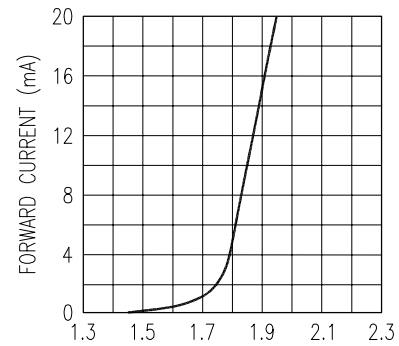


FORWARD VOLTAGE (V)
FORWARD CURRENT vs. FORWARD VOLTAGE

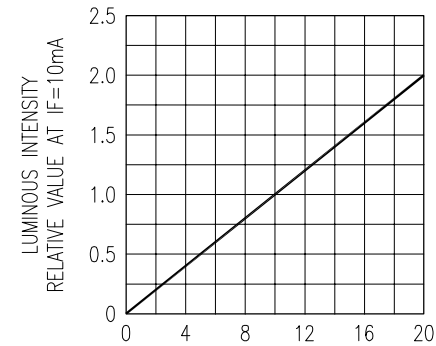

IF-FORWARD CURRENT (mA)
LUMINOUS INTENSITY vs.
FORWARD CURRENT

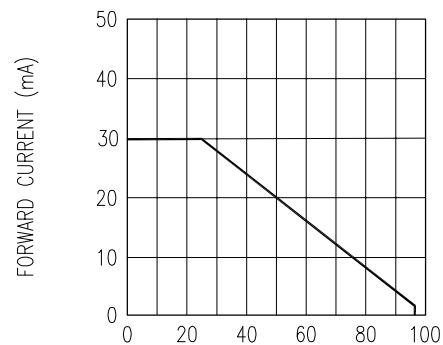

AMBIENT TEMPERATURE Ta(°C)
FORWARD CURRENT DERATING
CURVE

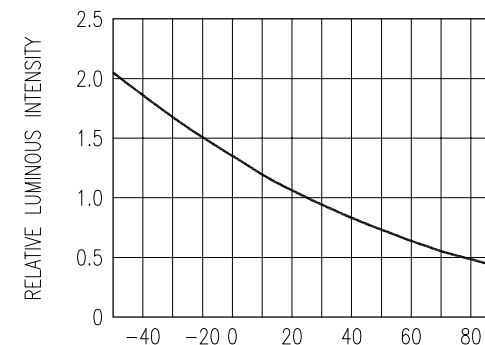

AMBIENT TEMPERATURE Ta(°C)
LUMINOUS INTENSITY vs.
AMBIENT TEMPERATURE

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=^{+0.00}_{-0.00} DECIMAL PRECISION MAX.=^{+0.00}_{-0.00} DECIMAL PRECISION

UNCONTROLLED DOCUMENT




290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

.56" CUSTOM SMD LED DISPLAY, SINGLE DIGIT, 574nm GREEN AlInGaP, GRAY FACE, WHITE SEGMENTS, 1K PER REEL

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.


CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL
KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	01.31.11	DRAWN BY:	AB
PAGE:	2 OF 3	CHKD BY:	--
SCALE:	NTS	APRVD BY:	YA
UNIT:	mm [INCH]		Ⓟ

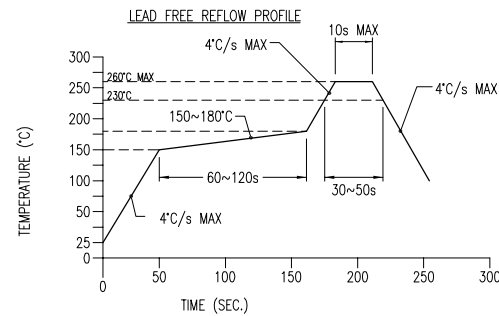

NOTES:

1. RECOMMENDED REFLOW TEMPERATURE OF 245°C(±5°). THE MAXIMUM SOLDERING TEMPERATURE SHOULD BE LIMITED TO 260°C.
2. PLEASE DO NOT CAUSE STRESS TO THE EPOXY RESIN WHILE IT IS EXPOSED TO HIGH TEMPERATURE. NUMBER OF REFLOW PROCESS SHALL BE 2 TIMES OR LESS.

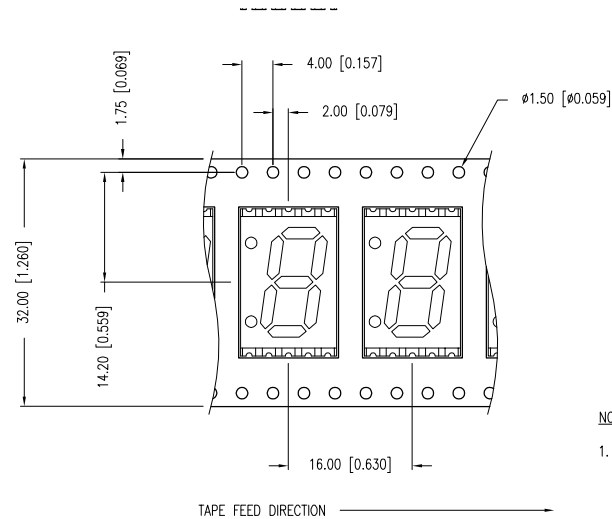

NOTES:

1. 1K PER REEL

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $\begin{matrix} +\text{DECIMAL PRECISION} \\ -0.00 \end{matrix}$ MAX.= $\begin{matrix} +0.00 \\ -\text{DECIMAL PRECISION} \end{matrix}$

UNCONTROLLED DOCUMENT

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.