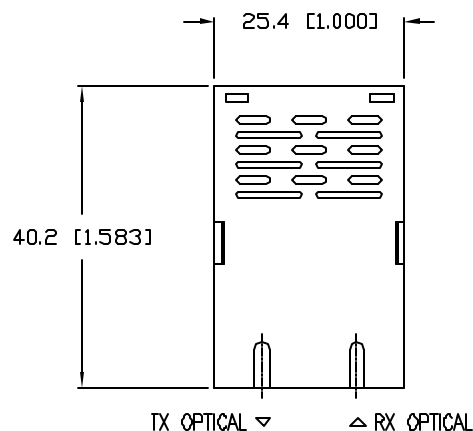


UNCONTROLLED DOCUMENT

PART NUMBER		REV.
LLD-IT13125050SSC		A
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	01.24.07

WARNING
INVISIBLE LASER RADIATION,
AVOID DIRECT EXPOSURE TO BEAM.

**LASER SAFETY**

This single mode transceiver is a Class 1 laser product. It complies with IEC 825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.




ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	MIN.	MAX.	UNITS
POWER SUPPLY VOLTAGE	Vcc	0	6	V
INPUT VOLTAGE	-	GND	Vcc	V
OUTPUT CURRENT	Iout	0	30	mA
SOLDERING TEMPERATURE*	-		240	°C
OPERATING TEMPERATURE	Topr	0	70	°C
STORAGE TEMPERATURE	Tstg	-40	85	°C

* 10 SEC. ON LEADS ONLY

RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS
POWER SUPPLY VOLTAGE	Vcc	4.75	5	5.25	V
OPERATING TEMPERATURE	Topr	0		70	°C
DATA RATE			1250		Mbit/s

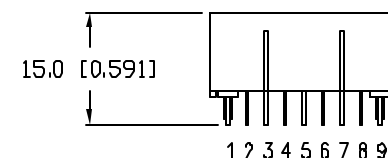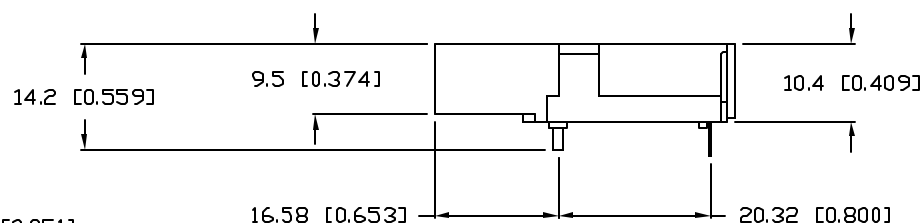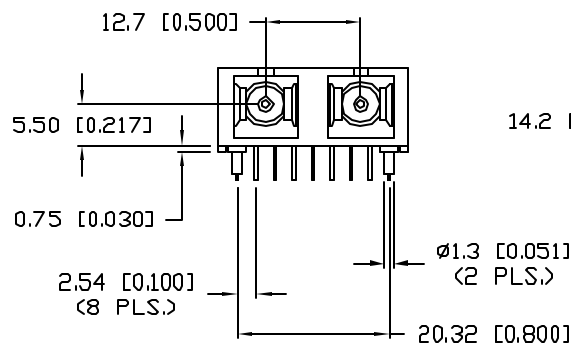

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+DECIMAL PRECISION -0.00 MAX.=+0.00 -DECIMAL PRECISION

REV.	PART NUMBER
A	LLD-IT13125050SSC

1310nm-1.25Gbps SINGLE MODE TRANSCEIVER.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.


RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED BY:	APPROVED BY:
JC		
DATE:	3.27.00	
PAGE:	1 OF 1	
SCALE:	N/A	

RECOMMENDED CIRCUIT SCHEMATIC

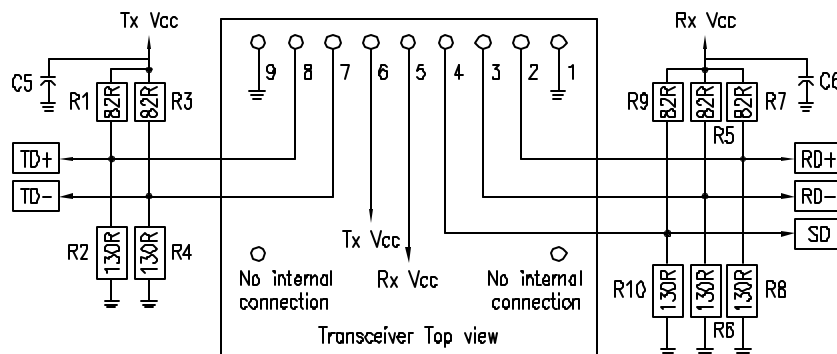

NOTES:

R1=R3=R5=R7=R9=82Ω
R2=R4=R6=R8=R10=130Ω
C1=C2=C3=C5=C6=0.1μF
C4=10μF
L1=L2=1μH

The split-load terminations for ECL signals need to be located at the input of devices receiving those ECL signals. The power supply filtering is required for good EMI performance. Use short traces from the inductor L1/L2 to the module Rx Vcc and Tx Vcc. A ground plate under the module is required for good EMI and sensitivity performance.

CONNECTION DIAGRAM

Receiver Signal Ground	1. (Rx GND)	○
Receiver Data Out	2. (RD+)	N/C
Receiver Data Out Bar	3. (RD-)	
Signal Detect	4. (SD)	
Receiver Power Supply	5. (Rx Vcc)	TOP VIEW
Transmitter Power Supply	6. (Tx Vcc)	
Transmitter Data Out Bar	7. (TD-)	
Transmitter Data In	8. (TD+)	N/C
Transmitter Signal Ground	9. (Tx GND)	○

PIN	SYMBOL	NOTES:
1	Rx GND	Directly connect this pin to the receiver ground plate.
2	RD+	See recommended circuit schematic.
3	RD-	See recommended circuit schematic.
4	SD	Active high on this indicates a received optical signal.
5	Rx Vcc	+5v dc power for the receiver section.
6	Tx Vcc	+5v dc power for the transmitter section.
7	TD-	See recommended circuit schematic.
8	TD+	See recommended circuit schematic.
9	Tx GND	Directly connect this pin to the transmitter ground plate.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

REV.

PART NUMBER

A

LLD-IT13125050SSC

1310nm-1.25Gbps SINGLE MODE TRANSCIVER.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 3.27.00

JG

PAGE: 1 OF 2

SCALE: N/A

TRANSMITTER SPECIFICATIONS (0°C<T_{opr}<70°C, 4.75V<V_{cc}<5.25V)

	PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES:
OPTICAL	OPTICAL TRANSMIT POWER	P _o	-11	---	-6	dBm	(1)
	OUTPUT CENTER WAVELENGTH	λ	1274	1310	1355	nm	
	OUTPUT SPECTRUM WIDTH	$\Delta\lambda$	---	---	4	nm	RMS
	EXTINCTION RATIO	E _R	8.2	---	---	dB	
	RELATIVE INTENSITY NOISE	RIN			-120	dB/Hz	
	OPTICAL RISE TIME	t _r			0.26	ns	(2)
	OPTICAL FALL TIME	t _f			0.26	ns	(2)
ELECTRICAL	TOTAL JITTER	TJ			0.227	ns	(3)
	POWER SUPPLY CURRENT	I _{cc}			140	mA	(4)
	DATA INPUT CURRENT-LOW	I _{IL}	-350			μA	
	DATA INPUT CURRENT-HIGH	I _{IH}			350	μA	
	DIFFERENTIAL INPUT VOLTAGE	V _H -V _{IL}	300			mV	
	DATA INPUT VOLTAGE-LOW	V _{IL} -V _{cc}	-2.0		-1.58	V	(5)
	DATA INPUT VOLTAGE-HIGH	V _H -V _{cc}	-1.1		-0.74	V	(6)
NOTES	(1) Output power is coupled into a 9/125 μm single mode fiber.						
	(2) 20%-80% Values						
	(3) Measured with 2 ²³ -1 PRBS with 72 ones and 72 zeros. (ITU-T recommendation G.958)						
	(4) Maximum current is specified at V _{cc} = Maximum @maximum temperature.						
	(5) These inputs are compatible with 10K, 10KH, and 100KECL and PECL inputs.						
	(6) Minimum sensitivity and saturation levels for a 2 ²³ -1 PRBS with 72 ones and 72 zeros.						

RECEIVER SPECIFICATIONS (0°C<T_{opr}<70°C, 4.75V<V_{cc}<5.25V)

	PARAMETER		SYMBOL	MIN	TYP	MAX	UNITS	NOTES:
OPTICAL	SENSITIVITY		---	---	-22	-20	dBm	(1)
	MAXIMUM INPUT POWER		P _{in}	-3		---	dBm	
	SIGNAL DETECT-ASSERTED		P _a	---		-20	dBm	(2)
	SIGNAL DETECT-DEASSERTED		P _d	-35		---	dBm	(3)
	SIGNAL DETECT-HYSTERESIS				3.0		dB	
ELECTRICAL	WAVELENGTH OF OPERATION			1100		1600	nm	
	POWER SUPPLY CURRENT		I _{cc}			100	mA	(4)
	DATA OUPUT VOLTAGE-LOW		V _{OL} -V _{CC}	-2.0		-1.58	V	(5)
	DATA OUPUT VOLTAGE-HIGH		V _{OH} -V _{CC}	-1.1		-0.74	V	
	SIGNAL DETECT	LOW	V _{SDH} -V _{CC}	-2.0		-1.58	V	
	OUPUT VOLTAGE	HIGH	V _{SDL} -V _{CC}	-1.1		-0.74	V	
NOTES	(1) Measured with 2 ⁷ -1 PRBS							
	(2) Measured on transition: low to high.							
	(3) Measured on transition: high to low.							
	(4) The current excludes the output load current.							
	(5) These inputs are compatible with 10K, 10KH, and 100KECL and PECL inputs.							

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

REV.

PART NUMBER

A

LLD-IT13125050SSC

1310nm-1.25Gbps SINGLE MODE TRANSCIVER.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

JC

CHECKED BY:

APPROVED BY:

DATE: 3.27.00

PAGE: 1 OF 2

SCALE: N/A