


PART NUMBER


P3

LPF-C012103S

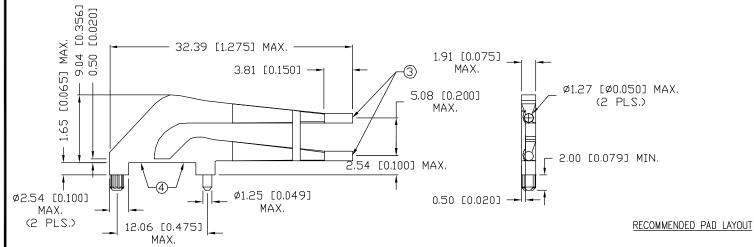





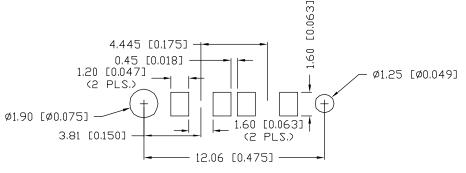

NOTES:

- 1. MATERIAL: CLEAR POLYCARBONATE UL94V-0
- 2. RECOMMENDED LED: SML-LXL1206 SERIES.
- 3. THE ENDS OF LIGHT PIPES ARE DIFFUSED.
- 4. POLISH SURFACE

JN

LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION *UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). 290 E, HELEN ROAD PART NUMBER

P3 LPF-C012103S DUAL LEVEL CUSTOM LIGHT PIPE,

1.27mm PIPE DIAMETER.

REV.

<u>CONFIDENTIAL INFORMATION</u>
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OF IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

TW WEB: www.lumex.com.tw APPROVED BY: DATE: 01.29.09 DRAWN BY: CHECKED BY:

PAGE: 1 OF 1 SCALE: N/A