

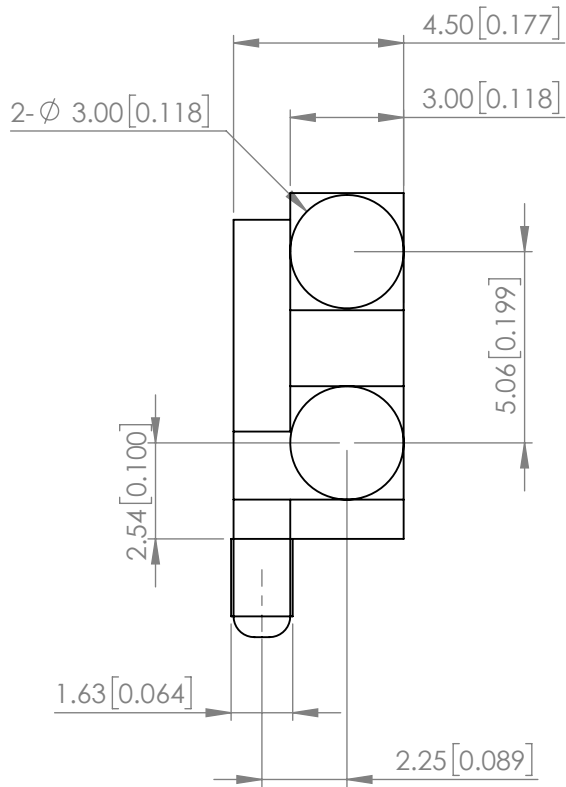


PART NUMBER		LPF-C012303S	REV	C
REV	E.C.N. NUMBER AND REVISION COMMENTS			DATE
A	E.C.N#11081			01.14.04
B	E.C.N#11211			01.28.05
C	ECN-Lumex202100010			04.06.21

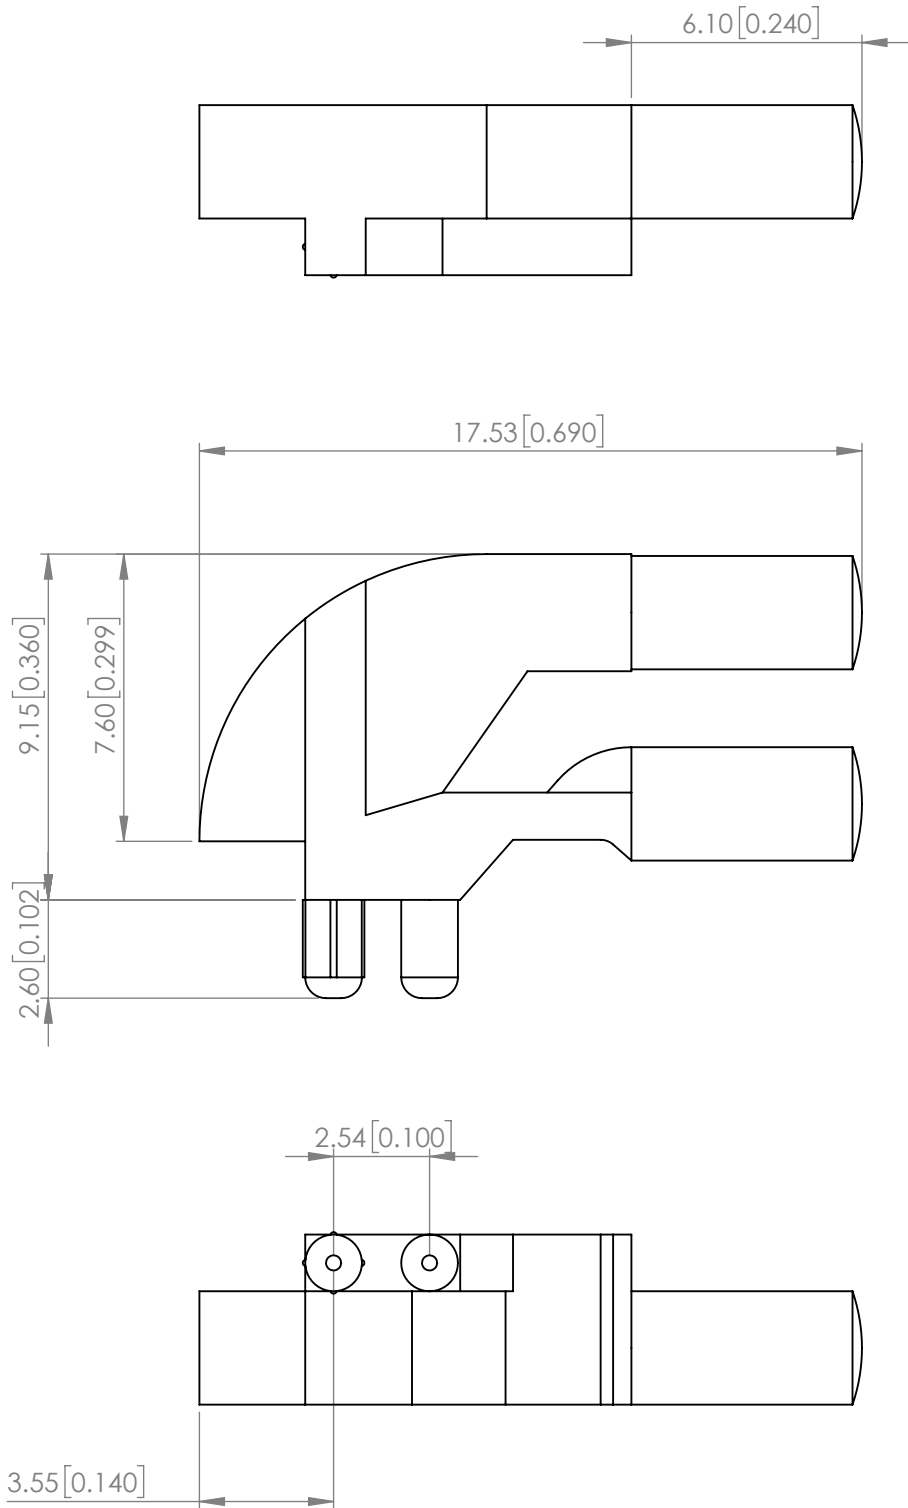

RECOMMENDED SOLDER PAD LAYOUT

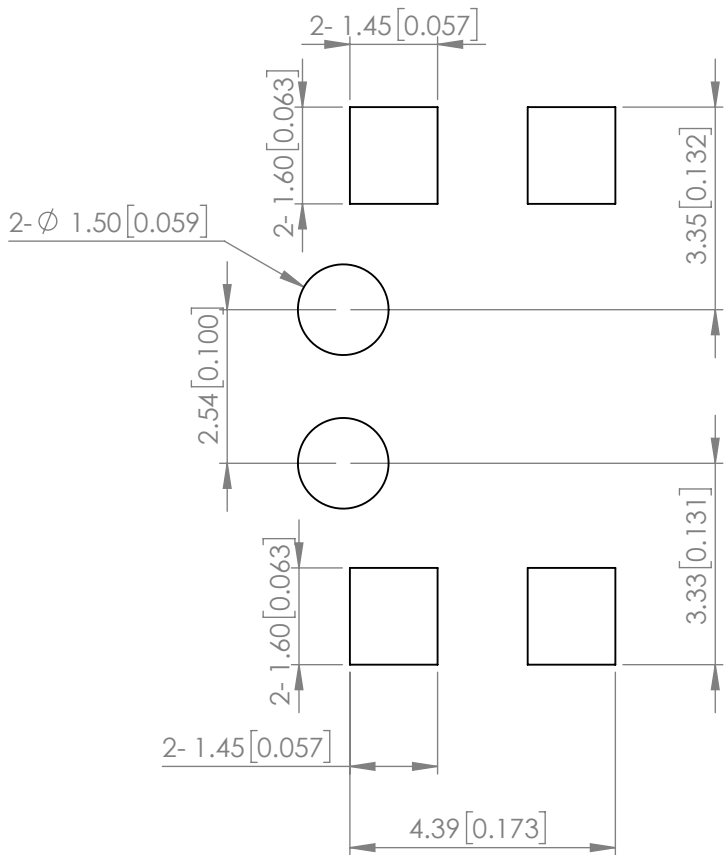

- NOTE:**
- 1.MATERIAL: CLEAR POLYCARBONATE, UL94V-0
 - 2.TEMP RANGE:-60°C TO+125°C
 - 3.RECOMMENDED LED:SML-LX23 SERIES

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+DECIMAL PRECISION}_{-0.00} MAX.= ^{+0.00}_{-DECIMAL PRECISION}



425 N. GARY AVE.
CAROL STREAM, IL 60188
PHONE : 800-278-5666
FAX : 630-315-2150
WEB : WWW.LUMEX.COM

3mm DAUL TOWER, RIGHT ANGLE BEND, SMT LIGHT PIPE

****THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE.****

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE : 2021.04.06

DRAWN BY : E.C.

PAGE : 1 OF 1

CHKD BY : E.C.

SCALE : NTF

APRVD BY : G.Y.

UNIT : mm [INCH]

