UNCONTROLLED DOCUMENT


SC:0.50


PART NUMBER

LPF-C103401S

REV.

PRELIMINARY IN P/N DIR

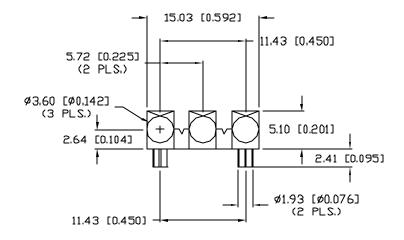

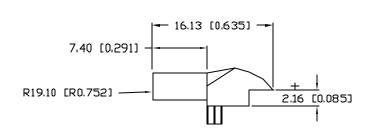

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN=+DECINAL PRECISION MAX.=+0.00 (±0.002), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005).

PART NUMBER
P1 LPF-C1034015

3 POSITION RIGHT ANGLE LIGHT PIPE.

Confidential information

The information contained in this document is the property of Lunex No. Except as specifically authorazed in Writing By Lunex inc., the holder of this document shall keep all information contained herein confidential and shall protect same in whole or in part from disclosure and dissemblation to all third parties.

RELIABLITY NOTE
OUR NAMY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT
SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



CT

290 E. HELEN ROAD
PALATINE, IL 60067—6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: API

APPROVED BY: DATE: 11.13.02 PAGE: 1 OF 1 SCALE: N/A