
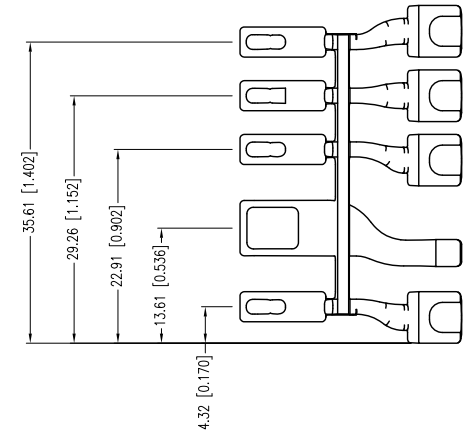
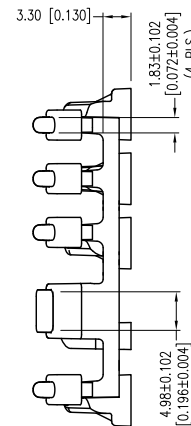
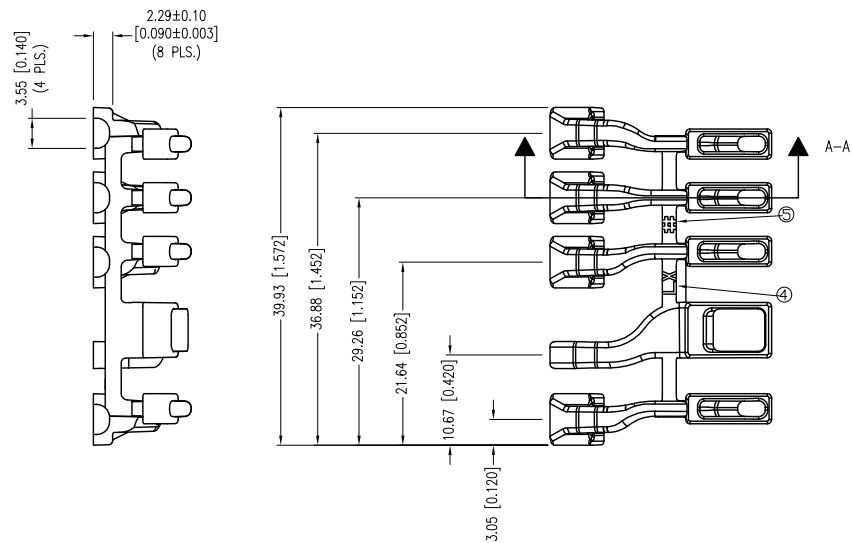
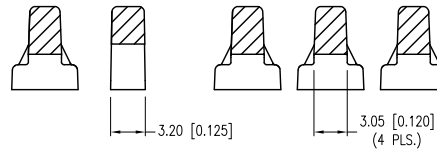


SECTION A-A

SECTION B-B

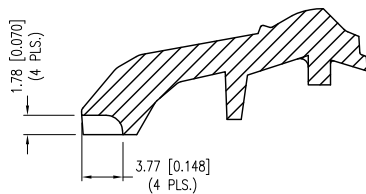

NOTES:

1. TEXTURE FINISH.
2. CLEAR FINISH.
3. LIGHTPIPE TO BE FREE FROM BUBBLES, FLASH, VESTIGES, SINK MARKS, AND MOLD IMPERFECTIONS.
4. "LX" MARKING.
5. MOLD/CAVITY # MARKING.
6. MATERIAL: CLEAR POLYCARBONATE, UL 94V-0.
7. NO UV STABILIZATION TO BE ADDED.
8. TOLERANCE FOR ALL OF DIMENSIONS IS ±0.15MM (0.006), UNLESS OTHERWISE SPECIFIED.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= ^{+DECIMAL PRECISION} -0.00 MAX.= ^{+DECIMAL PRECISION} -DECIMAL PRECISION

UNCONTROLLED DOCUMENT