


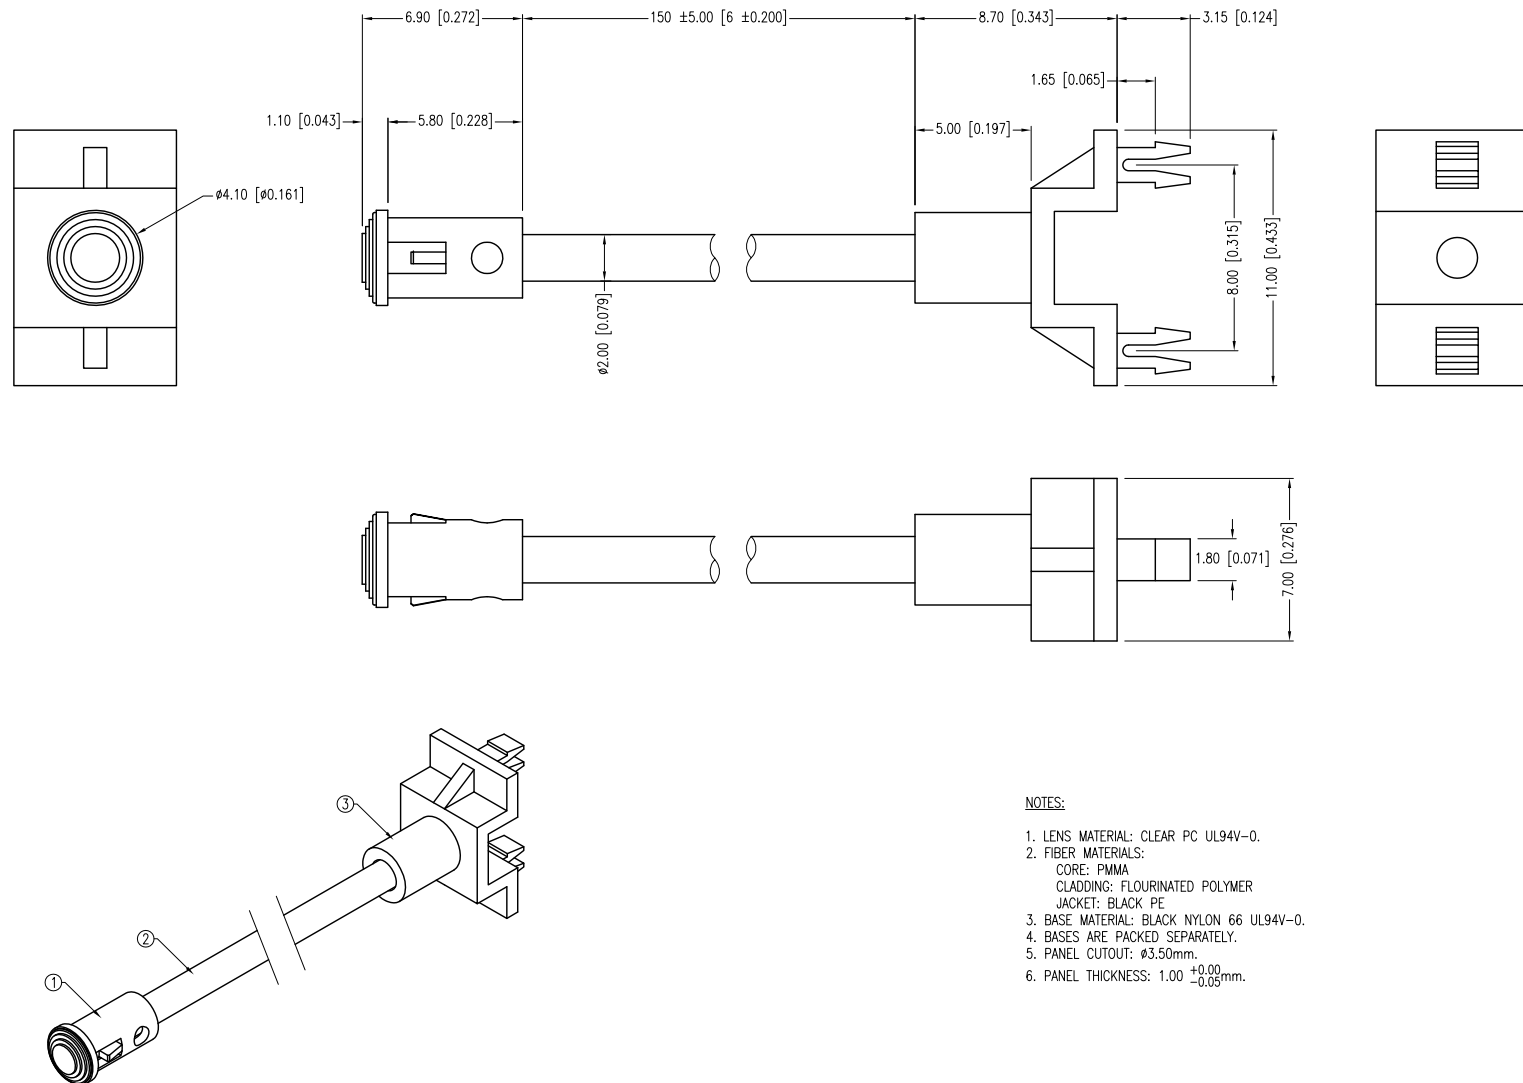

NOTES:

1. LENS MATERIAL: CLEAR PC UL94V-0.
2. FIBER MATERIALS:
CORE: PMMA
CLADDING: FLOURINATED POLYMER
JACKET: BLACK PE
3. BASE MATERIAL: BLACK NYLON 66 UL94V-0.
4. BASES ARE PACKED SEPARATELY.
5. PANEL CUTOUT: $\phi 3.50$ mm.
6. PANEL THICKNESS: 1.00 $\begin{smallmatrix} +0.09 \\ -0.09 \end{smallmatrix}$ mm.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= $\begin{smallmatrix} +0.00 \\ -0.00 \end{smallmatrix}$ DECIMAL PRECISION MAX.= $\begin{smallmatrix} +0.00 \\ -0.00 \end{smallmatrix}$ DECIMAL PRECISION

UNCONTROLLED DOCUMENT

LIGHT PIPE ASSEMBLY.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.