
SC:0.50

PART NUMBER

LPI-C01160TS-36

PRELIMINARY IN P/N DIR

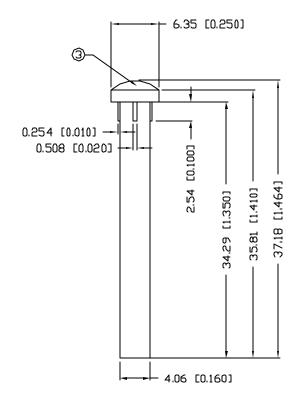

NOTES:

- 1. POLYCARBONATE, 94V-0, CLEAR.
- 2. LIGHTPIPE TO BE FREE OF BUBBLES.
- 3. END DIFFUSED.



REV.

UNCONTROLLED DOCUMENT **UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.0010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.0030). MN= +0.00 (±0.0030).

REV.

PART NUMBER LPI-C01160TS-36 Confidential information

The information contained in this document is the property of Lumex No., except as specifically authorized in writing by Lumex inc., the holder of this document shall keep all information contained herein confidential and shall protect same in whole or IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY: APPROVED BY:

DATE: 12.05.07 PAGE: 1 OF 1 SCALE: N/A