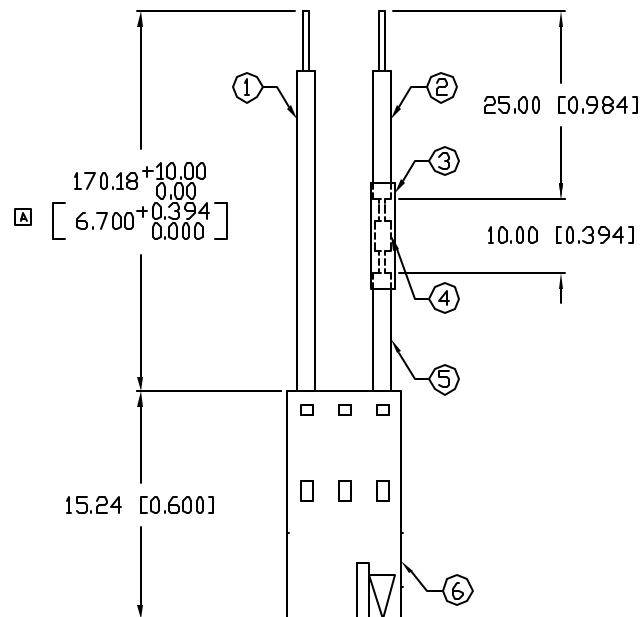
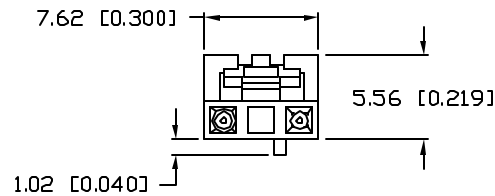


UNCONTROLLED DOCUMENT

PART NUMBER
LXP-LX509-ASSYREV.
B

NOTES:

- ② 1. CATHODE LEAD: 22 AWG., UL1569, BLACK INSULATION, CUT 185mm, TRIM ONE END 9mm, OTHER END MOLEX CRIMP TERMINAL SERIES #70058, P/N 16-02-0086.
2. ANODE LEAD: 22 AWG., UL1569, RED INSULATION, CUT 30mm, TRIM ENDS 9mm & 4.5mm.
3. VERSAFIT 1/8-0-SP RAYCHEM P/N 5058704033 600V 125°C HEATSHRINK TUBING.
- ④ 4. 180Ω, 1/4W RESISTOR, 1% TOLERANCE, TRIM LEADS SO THAT OVERALL LENGTH IS 10mm.
- ⑤ 5. ANODE LEAD: 22 AWG., UL1569, RED INSULATION, CUT 150mm, TRIM ONE END 4.5mm, OTHER END MOLEX CRIMP TERMINAL SERIES #70058, P/N 16-02-0086.
6. MOLEX CONNECTOR 50-57-9403.

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=^{+DECIMAL PRECISION}-0.00 MAX.=^{+0.00}-DECIMAL PRECISION

REV.

B

PART NUMBER

LXP-LX509-ASSY

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

④

WIRE HARNESS ASSEMBLY FOR SSA-LXH509 ASSEMBLY.

DRAWN BY:

BC

CHECKED BY:

APPROVED BY:

DATE: 7.1.04

PAGE: 1 OF 1

SCALE: N/A