


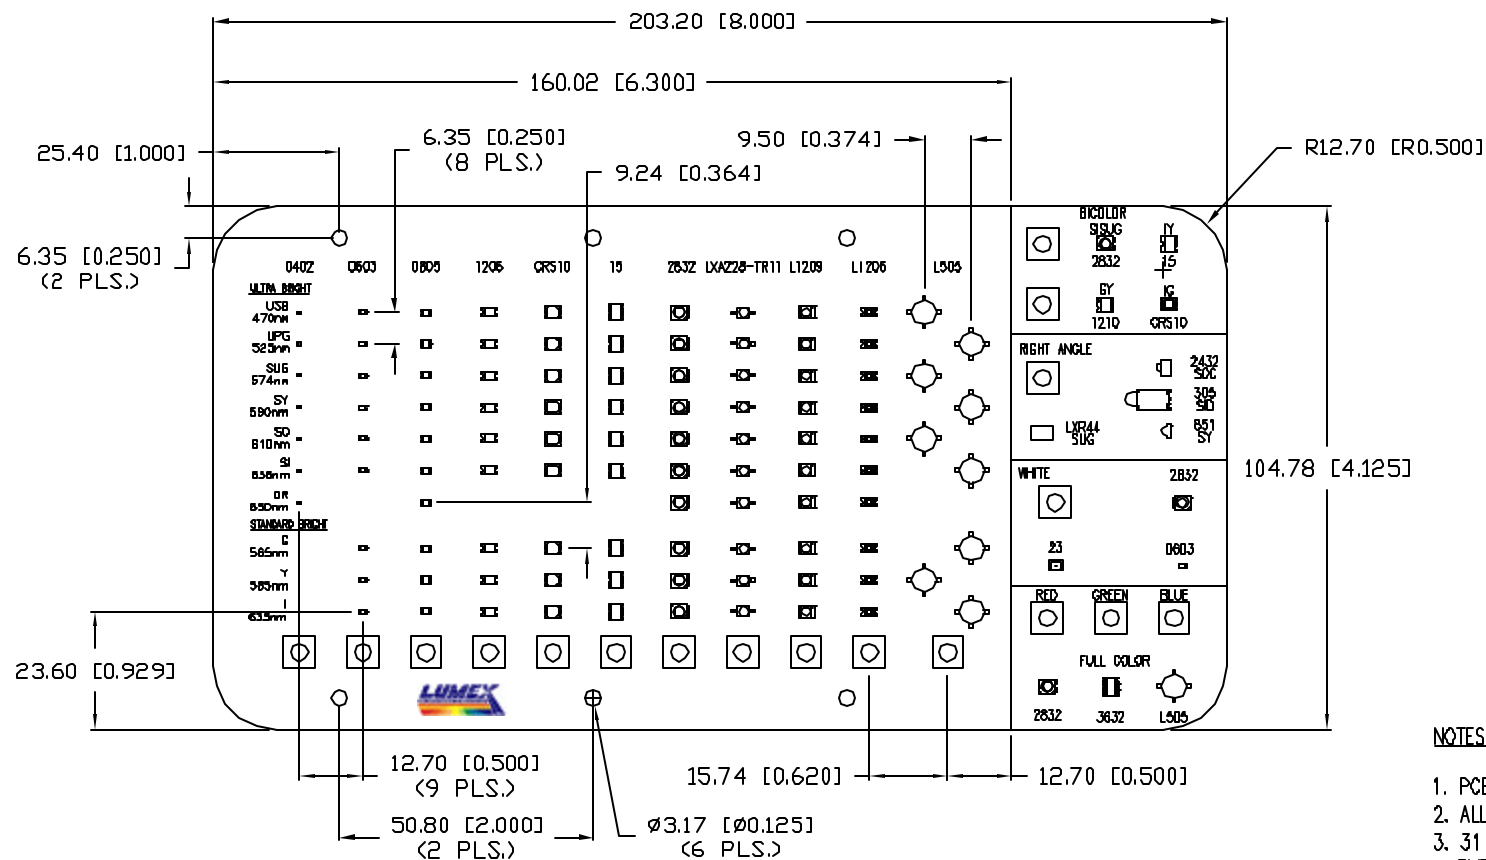

NOTES:

1. PCB TO BE BLACK MASKED.
2. ALL PARTS #'S & TEXT TO BE WHITE
3. 31 PCS. 1/4W 270 OHM
SMT 1206 RESISTOR.
4. 102 PCS. 1/4W 330 OHM
SMT 1206 RESISTOR.
5. 18 SMT SWITCHES (LXP-B35-100P)

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), W=±0.00, H=±0.00, DECIMAL PRECISION MAX.= ±0.00, DECIMAL PRECISION

REV.

PART NUMBER

LXP-SMD-ASSY

SMT DISPLAY BOX

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

BC

CHECKED BY:


APPROVED BY:

DATE: 5.21.02

PAGE: 1 OF 2

SCALE: N/A


FULL COLOR

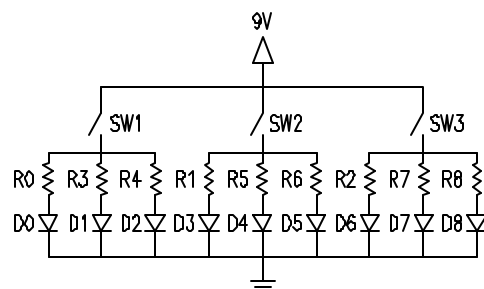

NOTES:

1. $R0 \sim R2 = 330\Omega$,
 $R3 \sim R8 = 270\Omega$.
2. D0 IS 2832 RED.
3. D1 IS 2832 GREEN.
4. D2 IS 2832 BLUE.
5. D3 IS 3632 RED.
6. D4 IS 3632 GREEN.
7. D5 IS 3632 BLUE.
8. D6 IS L505 RED.
9. D7 IS L505 GREEN.
10. D8 IS L505 BLUE.


BICOLOR

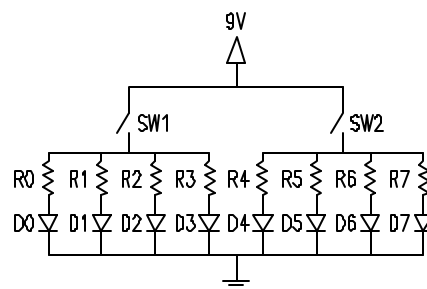

NOTES:

1. $R0 = R1 = R2 = R3 = 330\Omega$.
2. D0 IS 2832SI.
3. D1 IS 15I.
4. D2 IS 1210G.
5. D3 IS CRS1DI.
6. D4 IS 2832SUG.
7. D5 IS 15Y.
8. D6 IS 1210Y.
9. D7 IS CRS10G.


11 CIRCUITS

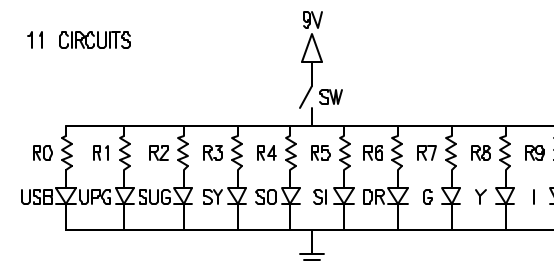

NOTES:

1. $R0 = R1 = 270\Omega$, $R2 \sim R9 = 330\Omega$.


WHITE



NOTES:

1. $R0 = R1 = R2 = 270\Omega$.
2. D0 IS 2832. D1 IS 0603.
D2 IS L1209.

RIGHT ANGLE



NOTES:

1. $R0 = R1 = R2 = R3 = 330\Omega$.
2. D0 IS 2432. D1 IS 305.
D2 IS 851, D3 IS LXR44.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=^{+DECIMAL PRECISION}_{-0.00} MAX.=^{+0.00}_{-DECIMAL PRECISION}

REV.

PART NUMBER
SMT-BOX

SMT DISPLAY BOX

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY:

BC

CHECKED BY:

APPROVED BY:

DATE: 5.21.02

PAGE: 2 OF 2

SCALE: N/A