

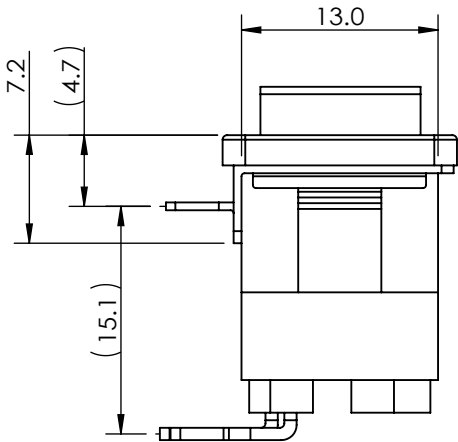
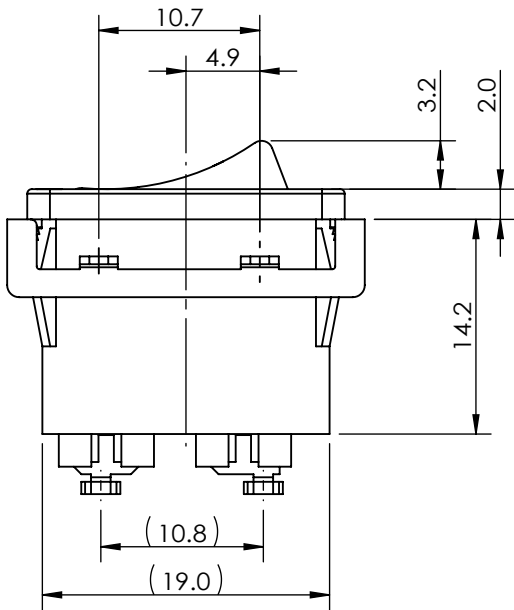
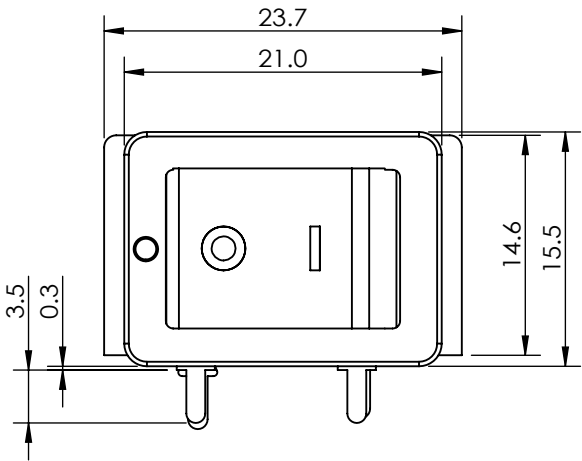
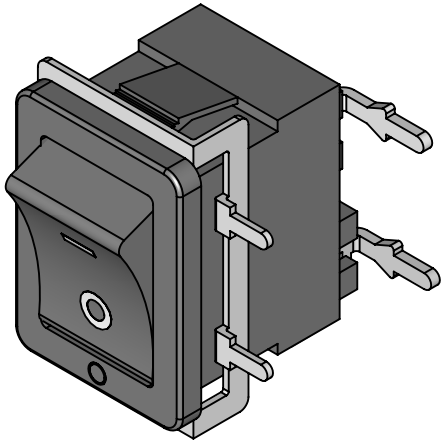


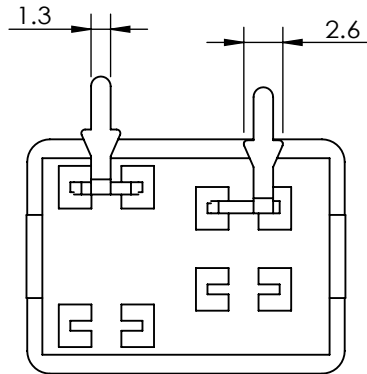

RECOMMENDED PC HOLE PATTERN

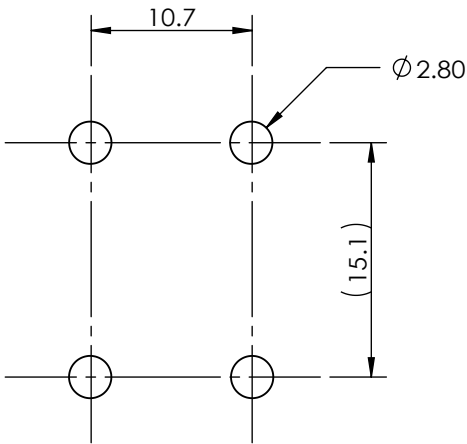


CHARACTERISTICS:

- CONTACT ARRANGEMENT: SPST MAINTAINED ACTION
- ELECTRICAL RATING: 12 AMPS 125/250 VAC (UL & CSA)
- INRUSH CURRENT RATING: 125 AMPS @ 25 VDC
- CONTACT GAP: .12 (3.0)
- ELECTRICAL LIFE: 10,000 CYCLES
- DIELECTRIC STRENGTH: 1000 VAC MIN
- TERMINALS: SILVER PLATED COPPER
- CONTACTS: SILVER ALLOY
- PLASTICS: NYLON 66, 94V-2
- ROCKER COLOR: MATTE FINISH BLACK
- ROCKER MARKING (I/O) COLOR: WHITE
- CASE COLOR: MATTE FINISH BLACK
- MOUNTING BRACKET: .020 (0.51) THK TIN PLATED CRS

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY AND ARE IN INCHES (MILLIMETERS).
2. "O" INDICATES OFF POSITION.



SCHEMATIC

DWG TYPE SALES DRAWING	DRAWN c.c.	TOLERANCES: UNLESS OTHERWISE NOTED X.X ± 0.5 X.XX ± 0.2 ANGULAR ±5°	DWG TITLE HIGH INRUSH MINI-ROCKER SWITCH						
STATUS RELEASE	REVIEW --		DWG NO. M372-899-156						
This document is the intellectual property of ITW Electronic Business Asia Co., Limited and may contain confidential, proprietary, privileged information protected by law. Neither this document nor any information it contains can be reproduced, transformed to any other format, or distributed, without written permission by ITW Electronic Business Asia Co., Limited. 本文作為安天德百電股份有限公司之智慧財產，非經許可不得翻取、複製、轉變成其他形式使用或散佈	APPROVED v.v.	THIRD ANGLE PROJECTION							
	DATE 2018.01.15	REF: ---	■ 管制文件 □ 非管制文件	Unit mm	SCALE 3 : 2	REV 2	RoHS Compliant	SHEET 1 OF 2	