

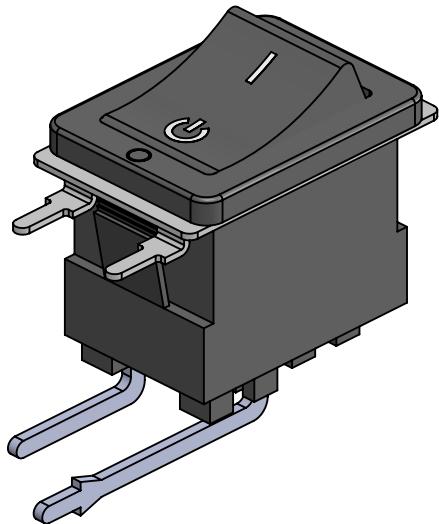
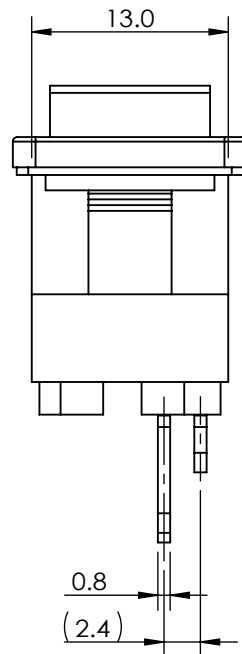


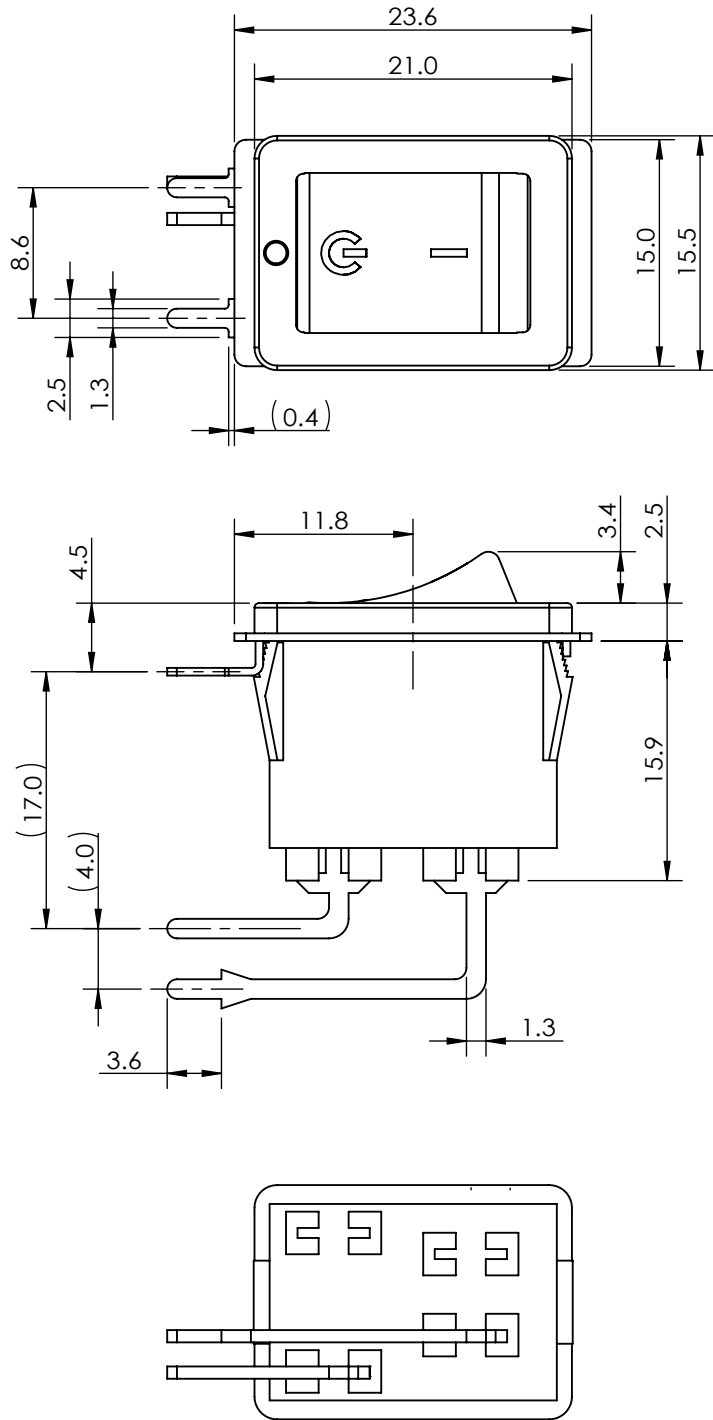

RECOMMENDED PC HOLE PATTERN

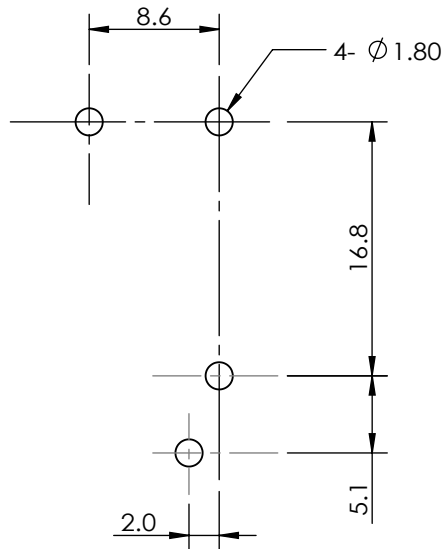

CHARACTERISTICS:

CONTACT ARRANGEMENT: SPST MAINTAINED ACTION

ELECTRICAL RATING: 12 AMPS 125/250 VAC (UL & CSA)

INRUSH CURRENT RATING: 125 AMPS @ 25 VDC

CONTACT GAP: .12 (3.0)

ELECTRICAL LIFE: 10,000 CYCLES

DIELECTRIC STRENGTH: 1000 VAC MIN

TERMINALS: SILVER PLATED COPPER

CONTACTS: SILVER ALLOY

PLASTICS: NYLON 66, 94V-2

ROCKER COLOR: MATTE FINISH BLACK


ROCKER MARKING COLOR: WHITE

CASE COLOR: MATTE FINISH BLACK

MOUNTING BRACKET: .020 (0.51) THK TIN PLATED CRS

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY AND ARE IN MILLIMETERS.
2. " ($\begin{smallmatrix} | \\ | \end{smallmatrix}$) " INDICATES STANDBY POSITION.



SCHEMATIC

DWG TYPE SALES DRAWING	DRAWN c.c.	TOLERANCES: UNLESS OTHERWISE NOTED X.X ± 0.5 X.XX ± 0.2 ANGULAR ±5°	DWG TITLE HIGH INRUSH MINI-ROCKER SWITCH							
STATUS RELEASE	REVIEW --		DWG NO. M372-899-158							
This document is the intellectual property of ITW Electronic Business Asia Co., Limited and may contain confidential, proprietary, privileged information protected by law. Neither this document nor any information it contains can be reproduced, transformed to any other format, or distributed, without written permission by ITW Electronic Business Asia Co., Limited. 本文件為安捷百電股份有限公司之智慧財產，非經許可不得擷取、複製、轉變成其他形式使用或散佈	APPROVED v.w.	THIRD ANGLE PROJECTION 								
	DATE 2018.01.15	REF: ---	☒ 管制文件 ☐ 非管制文件	Unit mm	SCALE 2 : 1	REV 2				