

REPLACES PART: OED-SG-23FH-300RBI

ELECTRO-OPTICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST COND
INPUT:						
FORWARD VOLTAGE	V_f		1.2	1.5	V	$I_f = 30\text{ mA}$
REVERSE CURRENT	I_r			10	μA	$V_r = 5\text{ V}$
OUTPUT:						
COLLECTOR DARK CURRENT	I_{ceo}			0.1	μA	$V_{ce} = 10\text{ V}$ $I_f = 20\text{ mA}$
COLLECTOR LIGHT CURRENT	I_L	0.3			mA	$V_{ce} = 5\text{ V}$ $I_f = 20\text{ mA}$
C/E SATURATION VOLTAGE	$V_{cc(sat)}$			0.4	V	$I_f = 30\text{ mA}$ $I_c = 0.1\text{ mA}$
SWITCHING SPEEDS:						
RISE TIME	T_r		5		μS	$V_{cc} = 5\text{ V}$ $I_c = 2\text{ mA}$
FALLING TIME	T_f		5		μS	$R_I = 100\ \Omega$

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	SYMBOL	MAX	UNITS
INPUT:			
REVERSE VOLTAGE	V_r	5	V
POWER DISSIPATION	P_d	100	mW
FORWARD CURRENT	I_f	60	mA
OUTPUT:			
COLLECTOR POWER DISSIPATION	P_c	100	mW
COLLECTOR CURRENT	I_c	40	mA
C-E VOLTAGE	V_{ceo}	30	V
E-C VOLTAGE	V_{eco}	5	V
OPERATING TEMP.	$T_{opr.}$	-20 TO +85	$^\circ\text{C}$
STORAGE TEMP.	$T_{stg.}$	-30 TO +85	$^\circ\text{C}$
SOLDERING TEMP.	$T_{sol.}$	+240	$^\circ\text{C}$
2.0mm FROM BODY	dist.		5 SEC. MAX

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.


LUMEX
INCORPORATED

 290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
(847) 359-2790


CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INCORPORATED. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INCORPORATED, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 1-5-98	DWN:	CHK'D:	APPD:
SCALE: N/A			
PHOTO INTERRUPTER.			
PAGE 1 OF 1	DRAWING NUMBER OED-SI3292-2TV-300		REV

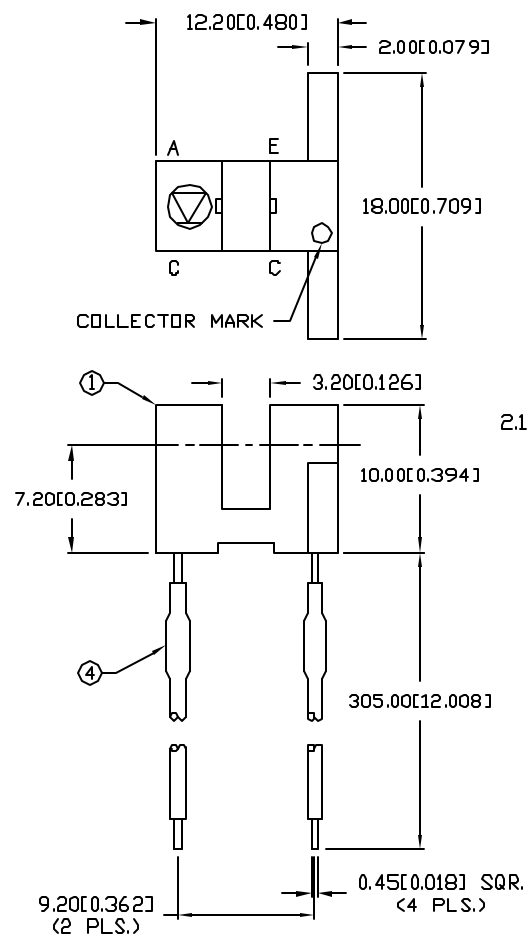

TOP VIEW PIN LAYOUT

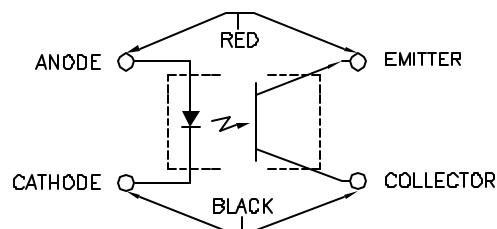

NOTES:

- OED-SG-23FH.
- 24 AWG, STRANDED, 305mm (12'), RED INSULATION, STRIP 11mm.
- 24 AWG, STRANDED, 305mm (12'), BLACK INSULATION, STRIP 11mm.
- CRIMP LEAD WIRES AS SHOWN. INSULATE WITH HEAT SHRINK TO WITHIN 3mm OF HOUSING.