

SWITCH FUNCTION CODE	SWITCH FUNCTION DESCRIPTION
1	MECHANICAL,MOMENTARY,SOLDE R TERMINAL
A	MOMENTARY,NORMAL OPEN (NO), WIRE LEADS
C	MOMENTARY,NORMAL CLOSE (NC), WIRE LEADS
E	MOMENTARY,NORMAL OPEN/NORMAL CLOSE (NO/NC), WIRE LEADS

HOUSING TYPE CODE	HOUSING TYPE DESCRIPTION
RBK	ROUND,BLACK

LED COLOR CODE	LED COLOR
N	NONE
G	GREEN
R	RED
B	BLUE
W	WHITE
Y	YELLOW


BUTTON COLOR CODE	BUTTON COLOR
RD	RED
GR	GREEN
BK	BLACK
BL	BLUE
YL	YELLOW
OR	ORANGE

MOUNTING TYPE CODE	MOUNTING TYPE
B	BUSHING

LED INLET VOLTAGE CODE		LED INLET VOLTAGE
NON— WIRELEADS	IF BLANK*	FOLLOW LED SPECIFICATION
WIRELEADS	IF BLANK*	FOLLOW LED SPECIFICATION
	05	5V
	12	12V
	24	24V

ANY CODE	DESCRIPTION
IF BLANK*	NA
XXX	PER CUSTOMER SPECIAL REQUEST

MECHANICAL CHARACTERISTICS:
 SWITCH CIRCUITRY: SPDT-DB
 SWITCH ACTION: MOMENTARY (PER CHART)
 PRE-TRAVEL: 1.27 mm NOMINAL
 OVER-TRAVEL: 0.254 mm NOMINAL
 TOTAL TRAVEL: 1.524 mm NOMINAL
 OPERATING FORCE: 525 g [5.15 N] NOMINAL
 RELEASEING FORCE: 340 g [3.45 N] NOMINAL
 PANEL THICKNESS: 0.5 - 3.0mm



SPDT-DB


SCHEMATIC

LED SPECIFICATION				
LED CODE	LED Color	CIRCUITRY	Vf(VDC)	If (mA)
			Color	
R	RED		1.8 ~ 2.5	20
B	BLUE		2.8 ~ 3.5	20
G	GREEN		2.8 ~ 3.5	20
Y	YELLOW		1.8 ~ 2.5	20
W	WHITE		2.8 ~ 3.5	20

Notes:

1.) Hand Soldering Temperature (4mm above from Body) : 320°C for 3 seconds

WIRELEADS SPECIFICATION					
WIRELEADS TYPE	WIRELEADS SPECIFICATION	SW TERMINAL	SW TERMINAL	LED	
				COLOR	
		NO	NC	+	-
ILLUMINATION	AWG24 / UL1007	BLUE	YELLOW	RED	BLACK
NON-ILLUMINATION		BLUE	YELLOW	-	-

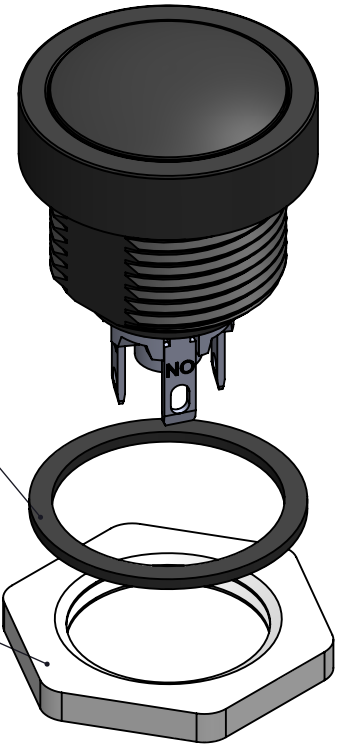

SEALING WASHER ;T=0.80

SPECIAL HEX NUT
HEX 22, T=2.30

CONTACTS: SILVER
NUT TORQUE FORCE: MAX 6 kgf*cm [5.2 LB*in]

ELECTRICAL LIFE :
5A@28VDC,25K CYCLES NOMINAL.
MECHANICAL LIFE:
MOMENTARY: 1,000,000 CYCLES NOMINAL.

ENVIRONMENTAL SPECIFICATIONS:
OPERATING TEMPERATURE: -40°F to +185°F [-40°C to +85°C]
IP67

ELECTRICAL SPECIFICATIONS :
DIELECTRIC STRENGTH: 1,000VAC
INSULATION RESISTANCE: 1G OHM
CONTACT RESISTANCE:
50m/250m OHMS MAX INITIAL(NON-WIRELEAD/WIRELEADS)

LED SPECIFICATIONS & WIRELEADS SPECIFICATIONS:
SEE LED SPECIFICATION
SEE WIRELEADS SPECIFICATION

CERTIFICATION:UL 61058

*** NOTE:**
1.SUPPLY HEX NUT AND SEALING WASHER BULK IN PACKED

DWG TYPE SALES DRAWING	DRAWN <i>H.W</i>	TOLERANCES: UNLESS OTHERWISE NOTED X.X ± 0.5 X.XX ± 0.2 ANGULAR ± 5°	DWG TITLE SA50-MECHANICAL MOMENTARY					
STATUS RELEASE	REVIEW <i>H.W</i>		DWG NO. SA50-1,A,C,E					
This document is the intellectual property of ITW Electronic Business Asia Co., Limited and may contain confidential, proprietary, privileged information protected by law. Neither this document nor any information it contains can be reproduced, transformed to any other format, or distributed, without written permission by ITW Electronic Business Asia Co., Limited. 本文件為安達德百電股份有限公司之智慧財產，非經許可不得擷取、複製、轉變成其他形式使用或散佈	APPROVED <i>V.W.</i>	THIRD ANGLE PROJECTION 					RoHS Compliant	SHEET 1 OF 3
	DATE 2018.10.16	REF: ---	☒ 管制文件 ☐ 非管制文件	Unit mm	SCALE 2 : 1	REV 3		



