UNCONTROLLED DOCUMENT COMPANY CONFIDENTIAL SC:0.25 PART NUMBER REV. SMH-R2123 P1 FACTORY PART# PRELIMINARY IN P/N DIR 4.32 [0.170] 3.50 [0.138] -3.40 [0.134] 0.20 [0.008] 0.80 [0.031] 1.80 [0.071] → (2 PLS₁) SQR. (2 PLS.) 1.80 [0.071] 0.80 [0.031] (2 PLS.) (4 PLS) 5.08 [0.200] 9.65 [0.380] 2.54 [0.100] 0.25 [0.010] **--** 1.75 [0.069] 0.80 [0.031] 0.70 [0.028] Ø2.90 [Ø0.114] 0.70 [0.028] COMMON SQR. (2 PLS.) (3 PLS_i) (2 PLS.) CATHODE 0.54 [0.021] **₽** (2 PLS₁) 4.25 [0.167] 6.00 [0.236] \mathbf{R} 1.27 [0.050] (2 PLS.)

*UNLESS OTHERWISE SPECIFED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.0102), LEAD LENGTH=±0.75 (±0.030). MN==+0.000 MAX.=+0.05 (±0.0104), MN==+0.000 MAX.=+0.05 (±0.0104), MN==+0.000 MAX.=+0.000 MAX.=+0

PART NUMBER

P1 SMH-R2123

RIGHT ANGLE, SURFACE MOUNT, TWO HIGH FAULT INDICATE

RIGHT ANGLE, SURFACE MOUNT, TWO HIGH FAULT INDICATOR,
DESIGNED FOR USE WITH SML-LX23 SERIES LED.

Confidential Information

The Information Contained in this document is the property of Lumex ing. Except as specifically authorized in Writing by Lunex ing. The holder of this document shall keep all information contained herein confidential and shall protect same in Whole or in Part from discussive and dissemnation to all third parties.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com

DRAWN BY: CHECKED BY: APPROVED BY: DATE:

AWN BY: CHECKED BY: APPROVED BY: DATE: 6.27.03
PAGE: 1 OF 2
BC/CK SCALE: N/A

UNCONTROLLED DOCUMENT COMPANY CONFIDENTIAL

SC:0.25


PART NUMBER

REV.

FACTORY PART#

SMH-R2123

PRELIMINARY IN P/N DIR

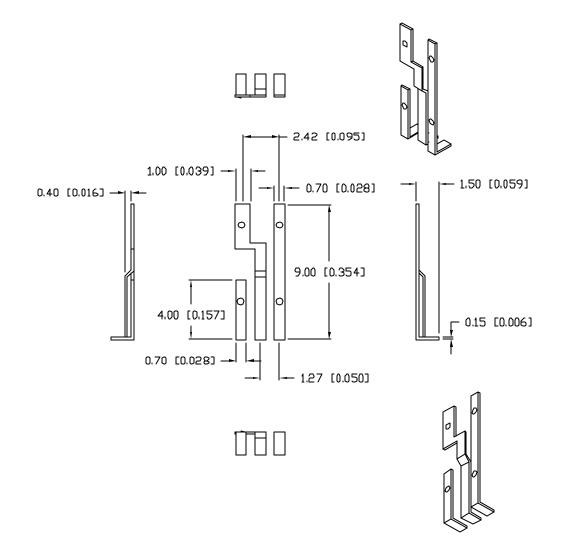

*UNLESS OTHERWISE SPECIFED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MN=+DECIMAL PRECISION MAX.=+0.000

REV.

PART NUMBER SMH-R2123

LEAD FRAME FOR SMH-R2123 HOLDER.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 6.27.03 PAGE: 2 OF 2

SCALE: N/A

BC/CK