

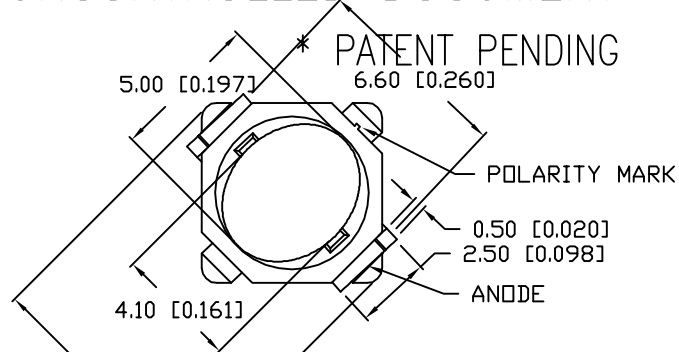
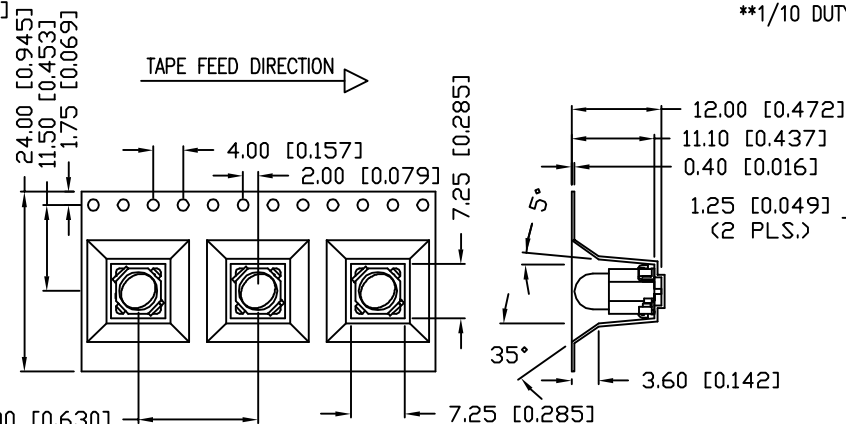



UNCONTROLLED DOCUMENT

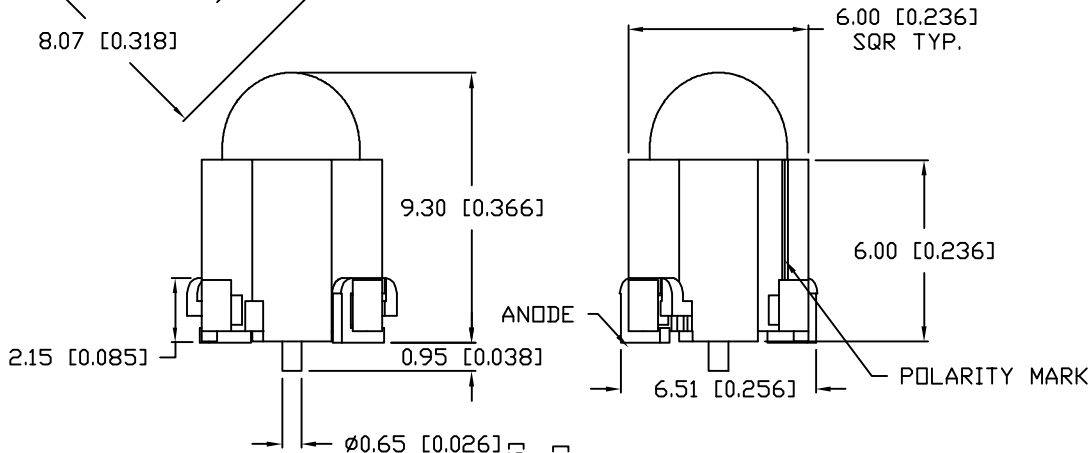

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.



TOTAL TIME ABOVE 220°C IS 60 SECONDS MAX. 16.00 [0.630]  7.25 [0.285]

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+DECIMAL PRECISION -0.00, MAX.=+0.00 -DECIMAL PRECISION

PART NUMBER		REV.
SML-H150E5USB-TR		A
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11599.	11.20.09

ELECTRO—OPTICAL CHARACTERISTICS			T _A =25°C	I _f = 20MA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		465		nm	
FORWARD VOLTAGE	2.8		3.6	V _f	
REVERSE VOLTAGE	5.0			V _r	I _r =100μA
AXIAL INTENSITY*	1260		3125	mcd	I _f = 20MA
VIEWING ANGLE (X)		55		2x theta	
VIEWING ANGLE (Y)		35		2x theta	
EMITTED COLOR:	BLUE				
EPOXY LENS FINISH:	BLUE DIFFUSED				


LIMITS OF SAFE OPERATION AT 25°C PER DIE

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT**	100	mA
STEADY CURRENT	20	mA
POWER DISSIPATION	80	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING TEMP.	- 30 TO + 80	°C
STORAGE TEMP.	- 40 TO + 100	°C
SOLDERING TEMP.	+ 260	°C
2.0mm FROM BODY		5 SEC. MAX

**1/10 DUTY CYCLE, 0.1mS PULSE WIDTH

RECOMMENDED PAD LAYOUT

*AXIAL INTENSITY BINS		
BIN	INTENSITY@20mA	
	MIN (mcd)	MAX (mcd)
1	1260	1575
2	1575	2000
3	2000	2500
4	2500	3125

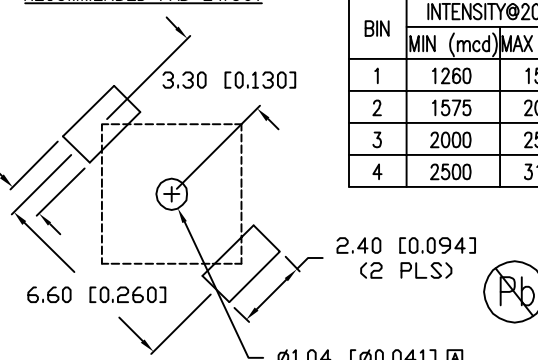

REV. A	PART NUMBER SML-H150E5USBD-TR	CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES. RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.	 290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw
5X4mm ELLIPTICAL SURFACE MOUNTED DOME LED, 470nm ULTRA SUPER BLUE LED, BLUE DIFFUSED.		JN	DRAWN BY: _____ CHECKED BY: _____ APPROVED BY: _____ DATE: 03.26.09 PAGE: 1 OF 2 SCALE: N/A